







DISCOVER

FILIX

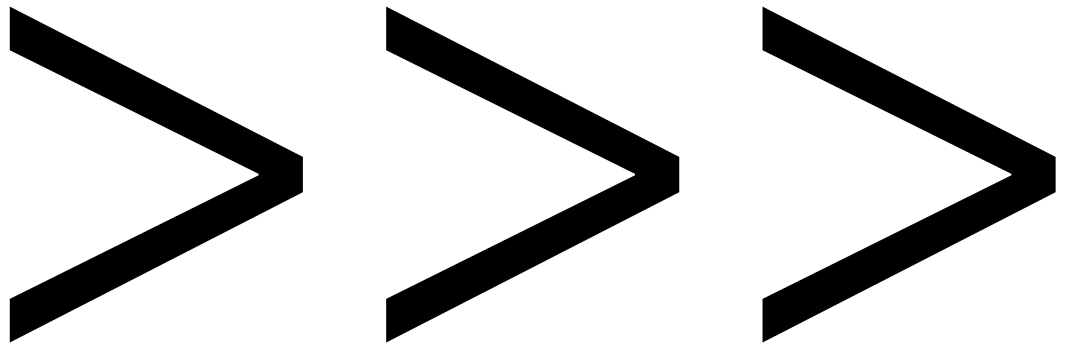

Filix, a manufacturer of world-class lighting products and systems used by lighting designers, architects and engineers to illuminate interior and exterior architecture.

>

Filix designs, engineers and manufactures high-quality, high-performance LED lighting instruments for outdoor and indoor applications. We design our products to fit seamlessly within the architecture, offering an aesthetic solution during the day. The optical systems are designed to provide industry-leading performance, directing light where intended while eliminating glare. Lastly, Filix products are engineered and tested to survive in any outdoor environment. We believe in sustainable products made from materials that are optimal for the environment where they are installed and easily maintainable LED engines and power supplies to ensure the long life of the installation.

Located in the beautiful Istrian Peninsula of Croatia, Filix takes its cues from our neighbors, Italy and Austria. Our culture is based on respect for natural resources and the desire to bring beauty and quality to all we do.

ABOUT

FILIX

About R&D

Our goal is to develop families of products to allow designers to create environments and effects with a minimum number of products, all with a common language. All Filix products are designed, engineered and tested in-house, ensuring that they abide by our high standards of quality and performance in order to deliver the very best lighting instruments to our customers.

How we do it

By designing all products inside the company, Filix maintains control over every component that goes into each product. All new products, as well as custom products, go through rigorous environmental testing to ensure that the product will perform in all environments and maintain sustainability whether installed under the water, in the ground, driven over by trucks or exposed to climate extremes. Only when the stringent design parameters are met does the product go into production.

Filix Lighting Team


Filix maintains a very close relationship with the market through our worldwide network of lighting sales agencies, as well as direct involvement with designers throughout Europe, Asia and the USA. The Filix sales department and the application engineering and design departments are in daily contact with product users and influencers, gaining valuable insight into the uses of our products and potential new products. Through these relationships we gain ideas that guide us in the development of the Filix range of products.

CONTENTS

RDD35	9	ZERO G	93
RDP35	13	ETER	97
RDW35	17	STEP UP DECO	101
SQD35	21	SLIM	105
SQP35	25	SNAKE	109
SQW35	29	SNAKE DECO	113
FARO 60	33	ION SWITCH	117
CRD 60	37	ION MATRIX	121
CSD 60	41	HYPERION	125
RDT 60	45	HYPERION WALL	129
RDD 60	49	HEMERA	133
RDP 60	53		
RDW 60	57	ARPOOL S PROJECTOR	137
RDT 100	61	ARPOOL M PROJECTOR	141
RDD 100	65	AARPOOL XM PROJECTOR	145
RDP 100	69	ARPOOL S	149
RDW 100	73	ARPOOL M	153
RDD 140	77	ARPOOL XM	157
SQD 100	81	ARPOOL L	161
SQP 100	85	ARPOOL DAWN	165
SQW 100	89	ARPOOL NEXUS	169
		ARPOOL LIN REC.	173
		ARPOOL STYLE	177
		ARPOOL LIN SURF.	181



RDD35 Deco

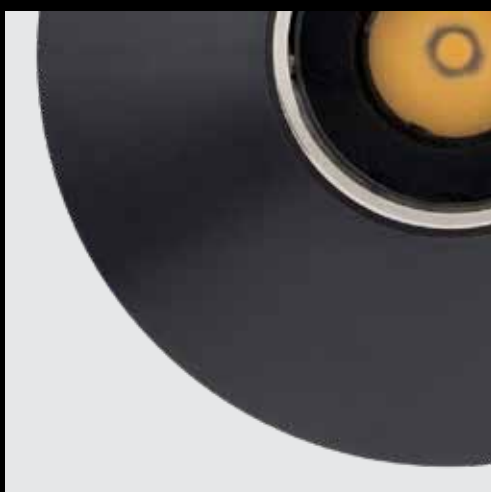

Round LED uplight with high performance optics for outdoor and indoor use, floor and wall installation.

ABS housing with flush clear tempered glass lens for trim and trimless integration into grade. Recessed low glare led source. Drive over rated.



RDD35 Deco

> Electrical

24 VDC fixture voltage
L - 1,2W - 68 lm
H - 3W - 186 lm

> Technical

IP67	Clear tempered glass
CLASS III	3/8" (10mm)
IK09	Stainless steel (304) ring
UL STD 1598	Aluminium body
Drive over	ABS installation housing
rated 1500 kg	
(3000lb)	

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: >85

> Optics



SP Spot 17°




FL Flood 41°




GR Graze 13°x41°

> Installation

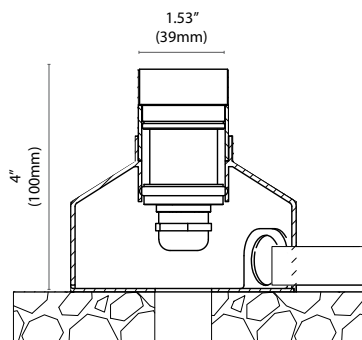

Concrete



Tiles

> Installation housing order codes

RD35C - Concrete

RD35T - Tiles

Ordering Information

RDD35					24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDD35	TM	L	27	SP	24	C - standard length 1' (0.3m)
	TS	H	30	FL		C3 - 3m (10') cable length
			40	GR		C6 - 6m (20') cable length C9 - 9m (30') cable length



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)



RDP35 Paver



Round LED marker light for outdoor and indoor use, floor and wall installation. Aluminum housing with flush clear tempered glass lens for trim and trimless integration into grade.
Recessed low glare led source.
Drive over rated.



RDP35 Paver

> Electrical

24VDC fixture voltage

L - 1,2W - 26 lm

H - 3W - 65 lm

> Technical

IP67

CLASS III

IK09

UL STD 1598

Drive over

rated 1500

KG (3000lb)

Low glare

Stainless steel (304) ring

Aluminium body

ABS installation housing

> Color

27 - 2700K

30 - 3000K

40 - 4000K

2 Step MacAdam


CRI: > 85

> Optics




LL even
illumination

> Installation

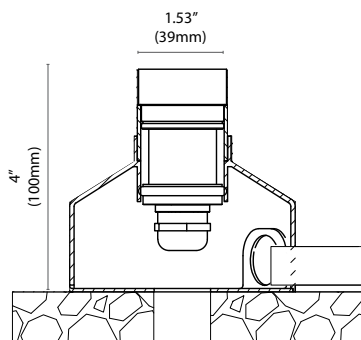

Concrete



Tiles

> Installation housing order codes

RD35C - Concrete

RD35T - Tiles


Ordering Information

RDP35				LL	24		
Model	Installation	Power	Color Temp.	Optics	Voltage	Options	
RDP35	TM TS	L H	27	LL	24	C	C - standard length 1' (0.3m)
			30			C3	C3 - 3m (10') cable length
			40			C6	C6 - 6m (20') cable length
						C9	C9 - 9m (30') cable length



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

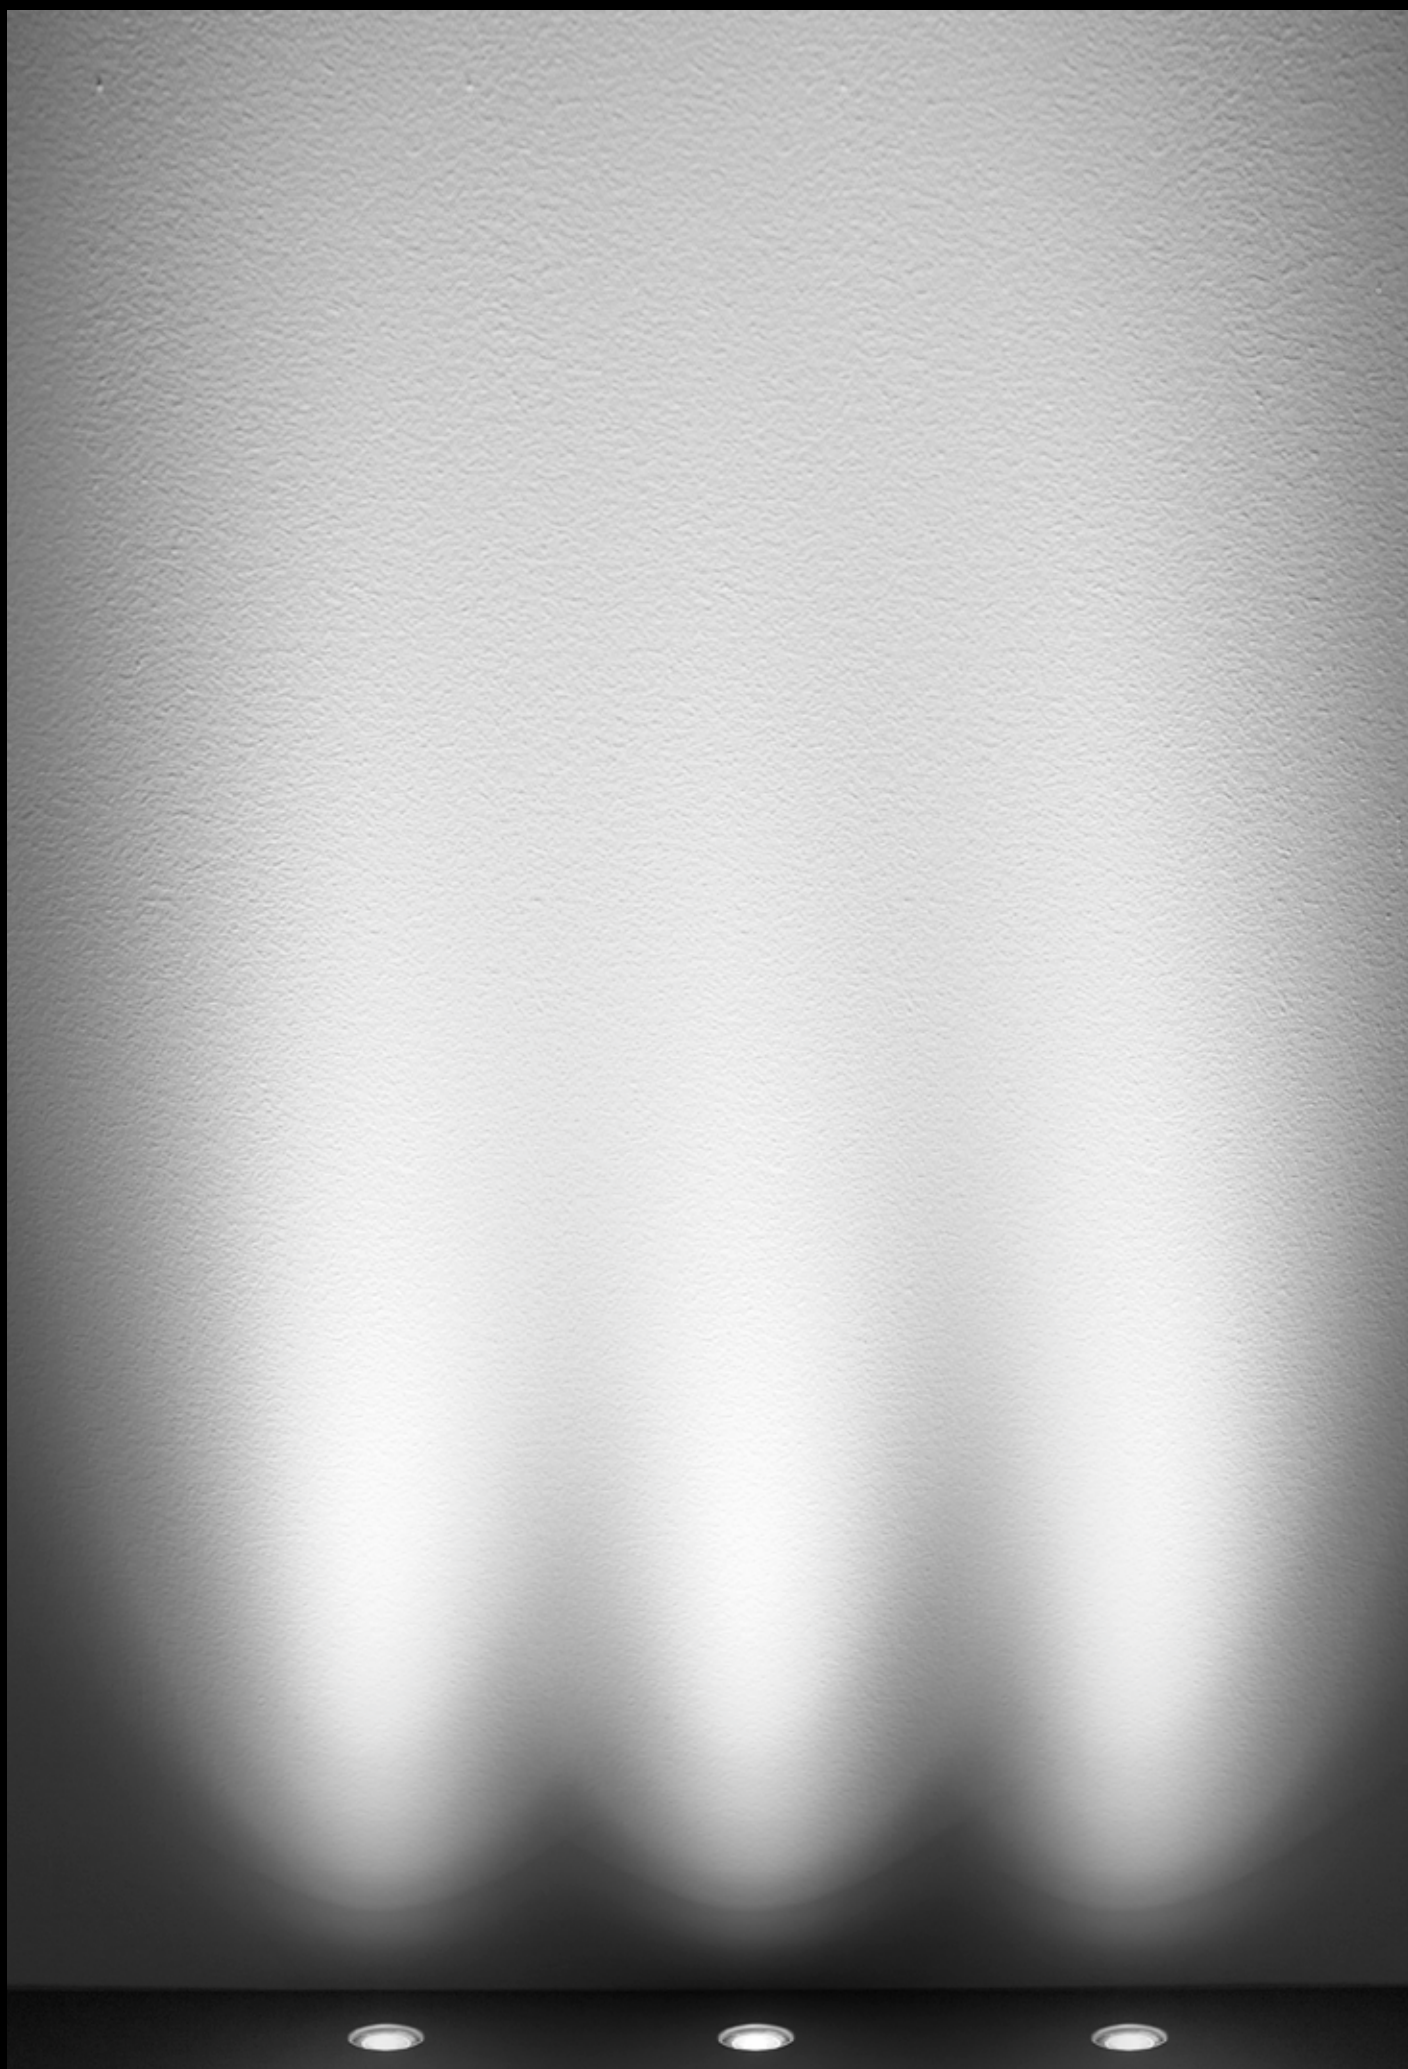

RDW35 WallWash



Round LED wallwash asymmetric uplight with high performance optics for outdoor and indoor use, floor and wall installation. ABS housing with flush clear tempered glass lens and stainless steel ring for trim and trimless integration. Recessed no glare led source with AGS - ANTI GLARE SYSTEM



RDW35 WallWash

> Electrical

24 VDC fixture voltage

L - 1,2W - 15 lm

H - 3W - 32 lm

> Technical

IP67

CLASS III

IK09

UL STD 1598

Drive over
rated 1500 kg
(3000lb)

Clear tempered glass

3/8" (10mm)

Stainless steel (304) ring

Aluminium body

ABS installation housing

> Color

27 - 2700K


30 - 3000K

40 - 4000K

2 Step MacAdam


CRI: >85

> Optics




WW WallWash
26x37° tilt 14°

> Installation

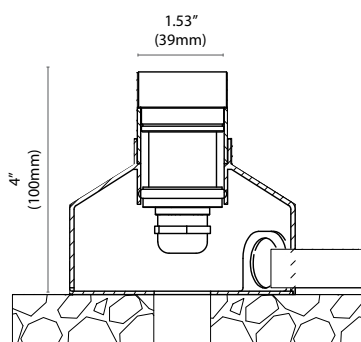

Concrete



Tiles

> Installation housing order codes

RD35C - Concrete

RD35T - Tiles

Ordering Information

RDW35					24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDW35	TM	L	27	WW	24	C - standard lenght 1'(0.3m)
	TS	H	30			C3 - 3m (10') cable lenght
			40			C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght



Power Supply


On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)



SQD35 Deco



Square LED uplight with high performance optics for outdoor and indoor use, floor and wall installation. ABS housing with flush clear tempered glass lens for trim and trimless integration into grade. Recessed low glare led source. Drive over rated.

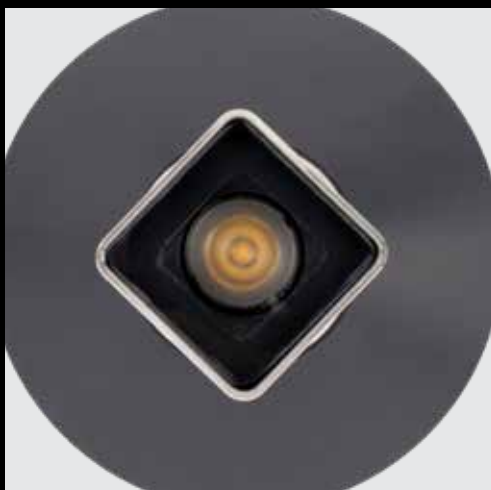

SQD35 Deco

> Electrical

24 VDC fixture voltage

L - 1,2W - 68 lm

H - 3W - 186 lm

> Technical

IP67

CLASS III

IK09

UL STD 1598

Drive over
rated 1500 kg
(3000lb)

Clear tempered glass

3/8" (10mm)

Stainless steel (304) ring

Aluminium body

ABS installation housing

> Color

27 - 2700K

30 - 3000K

40 - 4000K

2 Step MacAdam

CRI: >85

> Optics



SP Spot 17°




FL Flood 41°




GR Graze 13°x41°

> Installation

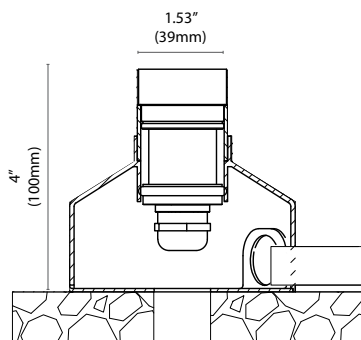

Concrete



Tiles

> Installation housing order codes

SQ35C - Concrete

SQ35T - Tiles

Ordering Information

SQD35					24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
SQD35	TM	L	27	SP	24	C - standard lenght 1' (0.3m)
	TS	H	30	FL		C3 - 3m (10') cable lenght
			40	GR		C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)



SQP35 Paver



Square LED marker light
for outdoor and indoor use,
floor and wall installation.
ABS housing with flush clear
tempered glass lens for trim and
trimless integration into grade.
Recessed low glare led source.
Drive over rated.



SQP35 Paver

> Electrical

24 VDC fixture voltage

L - 1,2W - 26 lm

H - 3W - 65 lm

> Technical

IP67

CLASS III

IK09

UL STD 1598

Drive over

rated 1500

KG (3000lb)

Low glare

Stainless steel (304) ring

Aluminium body

ABS installation housing

> Color

27 - 2700K

30 - 3000K

40 - 4000K

2 Step MacAdam


CRI: > 85

> Optics




LL even
illumination

> Installation

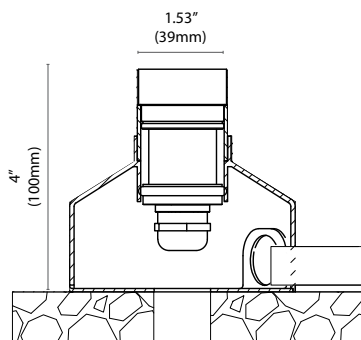

Concrete



Tiles

> Installation housing order codes

SQ35C - Concrete

SQ35T - Tiles

Ordering Information

SQP35					24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
SQP35	TM	L	27	LL	24	C - standard lenght 1'(0.3m)
	TS	H	30			C3 - 3m (10') cable lenght
			40			C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)



SQW35 WallWash



Square LED wallwash
asymetric uplight with high
performance optics for
outdoor and indoor use,
floor and wall installation.
ABS housing with flush clear
tempered glass lens and
stainless steel ring for trim and
trimless integration.
Recessed no glare led source
with AGS - ANTI GLARE
SYSTEM



SQW35 WallWash

> Electrical

24 VDC fixture voltage

L - 1,2W - 15 lm

H - 3W - 32 lm

> Technical

IP67

CLASS III

IK09

UL STD 1598

Drive over
rated 1500 kg
(3000lb)

Clear tempered glass

3/8" (10mm)

Stainless steel (304) ring

Aluminium body

ABS installation housing

> Color

27 - 2700K


30 - 3000K

40 - 4000K

2 Step MacAdam


CRI: >85

> Optics




WW WallWash
26x37° tilt 14°

> Installation

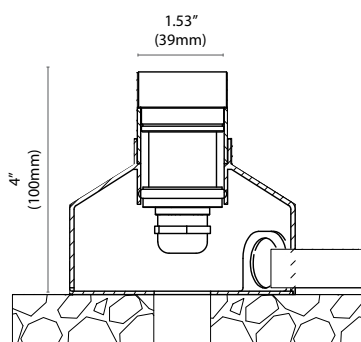

Concrete



Tiles

> Installation housing order codes

SQ35C - Concrete
SQ35T - Tiles

Ordering Information

SQW35					24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
SQW35	TM	L	27	WW	24	C - standard lenght 1'(0.3m)
	TS	H	30			C3 - 3m (10') cable lenght
			40			C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)



Faro 60



LED projector with base and spike installation, high performance optics for indoor and outdoor use. Machined aluminum housing for superior heat dissipation. Recessed low glare led source. Base and spike support for installation with 180° circular adjustabilty and 95° head adjustment.



Faro 60

> Electrical

24 VDC fixture voltage
8W - 825 Lm

> Technical

IP66
Class III
ULSTD1598
IK08
Outdoor surface mount
Spike
Tree Strap

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: 85

> Optics



SP Spot 10°



FL Flood 30°



GR Graze 49x34°

> Finish

W - RAL 9003 Structure (white)
AT - RAL 7016 Structure (grey ant.)
B - RAL 9005 Structure (black)


> Options

SK - Spike

> Accessories

FRSN - Snoot
FRST - Tree strap

> Dimensions

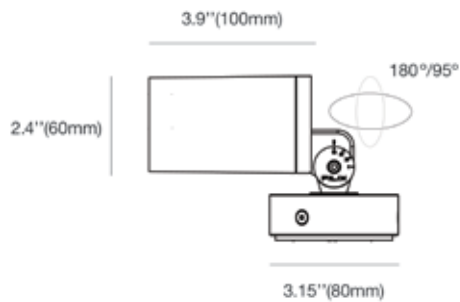

Ordering Information¹

FR60

Model	Power	Color Temp.	Optics	Finish	Options	Accessories
FR60	L	27 30 40	SP FL GR	W AT B	SK	FRSN FRTS



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)



CRD60 Deco



60mm round surface
downlight with high
performance optics for indoor
and outdoor use.

Machined aluminum housing
for heat dissipation.

Anti Glare system available
in various lumen output,
distribution and accessories.



CRD60 Deco

> Electrical

24 VDC fixture voltage
H - 8W - 410lm

> Technical

IP67
CLASSIII
UL STD 1598
Anti Glare System
Anodized + powder coating
Aluminium construction
Finish: Anthracite grey -
G -RAL7016
W - RAL9003

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



SP Spot 26°



NR Narrow 42°




EL Elliptical
60°x10°



FL Flood 68°

> Installation

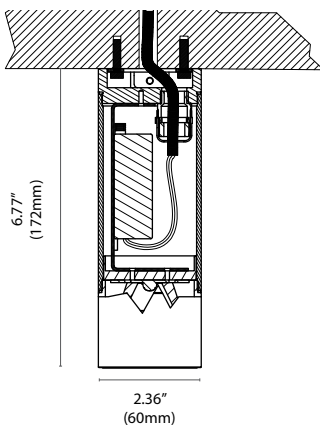

Ordering Information

CRD60	H			24		
Model	Power	Color Temp.	Optics	Voltage	Options	Finish
CRD60	H	27 30 40	SP NR EL FL	24	C - supplied without cable C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght	G - Anthracite grey (RAL7016) W - White (RAL9003)



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)



CSD60 Deco



60mm square surface
downlight with
high performance optics
for indoor and outdoor use.
Machined aluminum housing
for heat dissipation.
Anti Glare system available
in various lumen output,
distribution and accessories.



CSD60 Deco

> Electrical

24 VDC fixture voltage
H - 8W - 410lm

> Technical

IP67
CLASSIII
UL STD 1598
Anti Glare System
Anodized + powder coating
aluminium construction
Finish: Anthracite grey -
G - RAL7016
W - RAL9003

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



SP Spot 26°



NR Narrow 42°




EL Elliptical
60°x10°



FL Flood 68°

> Installation

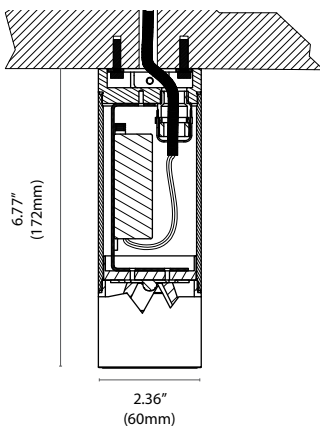


Ordering Information

CSD60	H			24		
Model	Power	Color Temp.	Optics	Voltage	Options	Finish
CSD60	H	27 30 40	SP NR EL FL	24	C - supplied without cable C6 - 6m (20') cable length C9 - 9m (30') cable length	G - Anthracite grey (RAL7016) W - White (RAL9003)



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

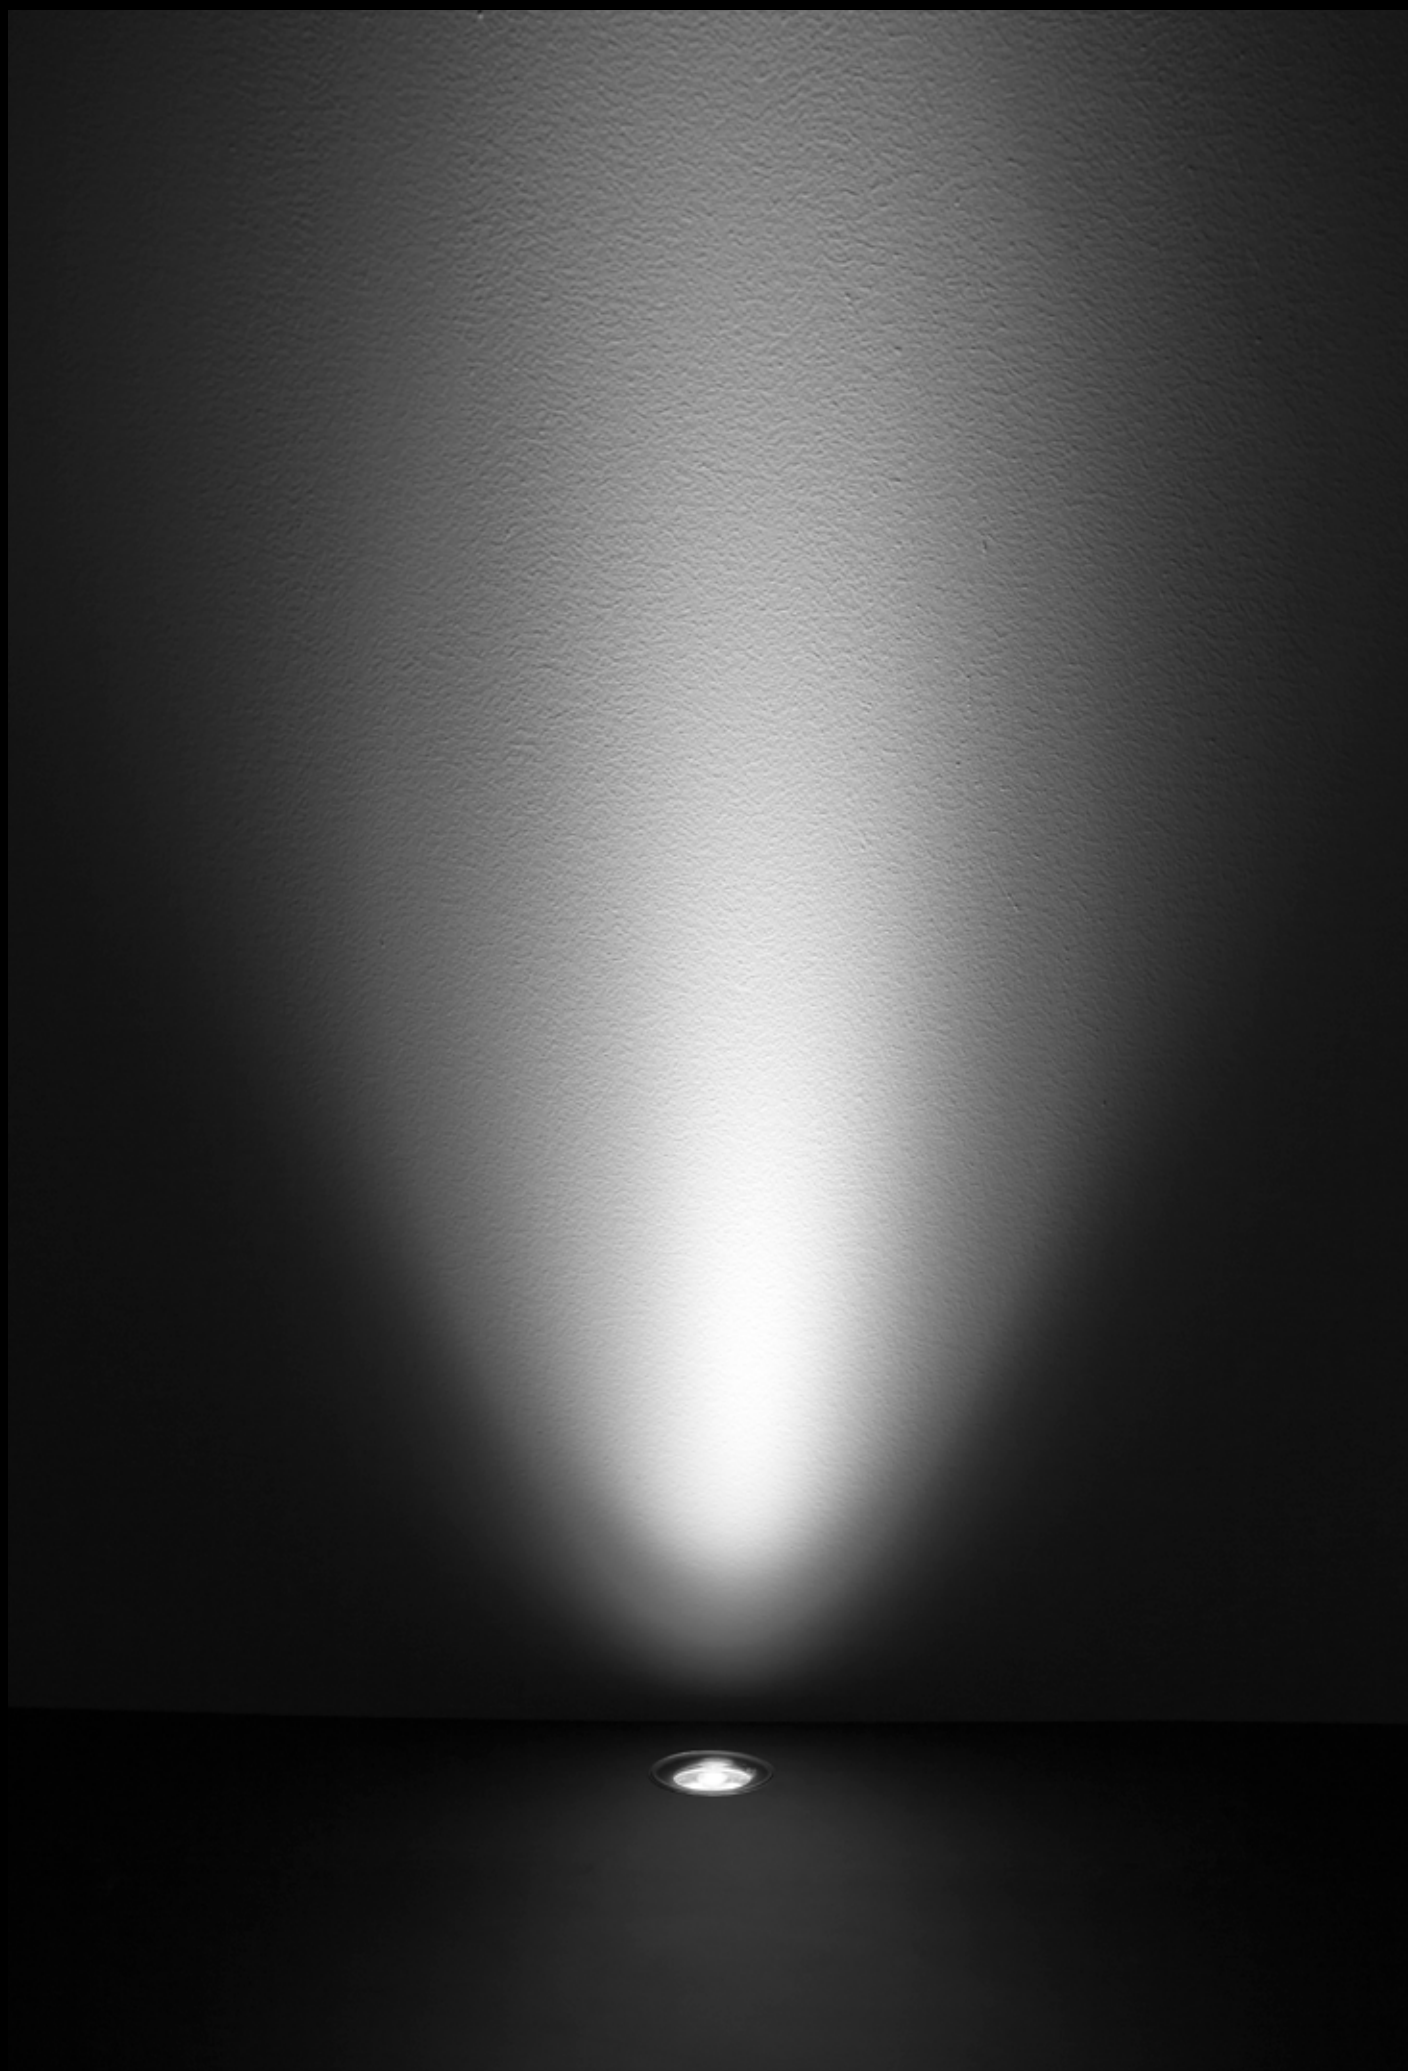

RDT60

Tilt Adjustable



Round LED uplight with high performance optics for outdoor and indoor use, floor and wall installation. ABS housing with flush clear tempered glass lens and stainless steel for trim and trimless integration into grade. Recessed low glare led source with AGS - Anti Glare System with tilt adjustable mechanism.



RDT60

Tilt Adjustable 20°

> Electrical

24 VDC fixture voltage
H - 6W - 450 lm

> Technical

IP67	Clear tempered glass
CLASS III	3/8" (10mm)
IK09	Stainless steel (304)
UL STD 1598	ring, Aluminium body
Drive over	ABS installation
rated 1500 kg	housing
(3000lb)	

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics





SP Spot 14°



FL Flood 31°

> Installation

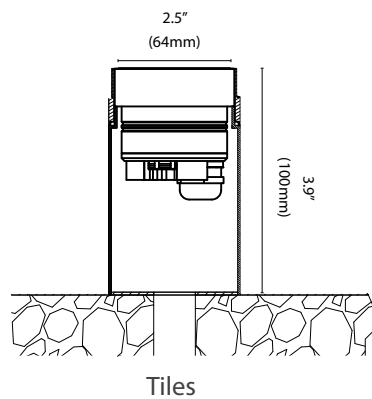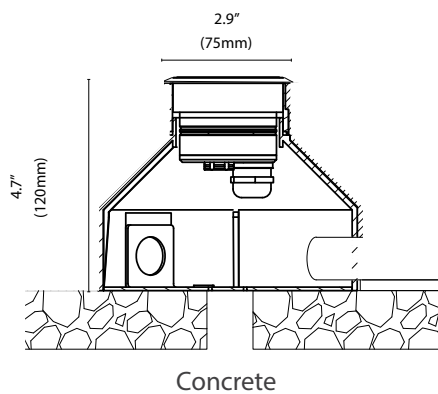

> Installation housing order codes

RD60C - Concrete

RD60T - Tiles

Ordering Information

RDT60		H			24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDT60	TM TS	H	27 30 40	SP FL	24	C - standard lenght 1' (0.3m) C3 - 3m (10') cable lenght C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P


103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)

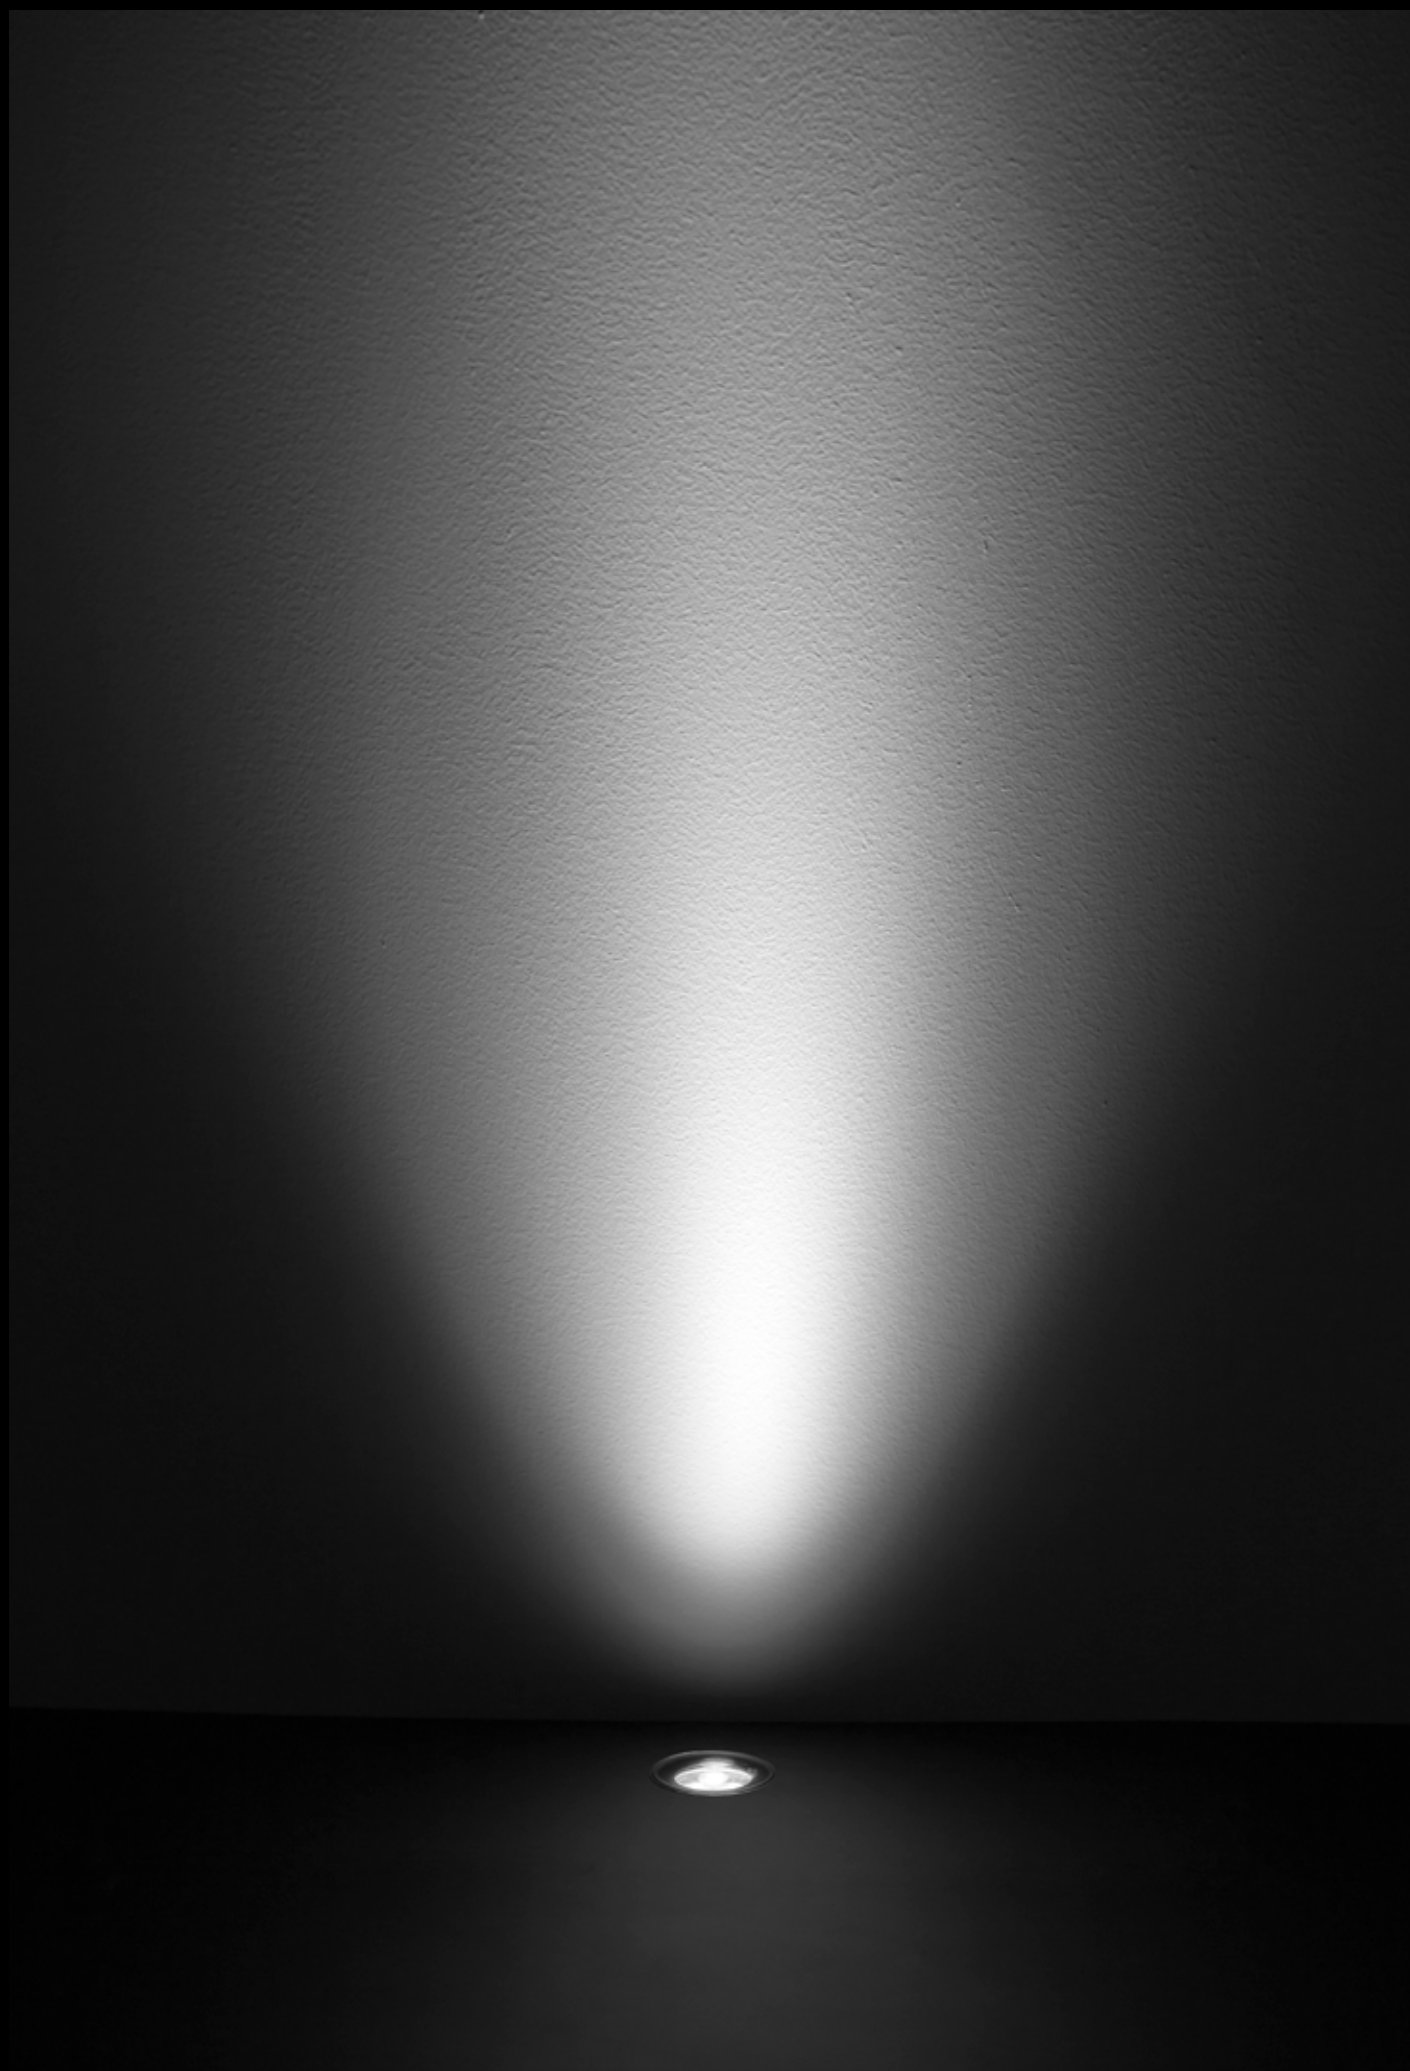

RDD60 Deco



Round LED uplight with high performance optics for outdoor and indoor use, floor and wall installation. ABS housing with flush clear tempered glass lens and stainless steel for trim and trimless integration into grade. Recessed low glare led source with AGS - Anti Glare System



RDD60 Deco

> Electrical

24 VDC fixture voltage
H - 6W - 450 lm

> Technical

IP67	Clear tempered glass
CLASS III	3/8" (10mm)
IK09	Stainless steel (304)
UL STD 1598	ring, Aluminium body
Drive over	ABS installation
rated 1500 kg	housing
(3000lb)	

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



SP Spot 14°





FL Flood 31°



W Graze 50°

> Installation

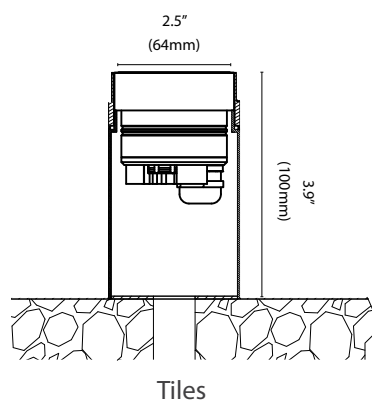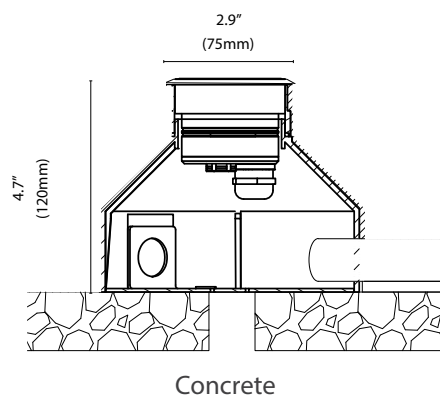

> Installation housing order codes

RD60C - Concrete

RD60T - Tiles

Ordering Information

RDD60		H			24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDD60	TM TS	H	27 30 40	SP FL W	24	C - standard lenght 1' (0.3m) C3 - 3m (10') cable lenght C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)



RDP60 Paver



Round LED marker light for outdoor and indoor use, floor and wall installation. ABS housing with flush sandblasted tempered glass lens for trim and trimless integration. Recessed low glare LED source. Drive over rated.



RDP60 Paver

> Electrical

24 VDC fixture voltage
L - 2.9W - 52 lm
H - 4W - 136 lm

> Technical

IP67	Sandblasted
CLASS III	tempered glass
IK09	3/8" (10mm)
UL STD 1598	Stainless steel (304) ring
Drive over	Aluminium body
rated 1500 KG	ABS installation
(3000lb)	housing

> Color



27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



LL even
illumination

> Installation

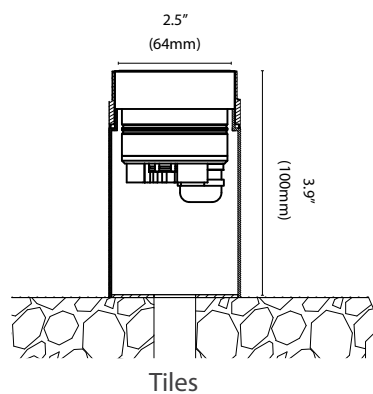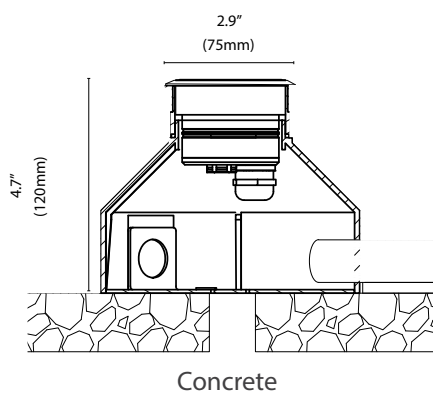

> Installation housing order codes

RD60C - Concrete

RD60T - Tiles


Ordering Information

RDP60				LL	24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDP60	TM	L	27	LL	24	C - standard lenght 1' (0.3m)
	TS	H	30			C3 - 3m (10') cable lenght
			40			C6 - 6m (20') cable lenght
						C9 - 9m (30') cable lenght



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

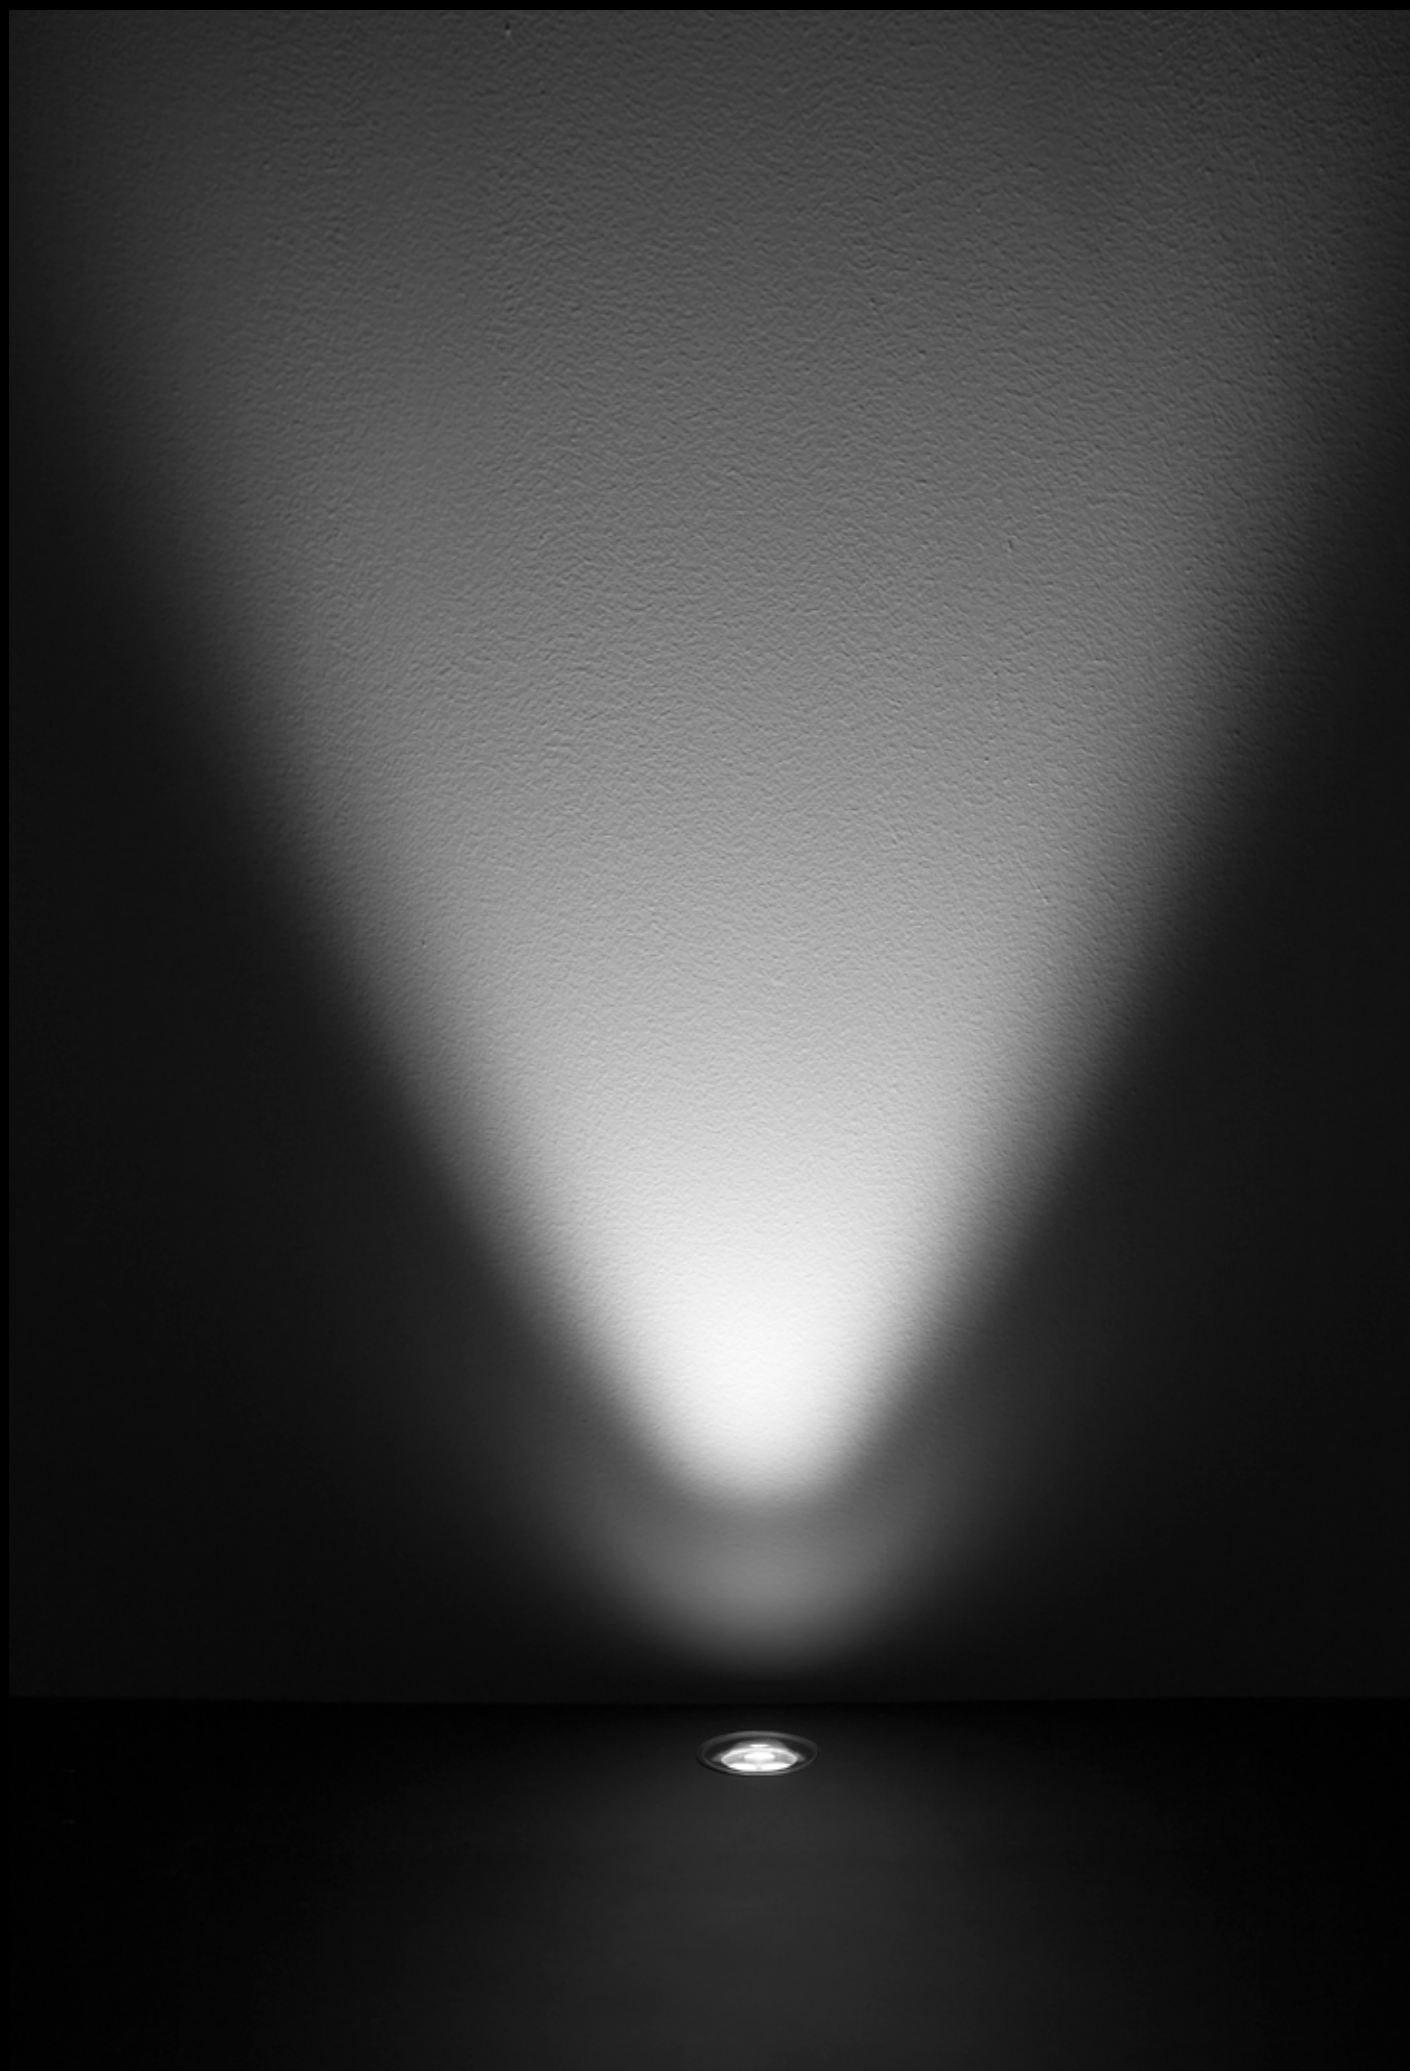

RDW60 WallWash



Round LED wallwash
asymetric uplight with high
performance optics for
outdoor and indoor use,
floor and wall installation.
ABS housing with flush
clear tempered glass lens
and stainless steel ring for
trim and trimless integration
into grade.

Recessed no glare led
source with AGS - ANTI
GLARE SYSTEM



RDW60 WallWash

> Electrical

24 VDC fixture voltage
H - 6W - 35 lm

> Technical

IP67	Clear tempered glass
CLASS III	3/8" (10mm)
IK09	Stainless steel (304) ring
UL STD 1598	Aluminium body
Drive over	ABS installation
rated 1500 kg	housing
(3000lb)	

> Color



27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



WW WallWash
32°x46° tilt 14°

> Installation

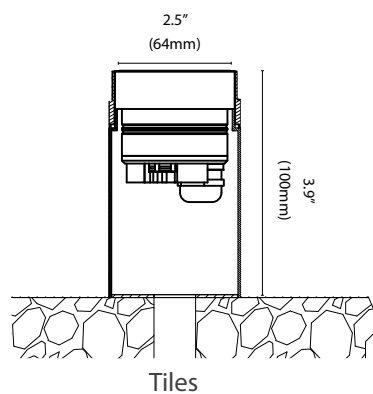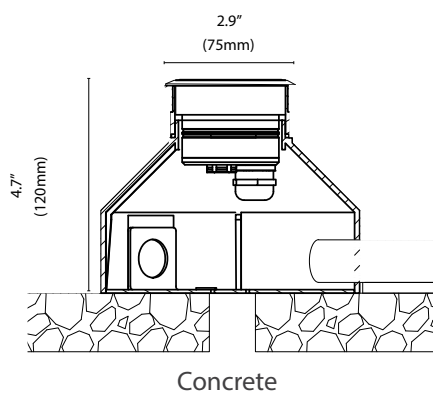

> Installation housing order codes

RD60C - Concrete

RD60T - Tiles

Ordering Information

RDW60				WW	24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDW60	TM TS	H	27	WW	24	C - standard lenght 1' (0.3m)
			30			C3 - 3m (10') cable lenght
			40			C6 - 6m (20') cable lenght
						C9 - 9m (30') cable lenght



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

FILIX



RDT100

Tilt Adjustable



Round LED uplight with high performance optics for outdoor and indoor use, floor and wall installation. ABS housing with flush clear tempered glass lens and stainless steel for trim and trimless integration into grade. Recessed low glare led source with AGS - Anti Glare System with tilt adjustable mechanism.



FILIX

RDT100 Tilt Adjustable 20°

> Electrical

24 VDC fixture voltage
H - 10W - 820 lm

> Technical

IP67	Clear tempered
CLASS III	glass 5/8" (15mm)
IK09	Stainless steel (304) ring
UL STD 1598	ABS body and
Drive over	stainless steel body
rated 1500 KG	ABS installation
(3000lb)	housing

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: 85

> Optics





SP Spot 14°



FL Flood 31°

> Installation

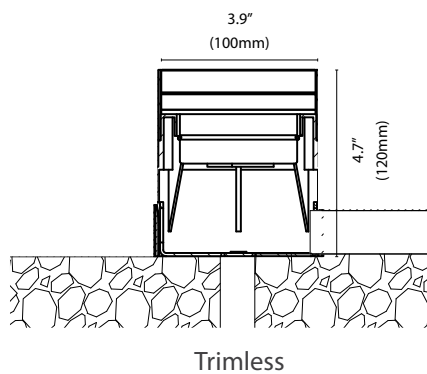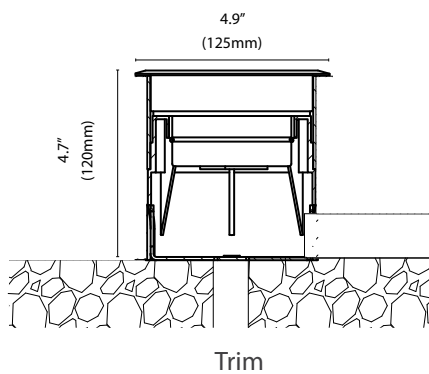

> Installation housing order codes

RD100C - Trim
RD100T - Trimless

Ordering Information¹

RDT100		H		GR	24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDT100	TM TS	H	27 30 40	SP FL	24	C - standard lenght 1' (0.3m) C3 - 3m (10') cable lenght C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght



103233 - OT60 24V P
103196 - OT130 24V P
103234 - OT250 24V P

102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103502 - OT 210/220-240 /1-4CH - DALI
103507 - OT250/220...240/ 24V DIM P (1-10V)



RDD100 Deco



Round LED uplight with high performance optics for outdoor and indoor use, floor and wall installation.

ABS housing with flush clear tempered glass lens and stainless steel ring for trim and trimless integration.

Recessed low glare LED source with AGS - Anti Glare System Drive over rated.



FILIX

RDD100 Deco

> Electrical

24 VDC fixture voltage
H - 10W - 690 lm

> Technical

IP67	Clear tempered
CLASS III	glass 5/8" (15mm)
IK09	Stainless steel (304) ring
UL STD 1598	ABS body and
Drive over	stainless steel body
rated 1500 KG	ABS installation
(3000lb)	housing

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



SP Spot 17°





FL Flood 31°



GR Graze 17°x36°

> Installation

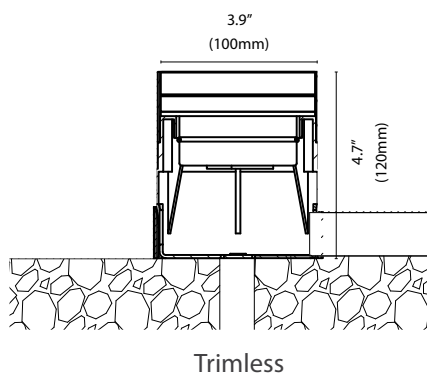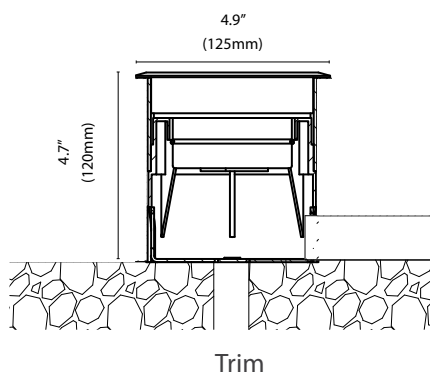

> Installation housing order codes

RD100C - Trim
RD100T - Trimless


Ordering Information

RDD100		H	24			
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDD100	TM	H	27	SP	24	C - standard lenght 1' (0.3m)
	TS		30	FL		C3 - 3m (10') cable lenght
			40	GR		C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

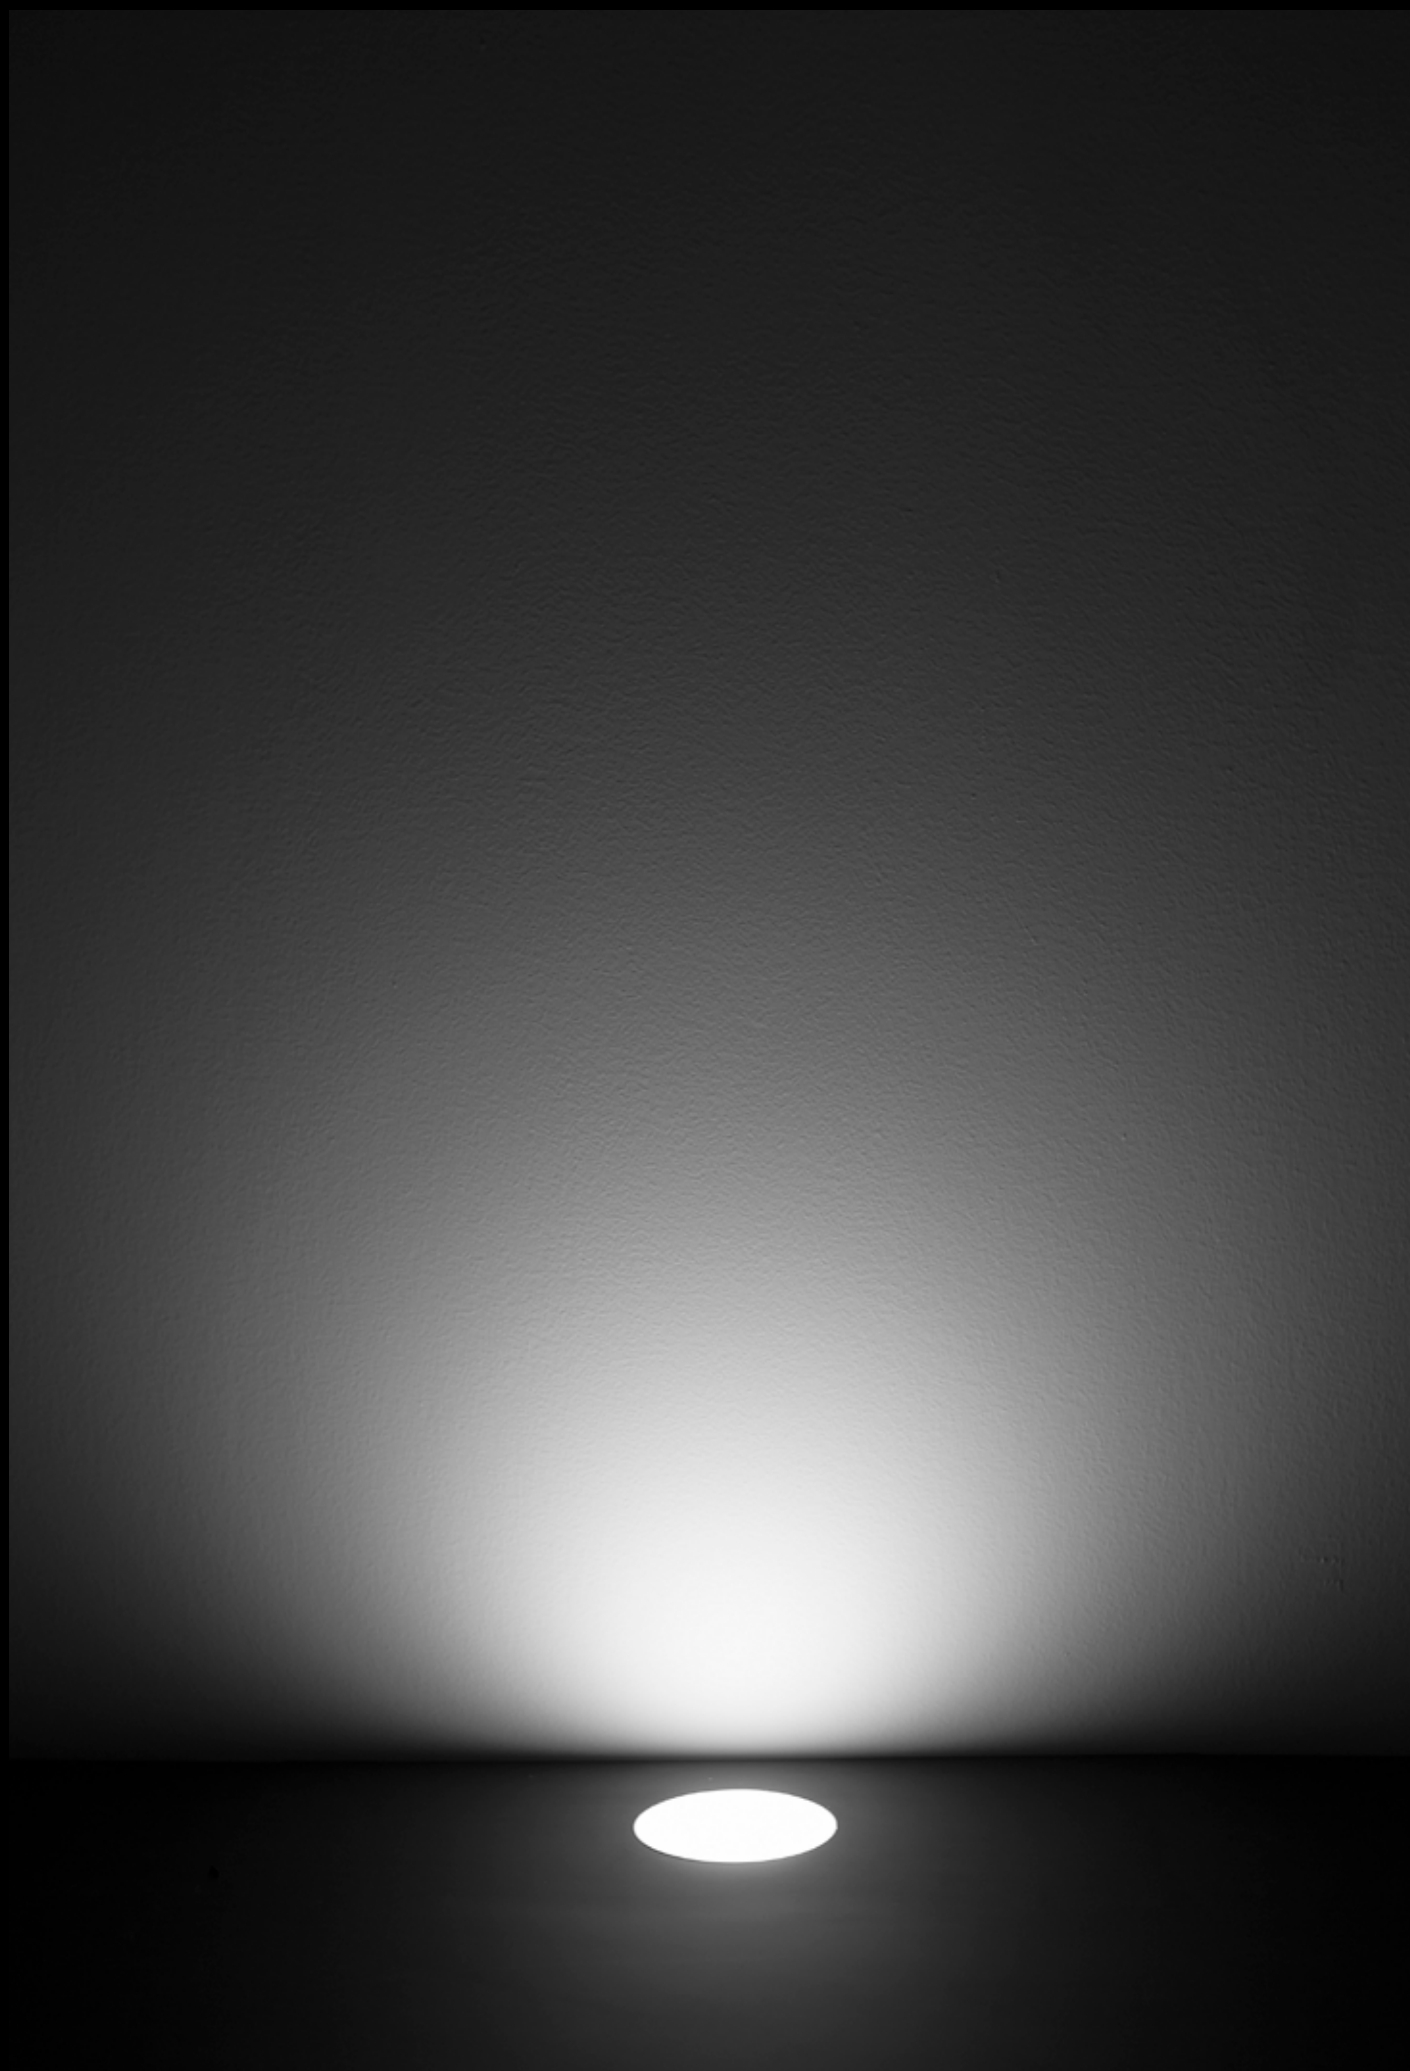

RDP100 Paver



Round LED marker
light for outdoor and
indoor use.

ABS housing with
trim and trimless
satin tempered glass
trim for trimless
integration into floor
surface.

Drive over rated.



RDP100

Paver

> Electrical

24 VDC fixture voltage

L - 2.9W - 65 lm

H - 4.8W - 115 lm

H - 4.8W - RGBW

> Technical

IP67	Sandblasted
CLASS III	tempered glass
IK09	5/8" (15mm)
UL STD 1598	Stainless steel (304) ring
Drive over	ABS body and
rated 1500 KG	stainless steel body
(3000lb)	ABS installation
	housing

> Color



27 - 2700K
30 - 3000K
40 - 4000K
RGBW
2 Step MacAdam
CRI: > 85

> Optics



LL even
illumination

> Installation

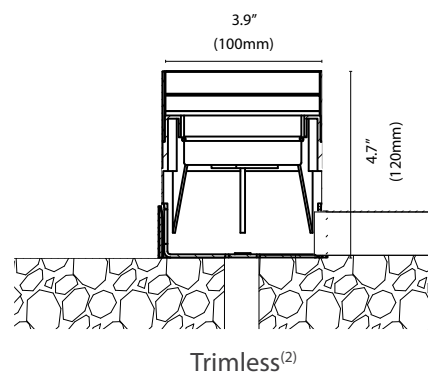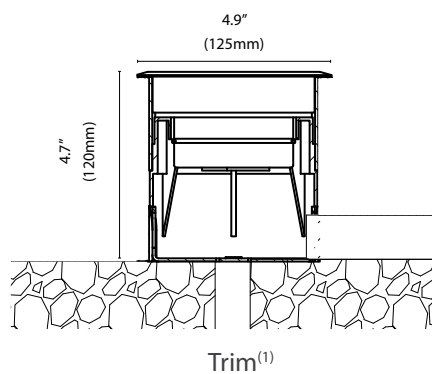

> Installation housing order codes

RD100C - Trim
RD100T - Trimless


Ordering Information

RDP100					24	
Model	Installation	Power ⁽³⁾	Color Temp.	Optics ⁽⁴⁾	Voltage	Options
RDP100	TM TS	L	27 30 40	LL	24	C - standard lenght 1' (0.3m) C3 - 3m (10') cable lenght C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght
		H	27 30 40 RGBW			



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

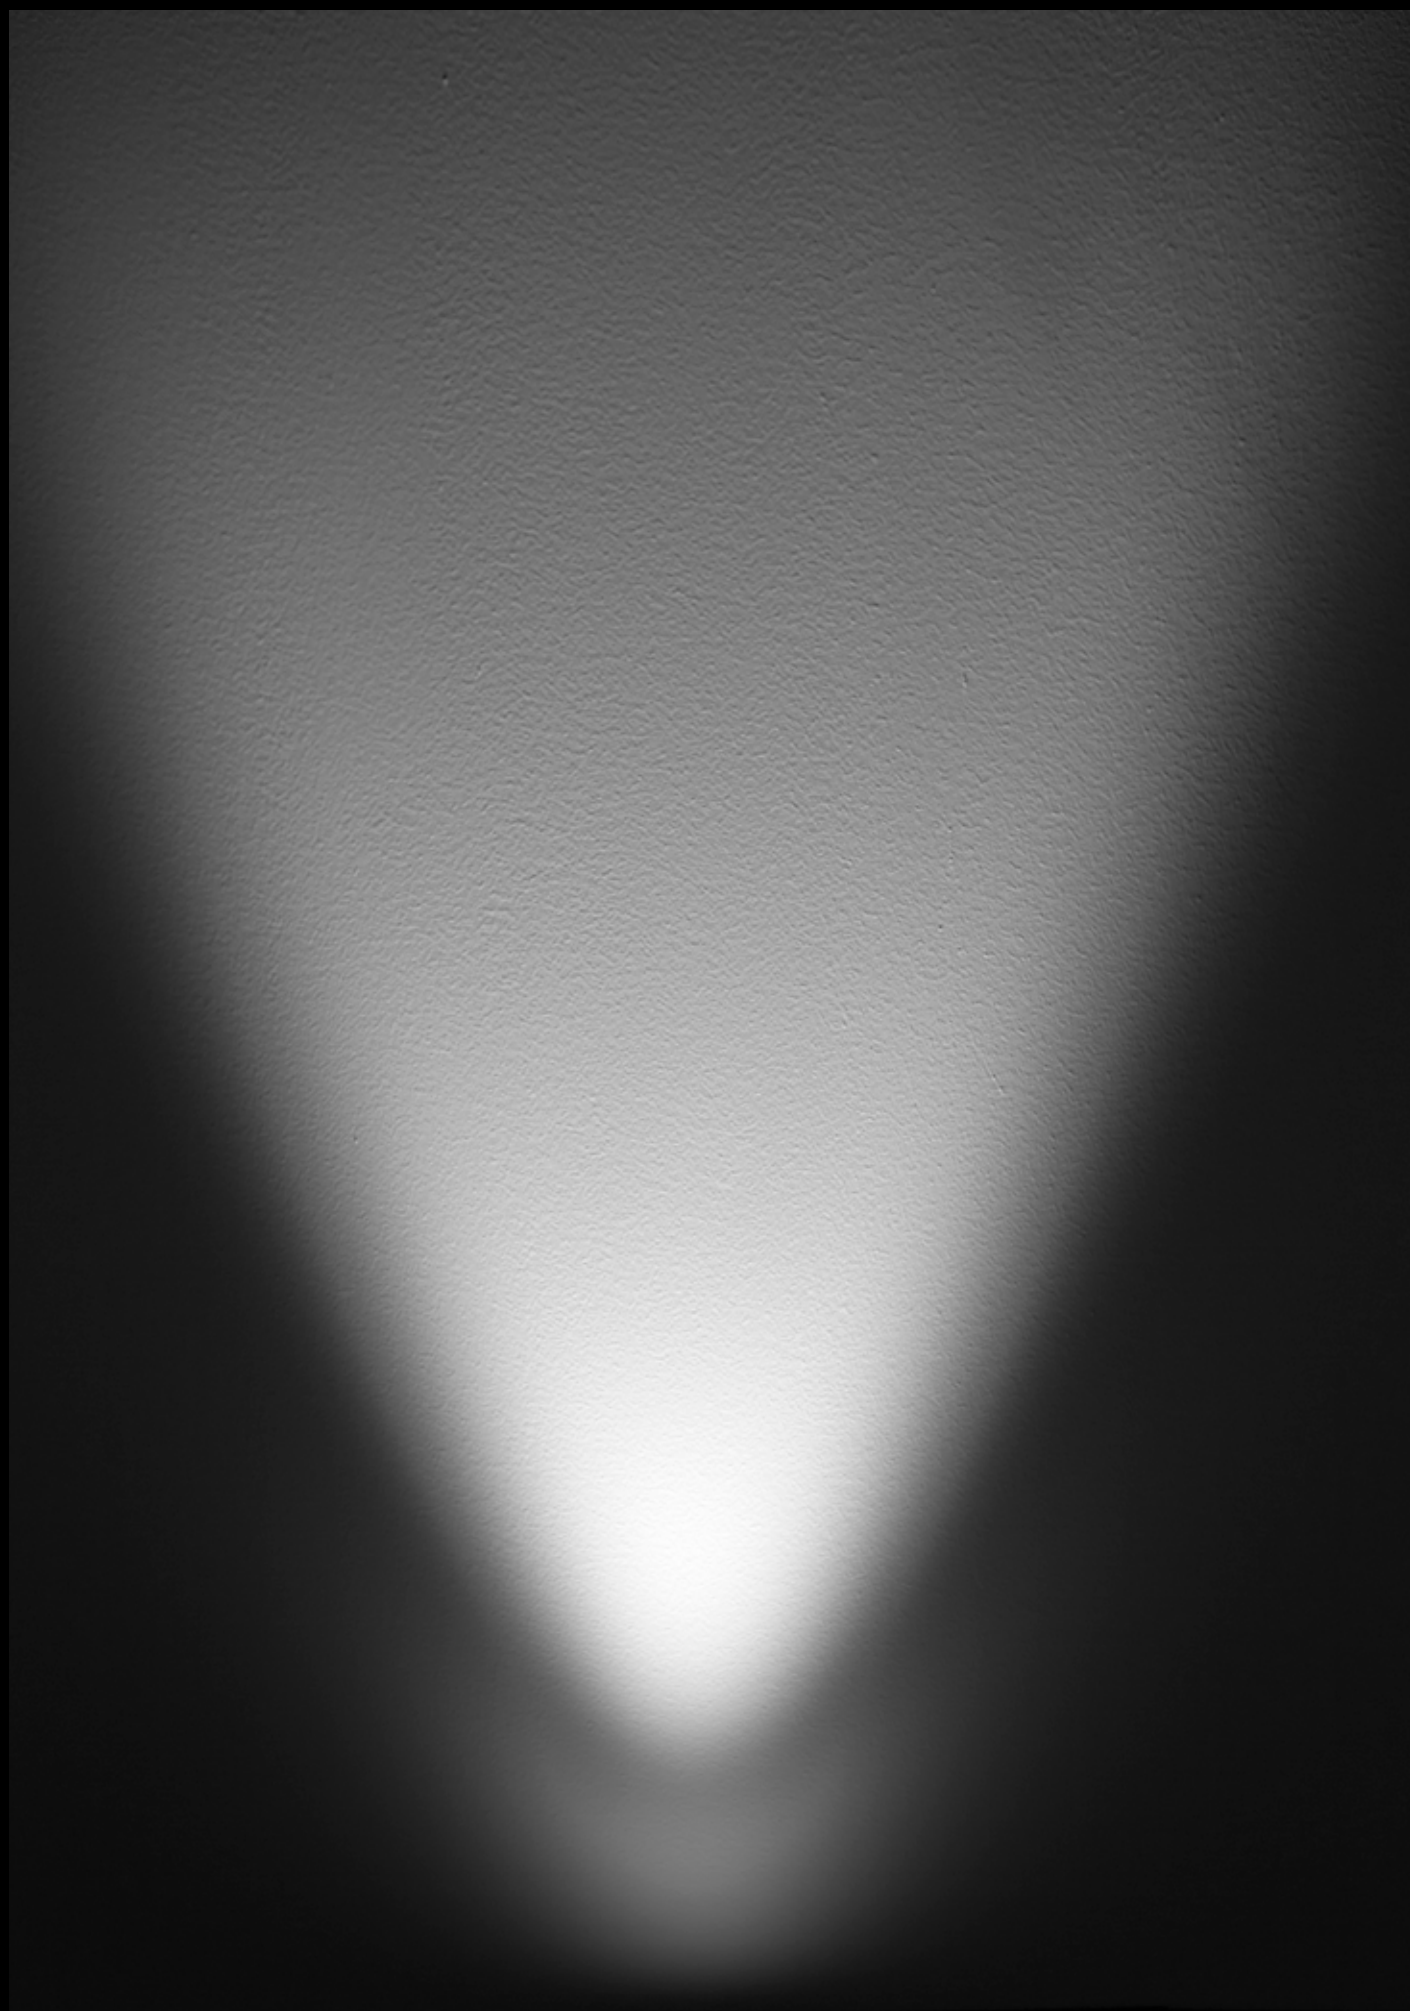

RDW100 WallWash



Round LED wallwash
uplight with high
performance optics for
outdoor and indoor use.
ABS housing with flush
clear tempered glass
lens for trim and trimless
integration into floor
surface.

Drive over rated.



RDW100 WallWash

> Electrical

24 Vdc fixture voltage
H - 10W - 290 lm

> Technical

IP67	Clear tempered
CLASS III	glass 5/8" (15mm)
IK09	Stainless steel (304) ring
UL STD 1598	ABS body and
Drive over	stainless steel body
rated 1500 KG	ABS installation
(3000lb)	housing

> Color



27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



WW WallWash
32"x47"
tilt 13°

> Installation

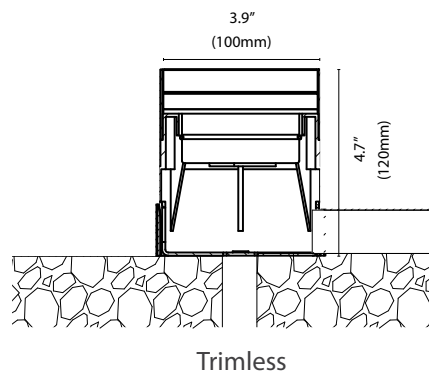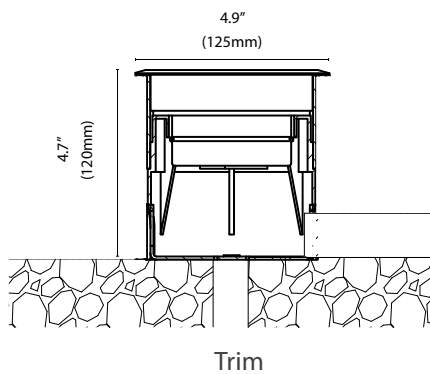

> Installation housing order codes

RD100C - Trim
RD100T - Trimless

Ordering Information

RDW100					24	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDW100	TM TS	H	27 30 40	LL	24	C* - standard lenght 1'(0.3m) C3 - 3m (10') cable lenght C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght




Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)



RDD140 Deco

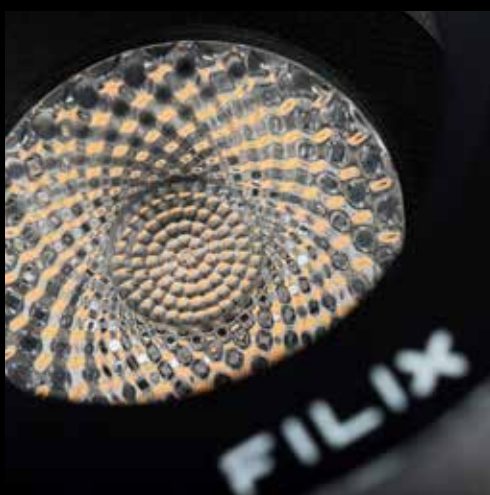

Round LED high power uplight with integrated gear and high performance optics. Deeply regressed led source for reduce glare effect. Body in SS316L for



RDD140 Deco

> Electrical

24 VDC fixture voltage
 230 V fixture voltage (on/off)
 230D - 230V fixture voltage / Dali
 230V - 230V fixture voltage / 1-10V
 L - 13W - 1100 lm

> Technical

IP67	Clear tempered
IK09	glass 5/8" (15mm)
UL STD 1598	Stainless steel ring
Drive over	Body SS316
rated 1500 KG	Power supply inside
(3000lb)	ABS installation
	housing

> Color

27 - 2700K
 30 - 3000K
 40 - 4000K
 TW - 1800K-4000K
 2 Step MacAdam
 CRI: > 85

> Optics



SP Spot 17°




FL Flood 30°



W Wide 50°

> Installation

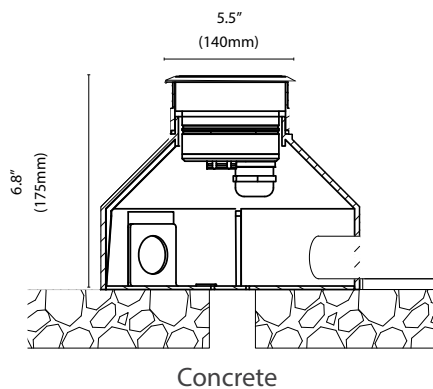


> Installation housing order codes

RD130C - Concrete

Ordering Information						
RDD140				24		
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
RDD140	TM	L	27	SP	24	C - standard lenght 1' (0.3m)
			30	FL	230	
			40	W	230D	
			TW		230V	




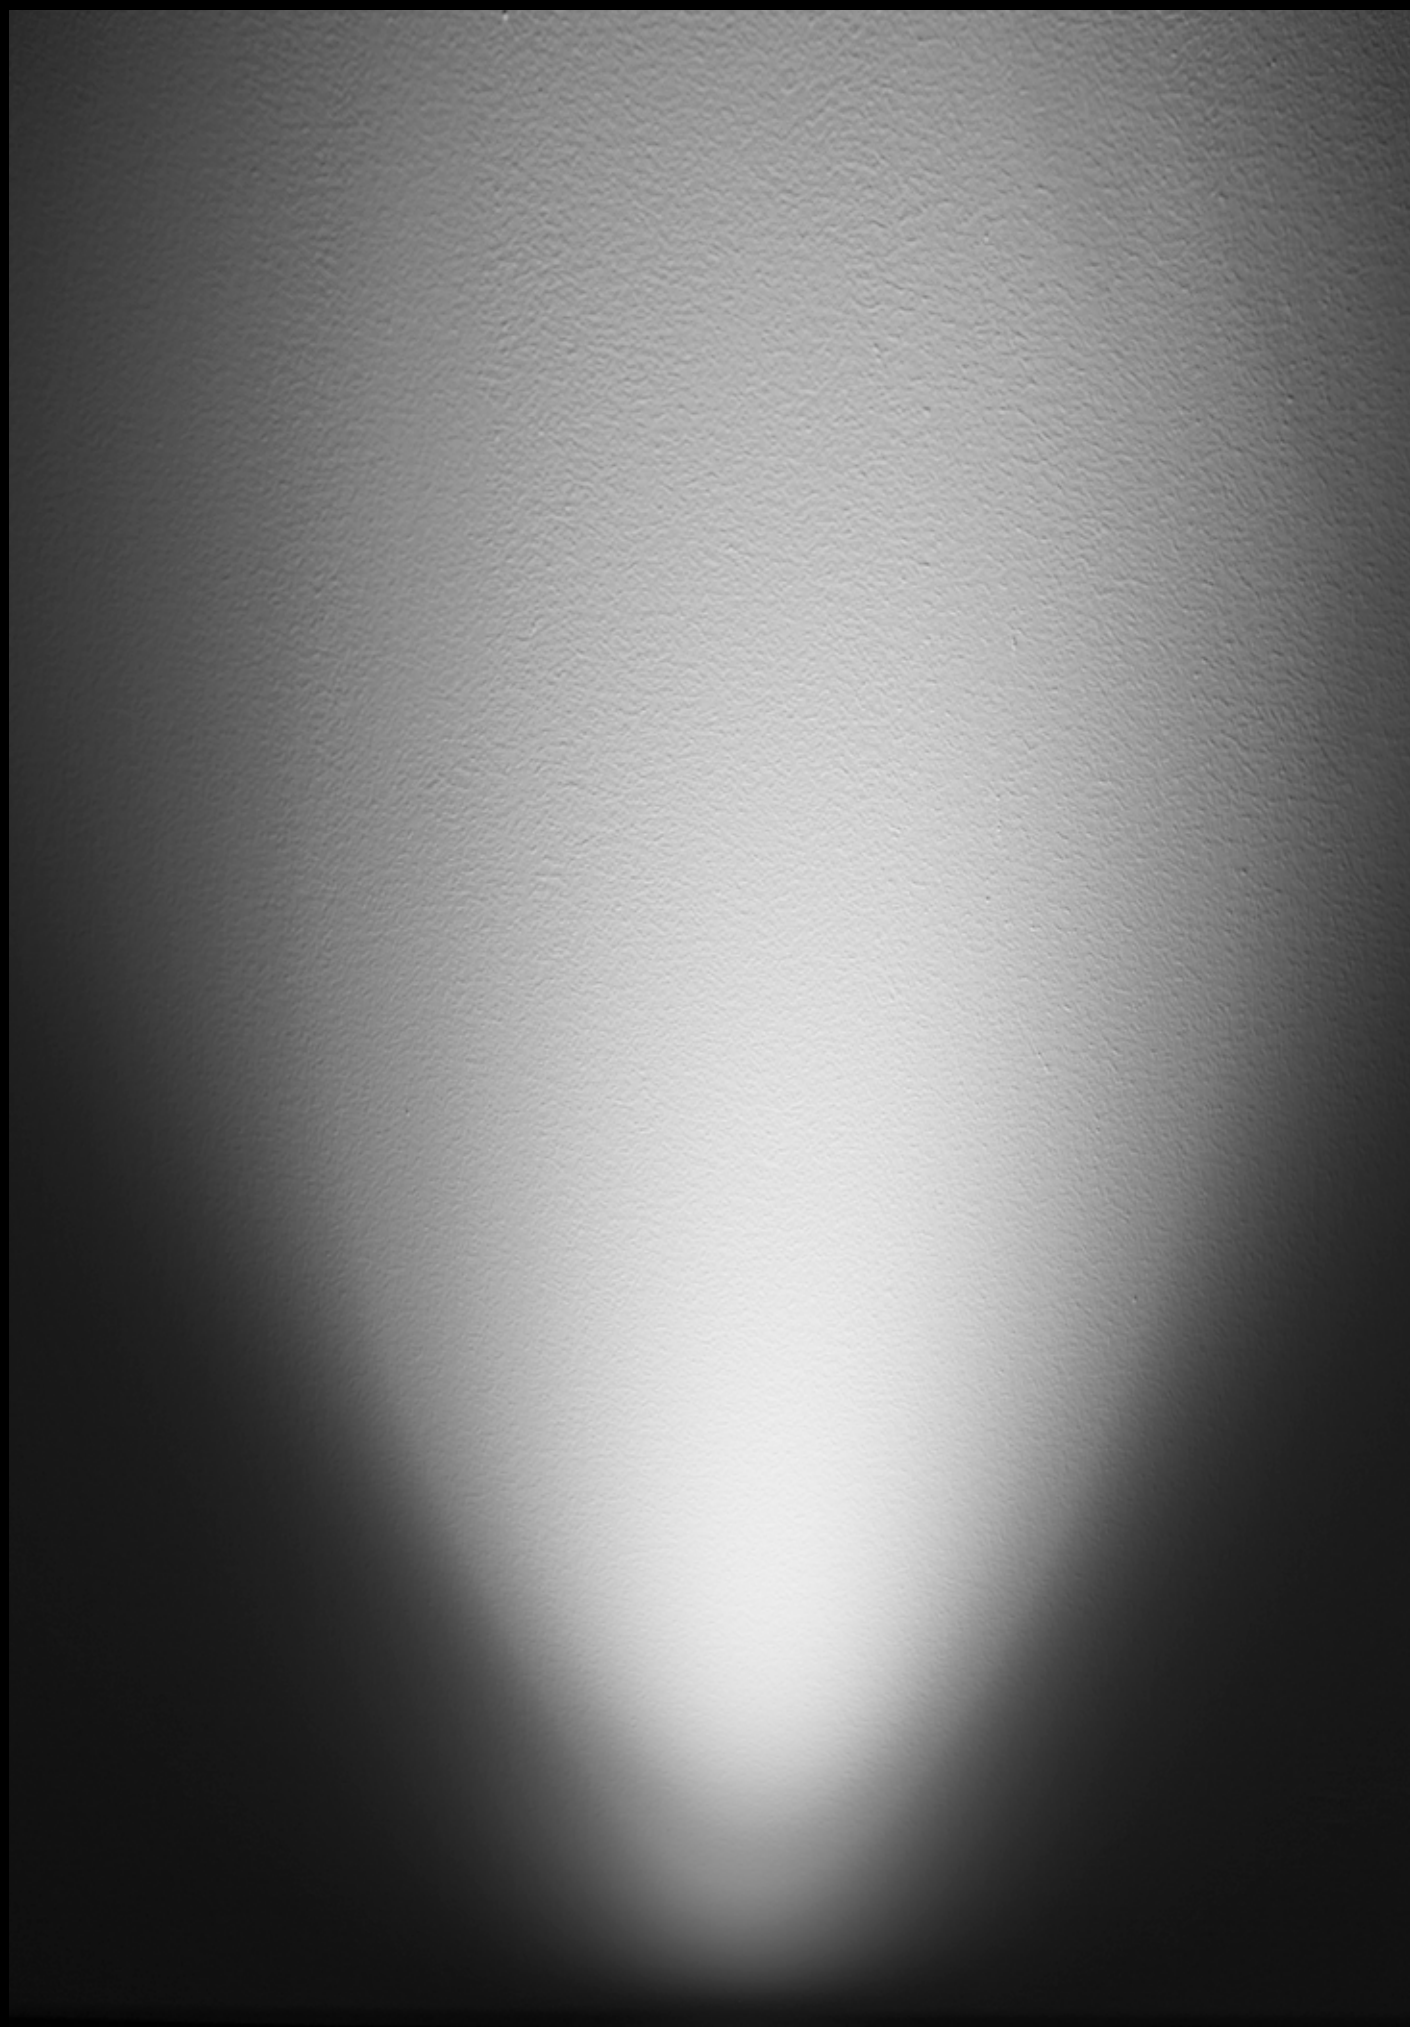

SQD100 Deco



Square LED up light with high performance optics for outdoor and indoor use. Stainless steel housing with flush clear tempered glass lens for trim and trimless integration into floor surface. Drive over rated.

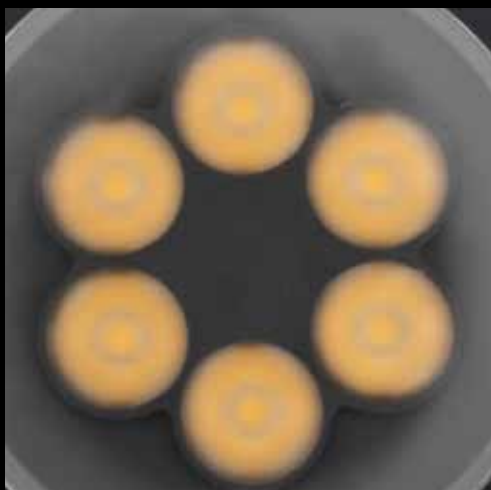

SQD100 Deco

> Electrical

24 VDC fixture voltage
H - 10W - 670 lm

> Technical

IP67	Clear tempered
CLASS III	glass 5/8" (15mm)
IK09	Stainless steel (304) ring
UL STD 1598	ABS body and
Drive over	stainless steel body
rated 1500 KG	ABS installation
(3000lb)	housing

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



SP Spot 17°





FL Flood 31°



GR Graze 17°x36°

> Installation

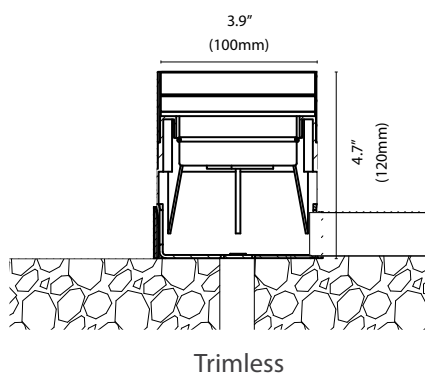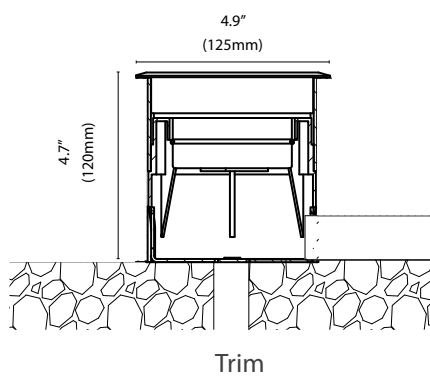

> Installation housing order codes

SQ100C - Trim
SQ100T - Trimless


Ordering Information

SQD100		H			24	
Model	Installation	Power	Color Temp.	Optics ⁽⁴⁾	Voltage	Options
SQD100	TM TS	H	27 30 40	SP FL GR	24	C - standard length 1' (0.3m) C3 - 3m (10') cable length C6 - 6m (20') cable length C9 - 9m (30') cable length



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

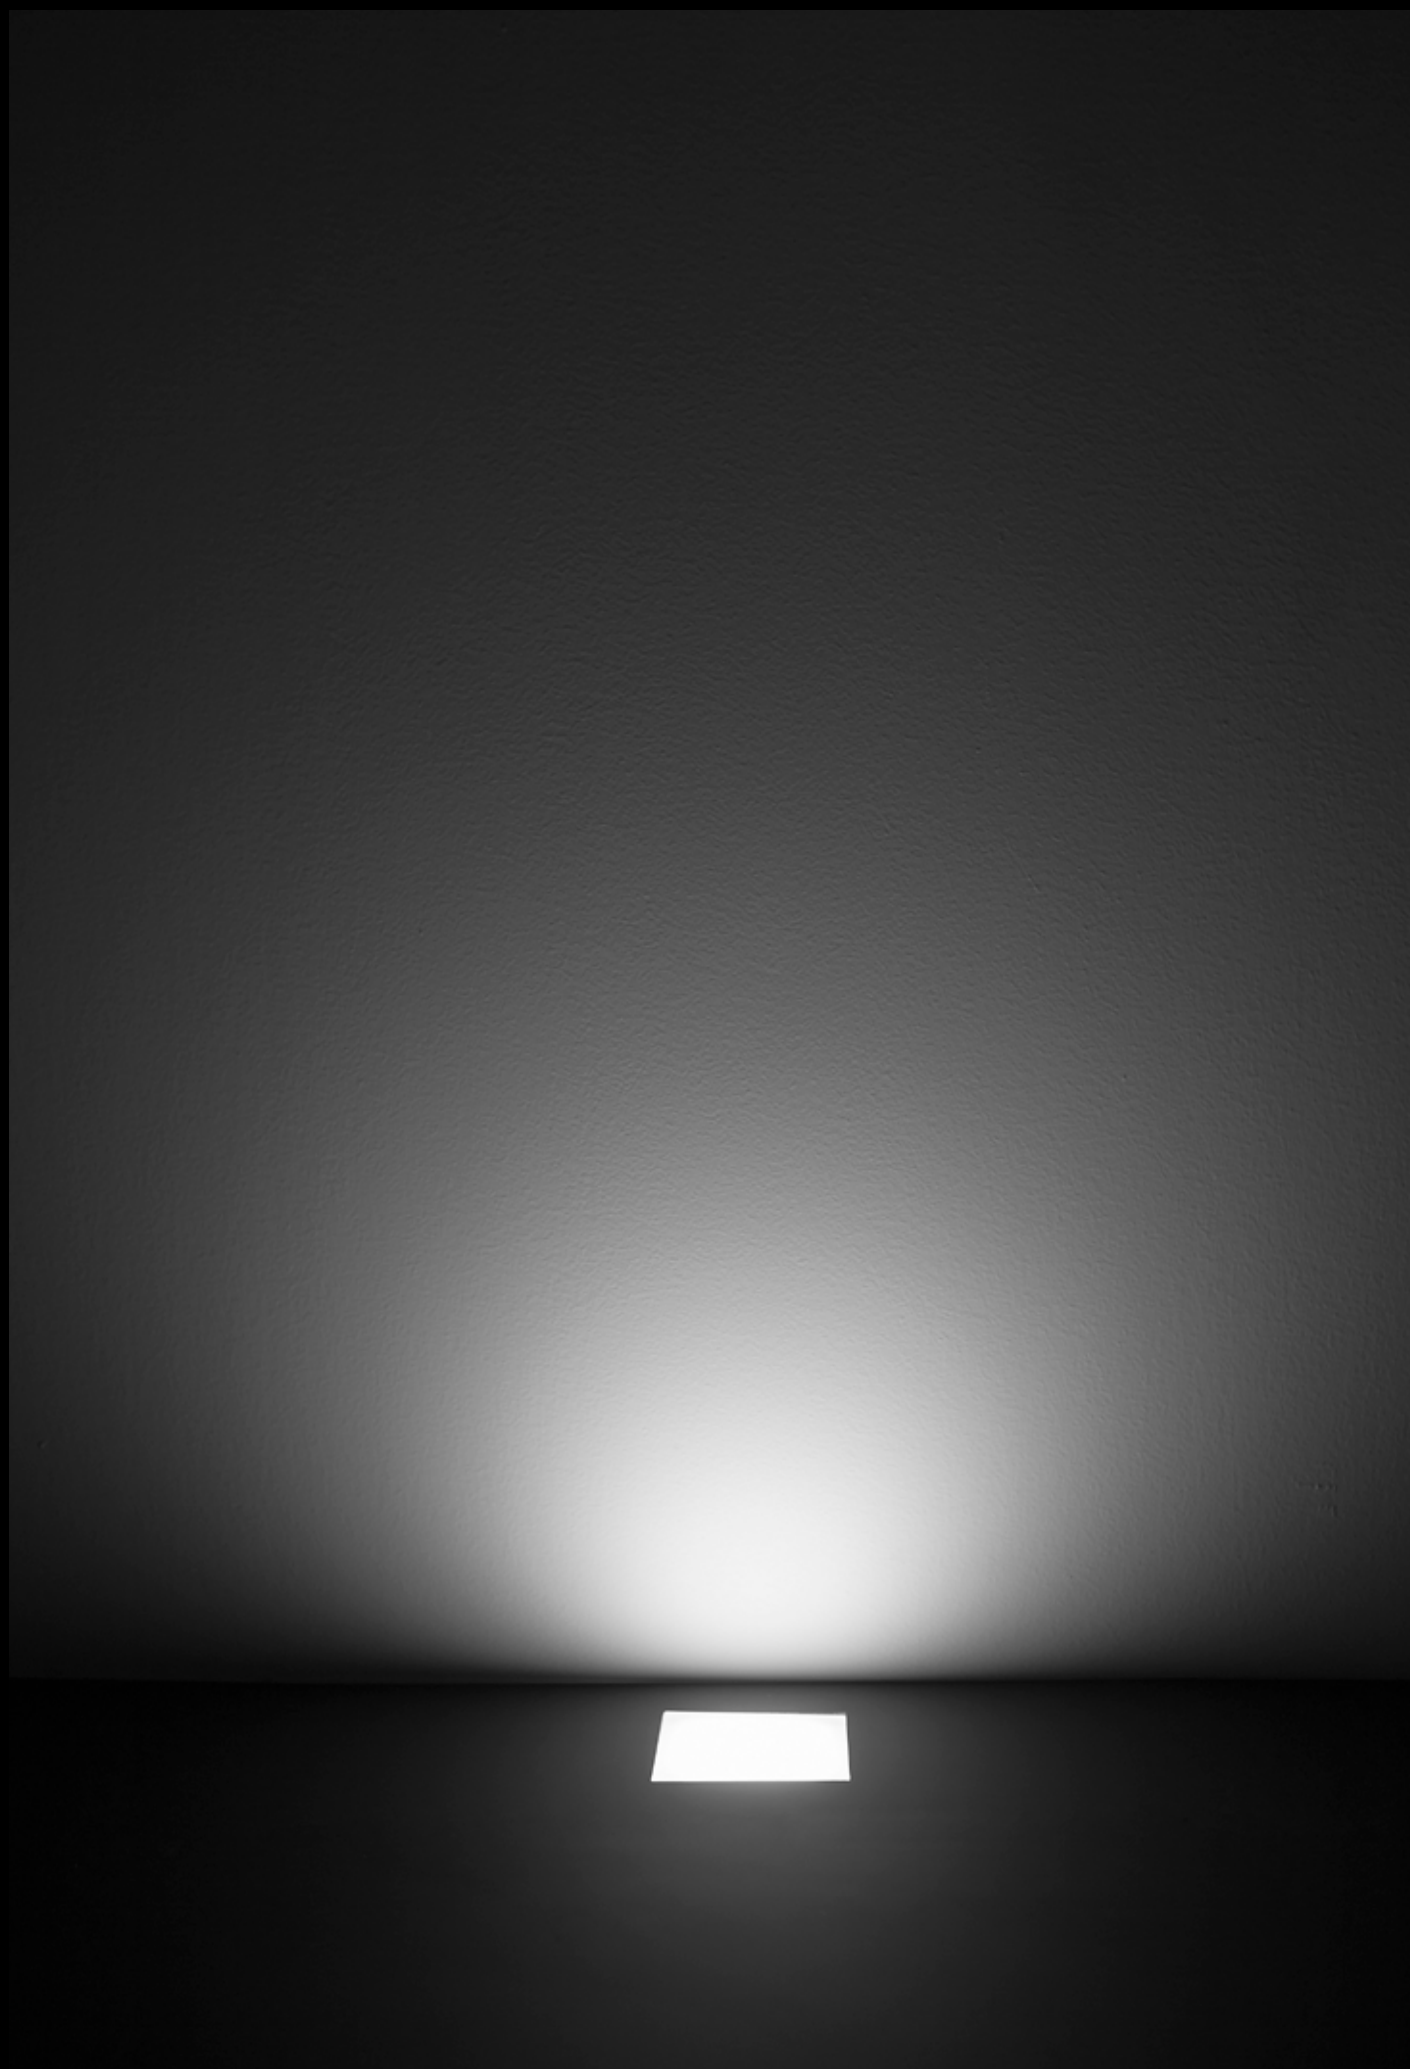

SQP100 Paver



Square LED marker light
for outdoor and indoor use.
Stainless steel housing
with flush satin tempered
glass lens for trim and
trimless integration into
floor surface.
Drive over rated.



FILIX

SQP100 Paver

> Electrical

24 VDC fixture voltage

L - 2.9W - 65 lm

H - 4.8W - 115 lm

H - 4.8W - RGBW

> Technical

IP67	Sandblasted
CLASS III	tempered glass
IK09	5/8" (15mm)
UL STD 1598	Stainless steel (304) ring
Drive over	ABS body and
rated 1500 KG	stainless steel body
(3000lb)	ABS installation
	housing

> Color



27 - 2700K
30 - 3000K
40 - 4000K
RGBW
2 Step MacAdam
CRI: > 85

> Optics



LL even
illumination

> Installation

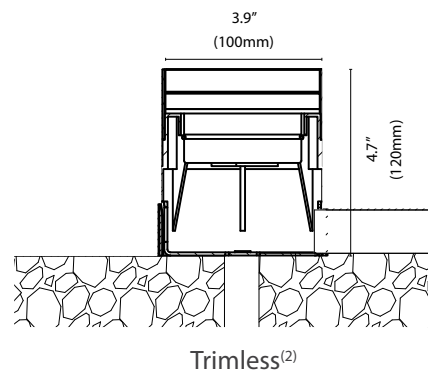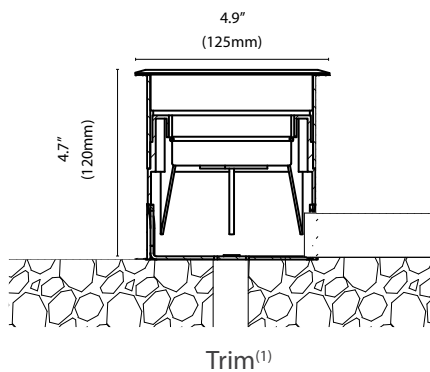

> Installation housing order codes

SQ100C - Trim
SQ100T - Trmless

Ordering Information

SQP100				24		
Model	Installation	Power ¹	Color Temp.	Optics	Voltage	Options
SQP100	TM TS	L	27 30 40	LL	24	C - standard cable length 1' (0.3m) C3 - 3m (10') cable length C6 - 6m (20') cable length C9 - 9m (30') cable length
		H	27 30 40 RGBW			



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)



SQW100 WallWash



Square LED wallwash uplight with high performance optics for outdoor and indoor use. ABS housing with flush clear tempered glass lens for trim and trimless integration into floor surface.

Drive over rated.



SQW100 WallWash

> Electrical

24 VDC fixture voltage
H - 10W - 290 lm

> Technical

IP67	Clear tempered
CLASS III	glass 5/8" (15mm)
IK09	Stainless steel (304) ring
UL STD 1598	ABS body and
Drive over	stainless steel body
rated 1500 KG	ABS installation
(3000lb)	housing

> Color



27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



WW WallWash
32°x47° tilt 14°

> Installation

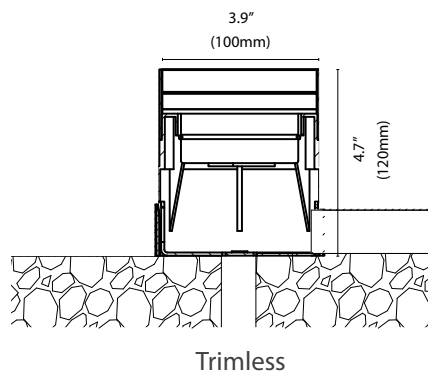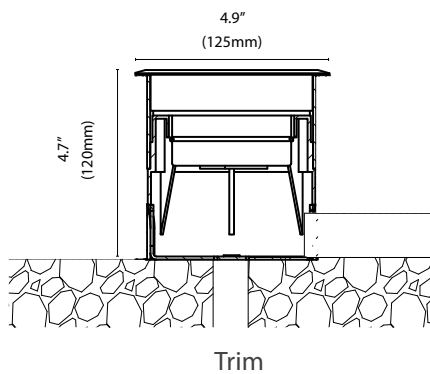

> Installation housing order codes

SQ100C - Trim

SQ100T - Trimless

Ordering Information

SQW100					24	
Model	Installation	Power ¹	Color Temp.	Optics	Voltage	Options
SQW100	TM	H	27	LL	24	C - standard lenght 1' (0.3m)
	TS		30			C3 - 3m (10') cable lenght
			40			C6 - 6m (20') cable lenght
						C9 - 9m (30') cable lenght



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)



Zero G



Linear Inground wall grazer. Slim and elegant in size 45mm width. Incorporates linear molded optics to maximize output as well as allow linear illumination. Linear molded optics reflect a very clean light taking the dot's visibility away allowing the light to be linear. At the same time the optic removes single chip discoloration option setting the light to be uniform in color and output. Above the optics, a special glare control tool is being implemented to control the glare completely on both x and y-axis.



Zero G

> Electrical

24 VDC fixture voltage
H - 39W/m - 1015 lm

> Technical

IP67	IN/OUT cable feed
CLASS III	Clear tempered glass
IK09	3/8" (10mm)
US STD 1598	Stainless steel 304
Drive over	construction
rated 1500kg	
(3000lb)	
Zero Glare	

> Color


27 - 2700K
30 - 3000K
40 - 4000K
TW - 2200-6000K
2 Step MacAdam
CRI: 85

> Optics



GR Graze 10x50°

> Installation

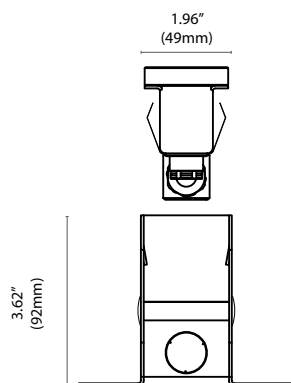

> Installation Housing codes

ZG174 - 174mm
 ZG324 - 324mm
 ZG624 - 624mm
 ZG1224 - 1224mm

Ordering Information¹

ZG				GR	24	C
Model	Lenght	Power ⁽²⁾	Color Temp.	Optics	Voltage	Options
ZG	174 324 624 1224	H	27 30 40 TW	GR	24	C - standard lenght 1'(0.3m)



Power Supply

On/Off

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power Supply integrated controls

102345 - ELDOLED Linear 100S (DXM,DALI+PS)

103502 - OT 210/220-240 /1-4CH - DALI

103507 - OT250/220...240/ 24V DIM P (1-10V)



Eter



Linear Wallwash luminaire designed for recessed installation for exterior or interior applications.

High output, even vertical illumination while eliminating glare and maintaining an even line of light. Drive over rated.

Eter

> Electrical

24 VDC fixture voltage
H - 23W/m - 845 lm

> Technical

IP67	Clear tempered glass
CLASS III	3/8" (10mm) wallwash
IK09	effect, continuous run of
US STD 1598	standard lengths
Drive over	Stainless steel 304
rated 1500kg	construction
(3000lb)	

> Color


27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: > 85

> Optics



WW Wall Wash

> Installation

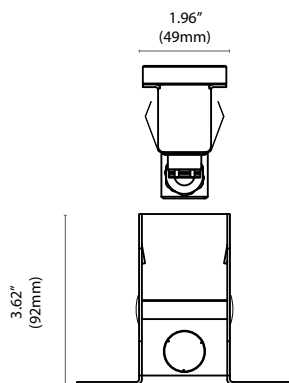

> Installation housing order codes

ET174 - 174mm
 ET324 - 324mm
 ET624 - 624mm
 ET1224 - 1224mm


Ordering Information

ET				WW	24	
Model	Length	Power	Color Temp.	Optics	Voltage	Options
ET	174 324 624 1224	H	27 30 40	WW	24	C - standard cable length 3.3' (1m) C3 - 3m (10') cable length C6 - 6m (20') cable length C9 - 9m (30') cable length



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

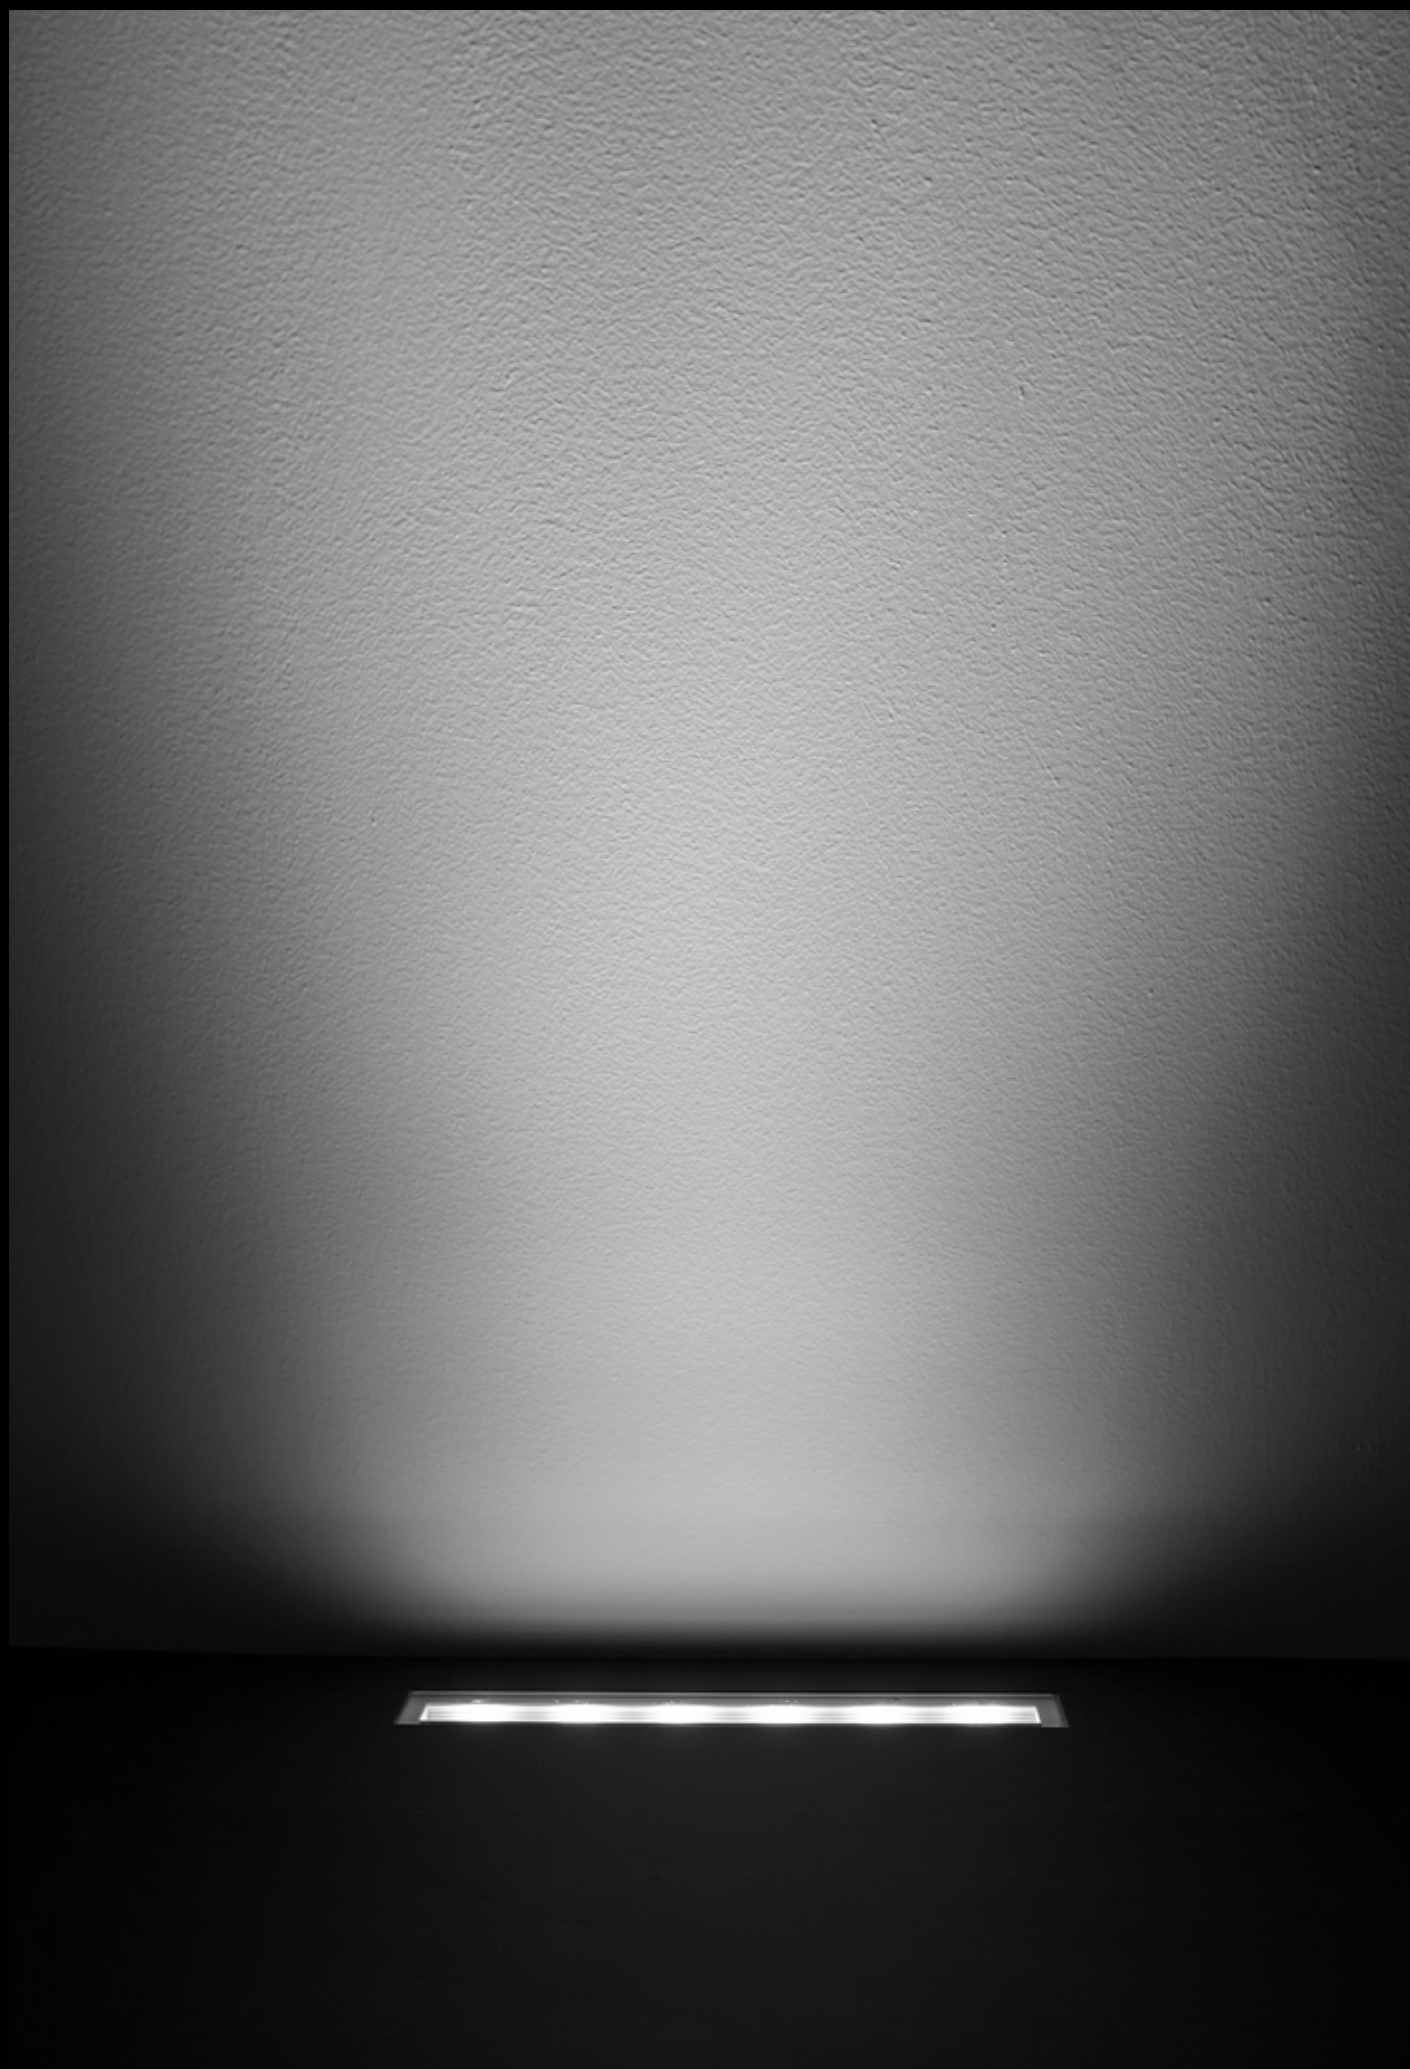

StepUp Deco



Linear light with high performance optics for outdoor and indoor use.
Stainless steel housing with flush tempered glass lens for trimless integration into floor surface.
Drive over rated.





StepUp Deco

> Electrical

24 VDC fixture voltage
H - 39W/m - 3560 lm
H - 39W/m - RGBW

> Technical

IP67	Clear tempered glass
CLASS III	3/8" (10mm)
IK09	Stainless steel 304
US STD 1598	construction
Drive over	
rated 1500kg	
(3000lb)	

> Color

27 - 2700K
30 - 3000K
40 - 4000K
RGBW
2 Step MacAdam
CRI: > 85

> Optics



SP Spot 13°




FL Flood 31°



GR Graze 14°x 40°

> Installation

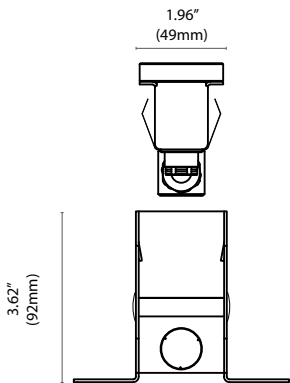

> Installation housing order codes

SU305 - 324mm
 SU307 - 624mm
 SU309 - 1224mm

Ordering Information

SD					24		
Model	Length	Power ²	Color Temp.	Optics	Voltage	Options	
SD	324	H	27	SP	24	C- standard cable length 3.3" (1m)	
	624		30	FL		C3 - 3m (10') cable length	
	1224		40	GR		C6 - 6m (20') cable length	
			RGBW			C9 - 9m (30') cable length	



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)



Slim



Continuous linear line of light
for outdoor and indoor use.
Stainless steel housing with flush
glass lens for trimless integration
into floor.
Drive over rated.





StepUp Slim

> Electrical

24 VDC fixture voltage
L - 10W/m - 350 lm
H - 23W/m - 808 lm
H - 32W/m - RGBW

> Technical

IP67	Corner element
CLASS III	Clear glass 2x5/8"
IK09	(15mm) thick, with inner
UL STD 1598	opal film to create even
Drive over	line of light
rated 3000kg	Stainless steel 304
(6000lb)	construction

> Color


27 - 2700K
30 - 3000K
40 - 4000K
RGBW
2 Step MacAdam
CRI: > 85
RGBW

> Optics



LL even
illumination

> Installation

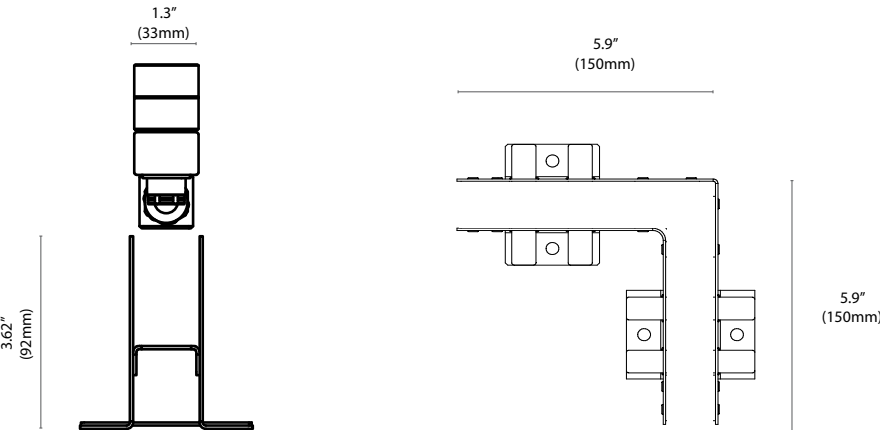

> Installation housing order codes

SL315- 401mm
SL317- 1001mm
SLCO - 151mm x 151mm

Ordering Information						
SL			LL		24	
Model	Length	Power	Color Temp.	Optics	Voltage	Options
SL	400	L	27	LL	24	C- standard cable length 3.3" (1m)
	1000		30			C3 - 3m (10') cable length
	C150		40			C6 - 6m (20') cable length
		H	27			C9 - 9m (30') cable length
			30			
			40			
			RGBW			



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)



Snake



Linear curvable ingrade element for continuous run and flexible radius adjustment. Body in stainless steel with glass finish for trimless integration. Walk over rated.



Snake

> Electrical

24VDC fixture voltage
H - 2.3W - 80lm
H - 2.3W RGB

> Technical

IP67	Sandblasted
CLASS III	temepered glass
IK06	0.62" (16mm) thick
UL STD 1598	Stainless steel 304
Walk over	construction
rated 500kg	ABS housing
(1000lb)	

> Color



27 - 2700K
30 - 3000K
40 - 4000K
RGB
2 Step MacAdam
CRI: > 85

> Optics



LL even
illumination

> Installation

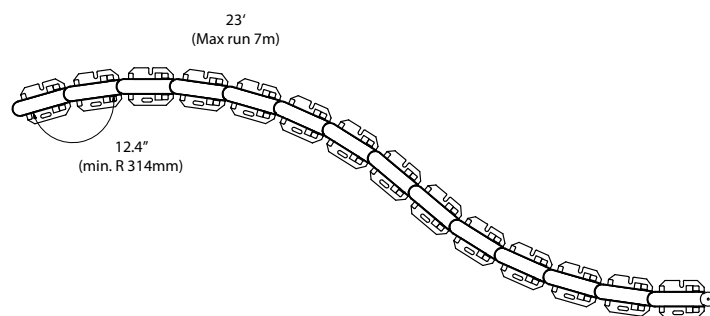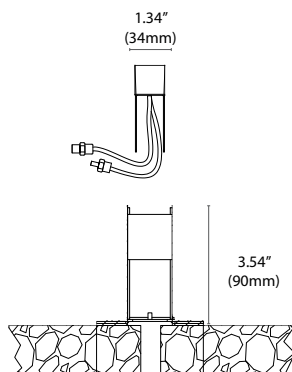

> Installation housing order codes


SN3355

Ordering Information							
SN				24			
Model	Length	Power	Color Temp.	Optics ⁽⁴⁾	Voltage	Options	
						Jumper Cable	Lead Cable
SN	100	H	27 30 40 RGB	LL	24	102796 L=1m	102233 L= 1m



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

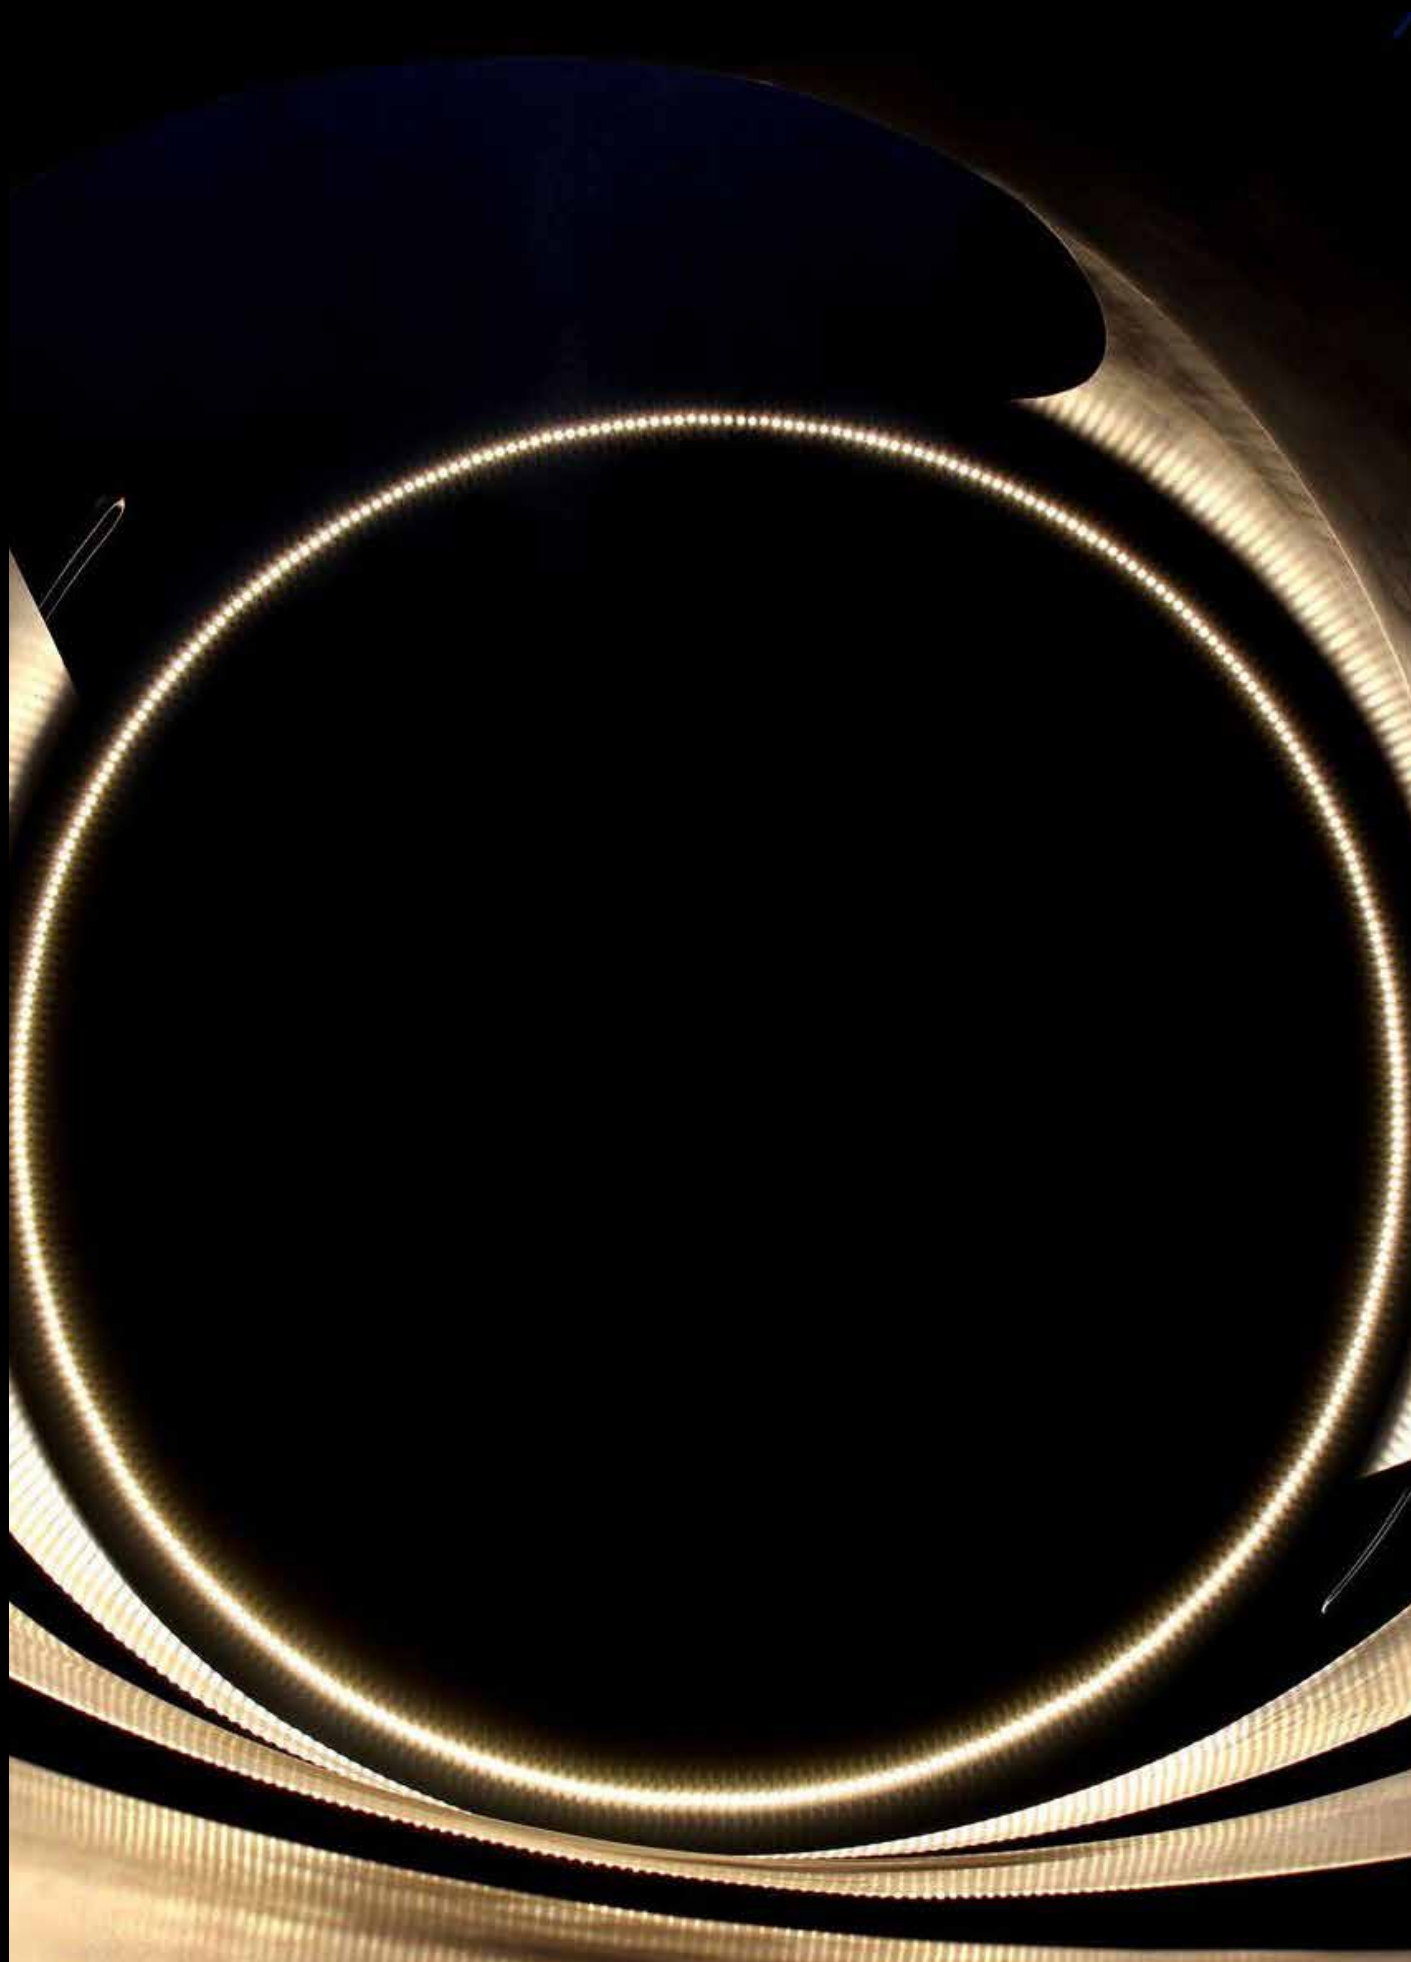

Snake Deco



Linear curvable ingrade element for continuous run and flexible radius adjustment. Body in stainless steel with transparent glass finish for uplight and wall wash effect. Walk over rated.



Snake Deco

> Electrical

24VDC fixture voltage

H - 2.3W - 222 lm

H - 2.3W - RGB

> Technical

IP67

CLASS III

IK06

UL STD 1598

Walk over
rated 500kg
(1000lb)

Clear tempered glass

0.31" (8mm) thick

Stainless steel 304
construction

ABS housing

> Color

27 - 2700K

30 - 3000K

40 - 4000K

RGB

2 Step MacAdam

CRI: > 85

> Optics





SP Spot 17°



FL Flood 31°

> Installation

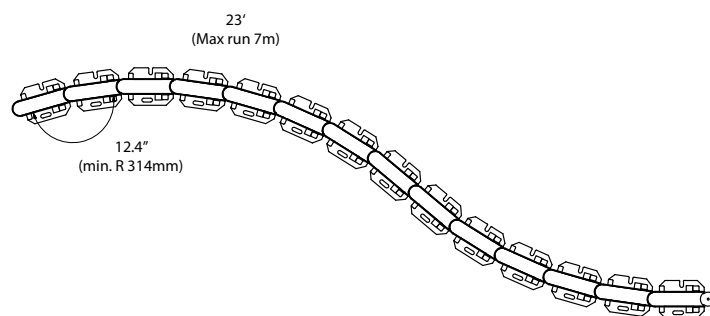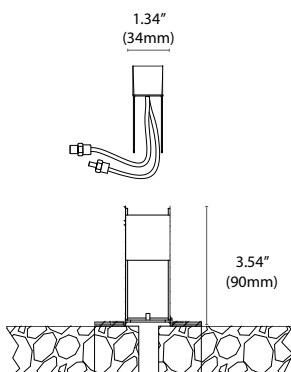

> Installation housing order codes


SN335

Ordering Information							
SND					24		
Model	Length	Power	Color Temp.	Optics	Voltage	Options	
						Jumper Cable	Lead Cable
SND	100	H	27 30 40	SP FL	24	102796 L=1m	102233 L= 1m



Power Supply

On/Off	Power Supply integrated controls
103233 - OT60 24V P	102345 - ELDOLED Linear 100S (DXM,DALI+PS)
103196 - OT130 24V P	103502 - OT 210/220-240 /1-4CH - DALI
103234 - OT250 24V P	103507 - OT250/220...240/ 24V DIM P (1-10V)

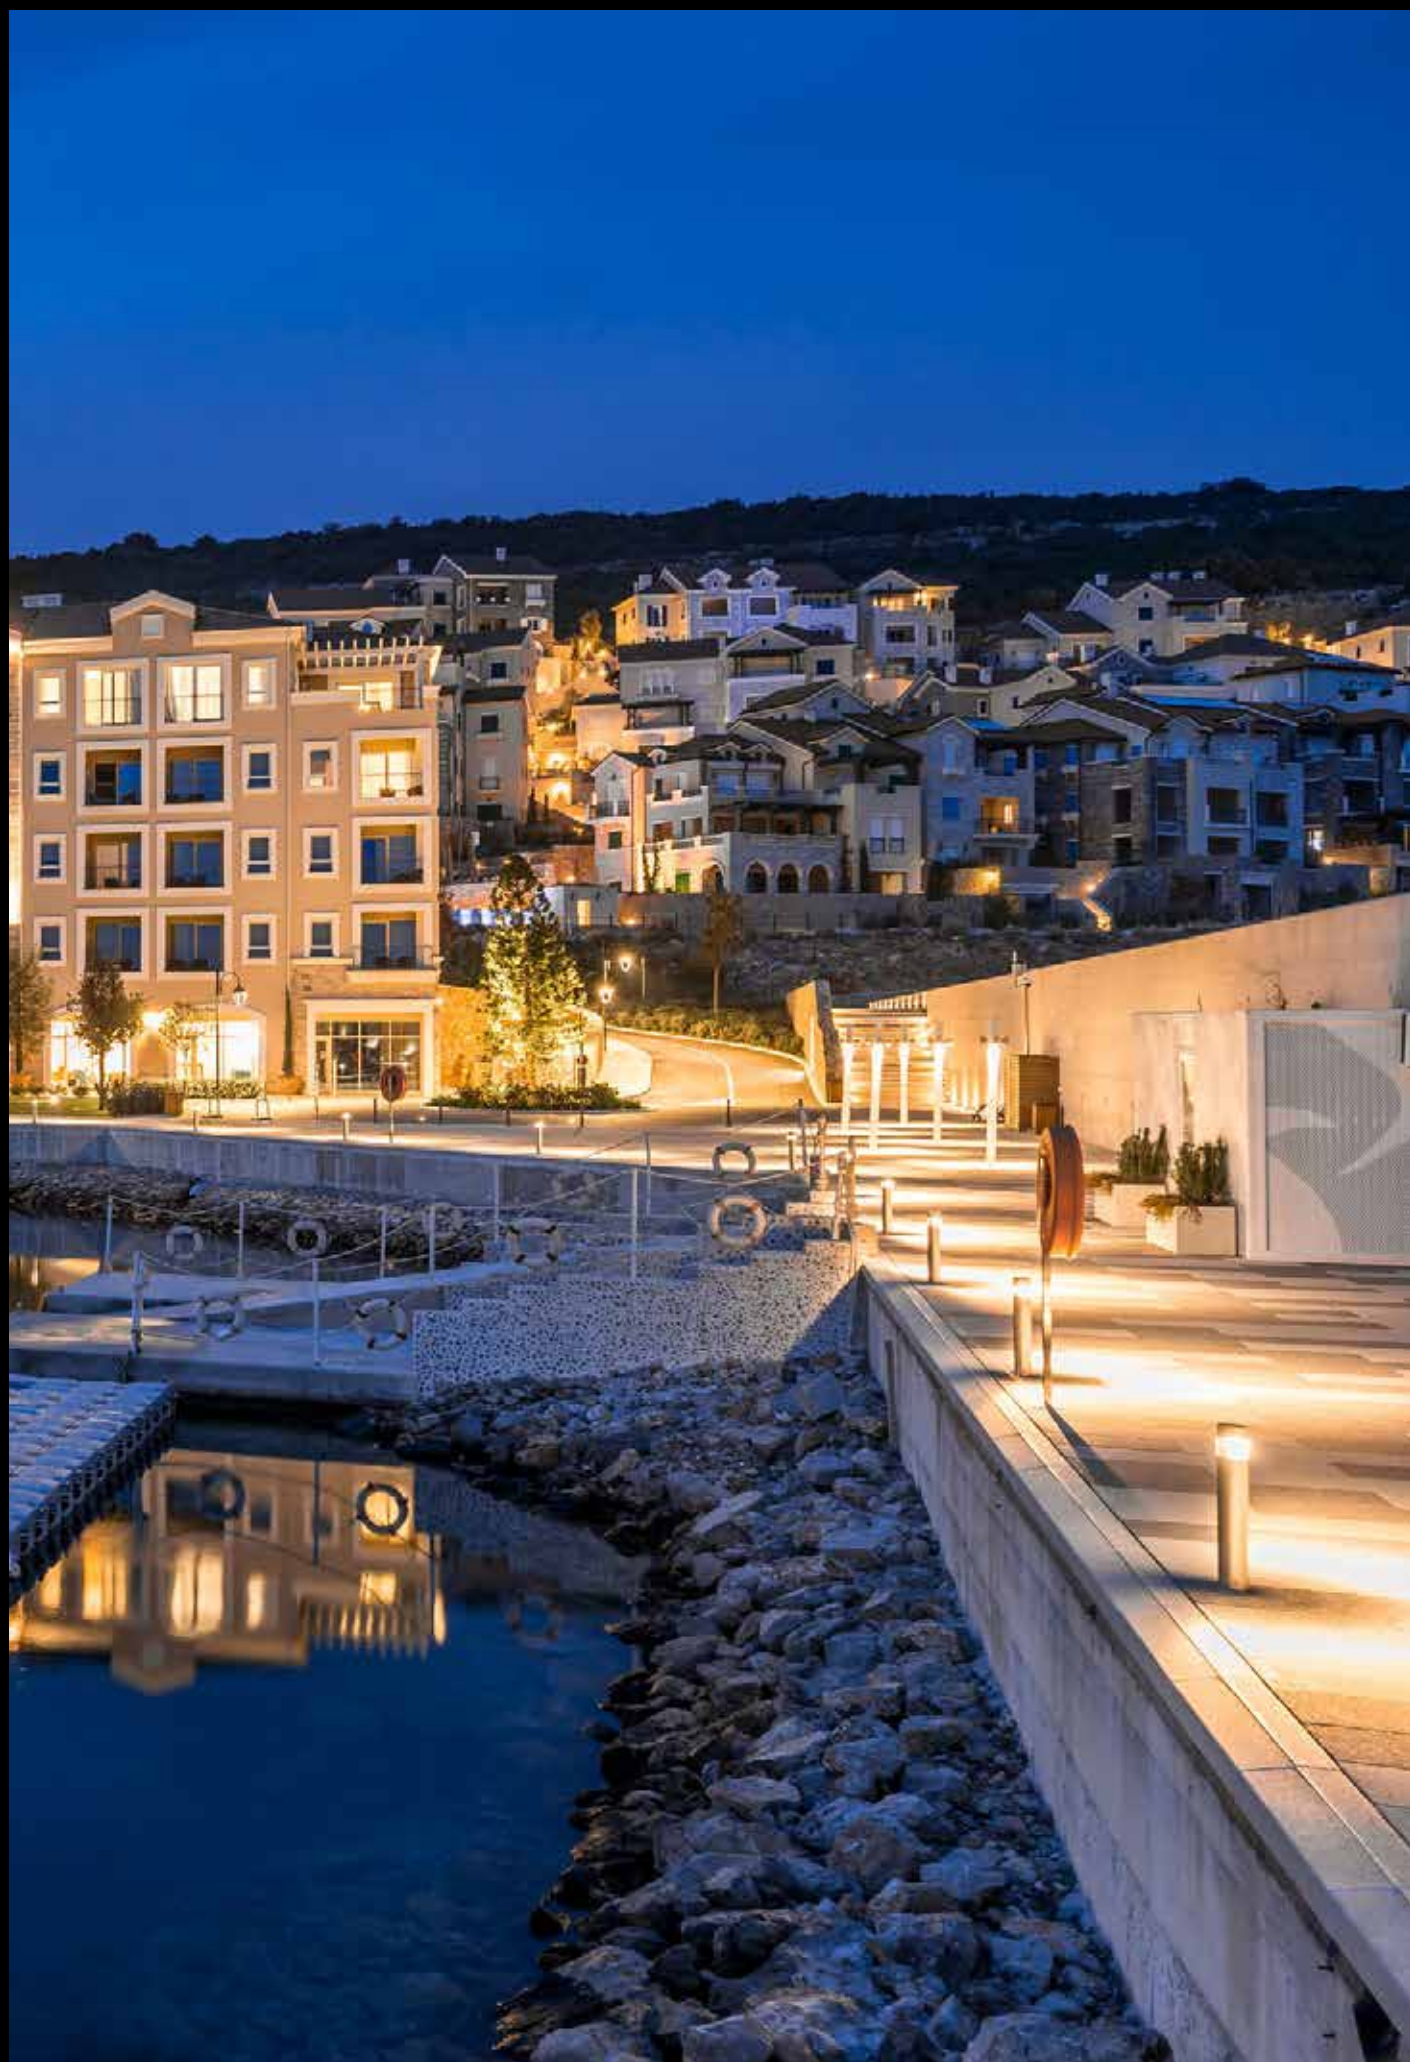

Ion Switch



High quality bollard with double surface protection such as cathodic electrocoat and powder coat. Two height options available with 5 light effects 90°, 2x 90°, 180°, 270°, and 360°, degrees radial optics. Anchor allows solid, safe and anti-vandal installation. Through feed junction box and integrated controls allow easy connection and light control.



Ion Switch

> Electrical

110-240V
 23W - 865 Lm (360 degrees)
 D - Dali
 V - 0-10V

> Technical

IP66	Aluminum body
Class II	Powder coated
ULSTD1598	Stainless steel screws
IK09	On site switch for light distribution
Anchor	On site head movement

> Color

27 - 2700K
 30 - 3000K
 40 - 4000K
 2 Step MacAdam
 CRI: 85

> Optics





QM 0-360
 Degrees
 (switch port)
 4m Radius

> Paint

W - RAL 9003 Structure (white)
 AT - RAL 7016 Structure (grey ant.)
 BK - RAL 9005 Structure (black)

> Dimensions & light effects

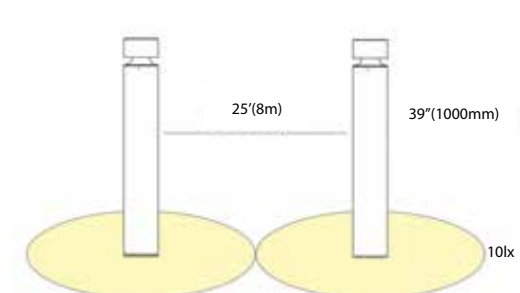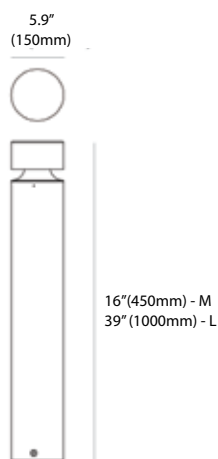

> Installation anchor order codes

201846 - Anchor

Ordering Information						
IN						
Model	Height	Power	Color Temp.	Optics (Radial)	Paint	Options
IN	M	L	27	QM	W	D
	L		30		AT	V
			40		BK	





Ion Matrix



Sensor controlled high quality bollard with double surface protection such as cataphoretic electro deposition and powder coat. Two height options available with 5 light effects 90o, 2x 90, 180, 270, and 360, degrees radial optics. Anchor allows solid, safe and anti-vandal installation. Through feed junction box and integrated controls allow easy connection and light control. Sensor reading technology empowers sustainable and energy efficient lighting.



Ion Matrix

> Electrical

110-240V
23W - 865 Lm (360 degrees)
D - Dali
V - 0-10V

> Technical

IP66
Class II
ULSTD1598
IK09
Anchor
PIR sensor reading 4m radius
Aluminum body
Powder coated
Stainless steel screws

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: 85

> Optics




QM 0-360
Degrees
4m Radius

> Paint

W - RAL 9003 Structure (white)
AT - RAL 7016 Structure (grey ant.)
BK - RAL 9005 Structure (black)

> PIR Sensor reading (4m radius)

Auto adjust light output
10% preset to 100%

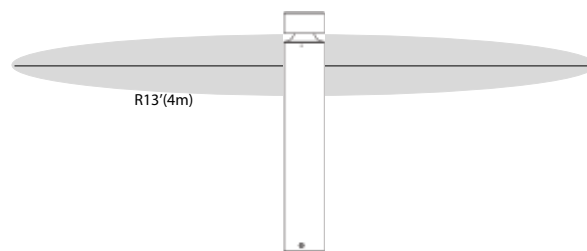


> Dimensions & light effects

5.9"
(150mm)



16" (450mm) - M
39" (1000mm) - L

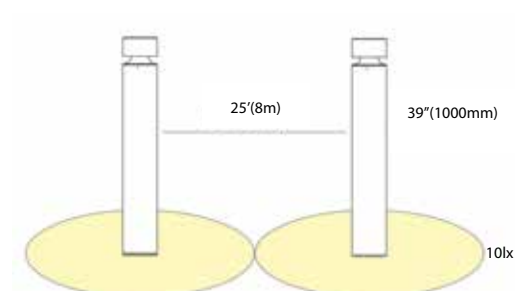

> Installation anchor order codes

201846 - Anchor

Ordering Information						
INX						
Model	Height	Powe	Color Temp.	Optics (Radial)	Paint	Options
INX	M	L	27	QM	W	D
	L		30		AT	V
			40		BK	





Hyperion



High quality bollard with double surface protection such as anodisation and powder coat. Two height options available with 2 light effects 90o or 2x 90 degrees direct optics. Anchor allows solid, safe and anti-vandal installation. Through feed junction box and integrated controls allow easy connection and light control. Single or double side illumination allow versatility in landscape integration.



Hyperion

> Electrical

110-240V
 L - 9W/435 Lm - 1 side
 L - 18W/870 Lm - 2 side
 D - Dali
 V - 0-10V

> Technical

IP66	1 or 2 side light effect
Class I	Aluminum body
ULSTD1598	Tempered glass surface
IK09	Integrated controls
Anchor	Powder coated
	Stainless steel screws

> Color

27 - 2700K
 30 - 3000K
 40 - 4000K
 2 Step MacAdam
 CRI: 85

> Optics



Wide beam





Deep beam


> Paint

W - RAL 9003 Structure (white)
 AT - RAL 7016 Structure (grey ant.)
 BK - RAL 9005 Structure (black)

> Light Effect - wide beam

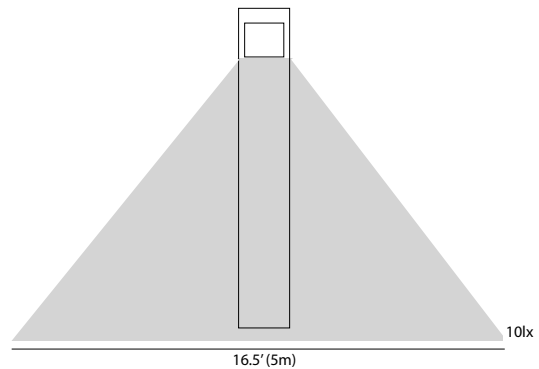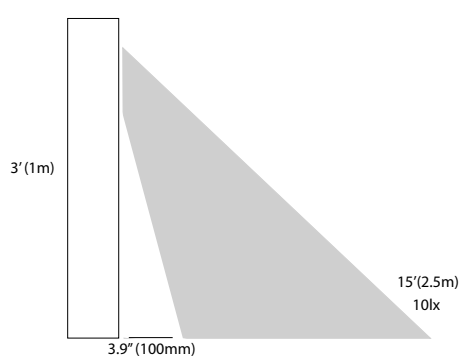

> Dimensions

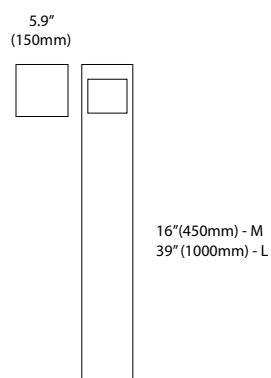

> Installation anchor order codes

201761 - Anchor

Ordering Information							
HY							
Model	Height	Power	Color Temp.	Optics	Light Side	Paint	Options
HY	M	L	27	W	1	W	D
	L		30	D	2	AT	V
			40			BK	





Hyperion Wall



High design wall light with glass top surface and trimless installation. Regressed back box allows recessing into facade insulation. Power supply and controls are available within the back box to ease installation. Specialty designed optics enable wide beam for great floor surface illumination.



Hyperion Wall

> Electrical

110-240V
L - 9W/435 Lm - 1 side
D - Dali
V - 0-10V

> Technical

IP66	Aluminum body
Class I	ABS facade back box
ULSTD1598	Integrated controls
IK09	Tempered glass surface
	Stainless steel screws

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: 85

> Optics





Wide beam




Deep beam

> Light Effect

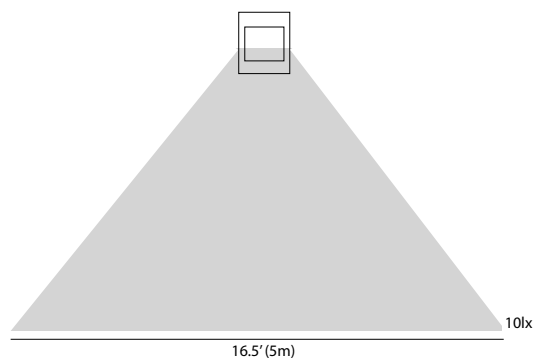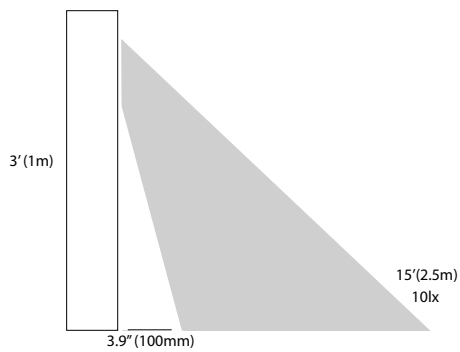

> Dimensions

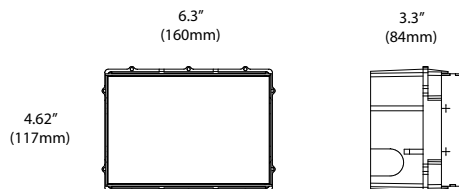

> Installation housing order codes

HYW150

Ordering Information				
HYW				
Model	Power	Optics	Color Temp.	Options
HYW	L	W	27	D
		D	30	V
			40	







Hemera



Linear surface mount solution with integrated performance optics for outdoor and indoor use. Machined aluminum housing for improved heat dissipation.



Hemera

> Electrical

24VDC fixture voltage
L - 10W/m - 1518 lm
H - 23W/m - 3550 lm

> Technical

IP67
Class III
ULSTD1598
IK07
Aluminum body
Glass top surface
High performance silicone optics
RAL9003
IN-OUT IP67 connector
(10m run)

> Color

27 - 2700K
30 - 3000K
40 - 4000K
2 Step MacAdam
CRI: 85

> Optics






GR 15x60 degrees

> Paint

RAL 9003 Structure (white) - standard
AT - RAL 7016 Structure (grey ant.)
BK - RAL 9005 Structure (black)

> Installation

S - Surface
A - Adjustable bracket
EA - Extended adjustable bracket

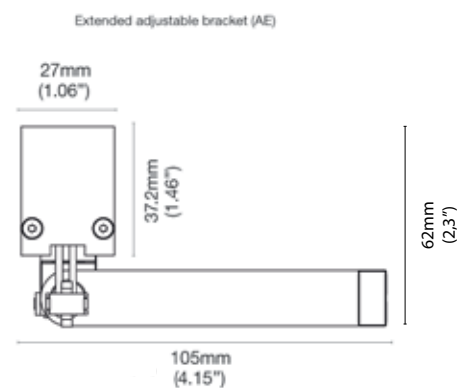

Ordering Information

HM				24			
Model	Lenght	Power	Color Temp.	Optics	Voltage	Installation Options	Paint options
HM	170	L	27	SP	24	S	AT
	320	H	30			A	BK
	620		40			EA	
	920						
	1070						
	1220						



Power Supply

Power supply On/Off - 12V

101052 - OT30 12V P

101053 - OT60 12V P

100879 - OT120 12V P

Power supply with integrated controls - 12V

102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)

Controls - 12V

102788 - OT DMX RGBW DIM 12/24V - 89W

101047 - OTI DALI DIM 60W 1CH

101046 - OT DIM 60W (1-10V)

Power supply On/Off - 24V

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power supply with integrated controls - 24V

102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)

Controls - 24V

102788 - OT DMX RGBW DIM 12/24V - 183W

101047 - OTI DALI DIM 120W 1CH

101046 - OT DIM 60W (1-10V)



Arpool S Projector



Underwater LED projector with high performance optics with snoot option. Glass lens creates optical effect of narrow and wide beam. For private and public water features.



Arpool S Projector

> Electrical

12/24 VDC fixture voltage
 L - 3W - 250 lm
 H - 6W - 450 lm
 H - 6W - RGBW

> Technical

IP68
 CLASS III
 UL STD 676
 CSA C22.2#89

Installation depth up to 5m
 Pools and fountains
 Chlorine and salty
 environment
 Stainless steel 316L
 Cable 3m, 6m 9m

> Color

30 - 3000K
 40 - 4000K
 RGBW
 2 Step MacAdam
 CRI: > 85

> Optics



SP Spot 15°





FL Flood 40°



W Wide 70°

> Installation

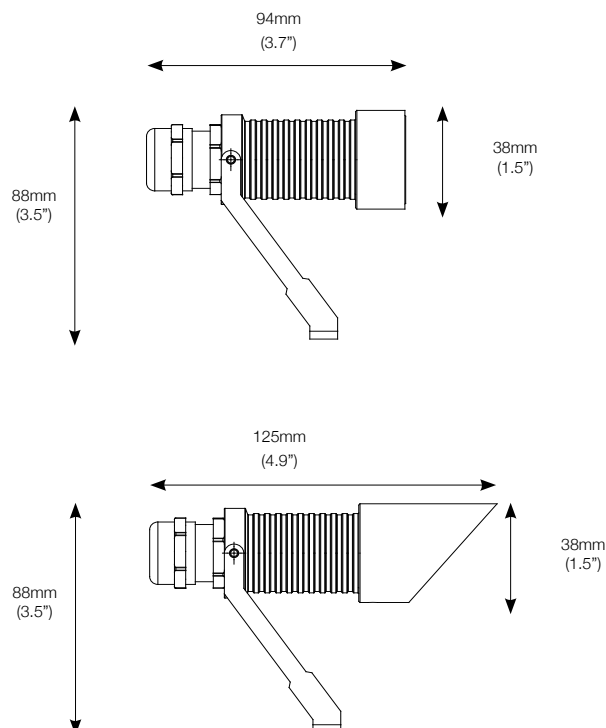

> Accessories

ASPS - Projector snoot

Ordering Information

ASP				12	
Model	Power	Color Temp.	Optics	Voltage	Options
ASP	L	30	SP	12	C - standard lenght 10' (3m)
		40	FL	24	C6 - 6m (20') cable lenght
	H	30	W		C9 - 9m (30') cable lenght
		40 RGBW			



Power Supply

Power supply On/Off - 12V

101052 - OT30 12V P

101053 - OT60 12V P

100879 - OT120 12V P

Power supply with integrated controls - 12V

102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)

Controls - 12V

102788 - OT DMX RGBW DIM 12/24V - 89W

101047 - OTI DALI DIM 60W 1CH

101046 - OT DIM 60W (1-10V)

Power supply On/Off - 24V

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power supply with integrated controls - 24V

102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)

Controls - 24V

102788 - OT DMX RGBW DIM 12/24V - 183W

101047 - OTI DALI DIM 120W 1CH

101046 - OT DIM 60W (1-10V)



Arpool M Projector



Underwater LED projector with high performance optics with snoot option. Glass lens creates optical effect of narrow and wide beam. For private and public water features.



Arpool M Projector

> Electrical

12/24 VDC fixture voltage
 L - 9W - 765 lm
 H - 15W - 1050 lm
 H - 15W - RGBW

> Technical

IP68
 CLASS III
 UL STD 676
 CSA C22.2#89

Installation depth up to 5m
 Pools and fountains
 Chlorine and salty
 environment
 Stainless steel 316L
 Cable 3m, 6m 9m

> Color

30 - 3000K
 40 - 4000K
 RGBW
 2 Step MacAdam
 CRI: > 85

> Optics



SP Spot 15°






FL Flood 40°



W Wide 70°

> Installation

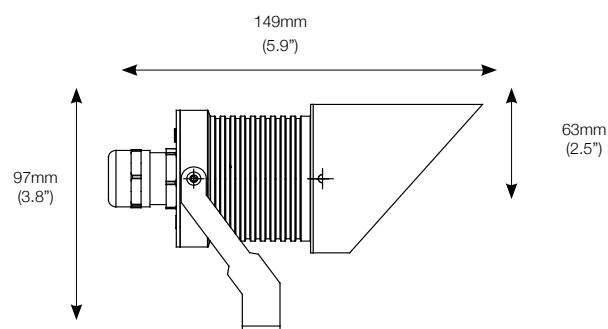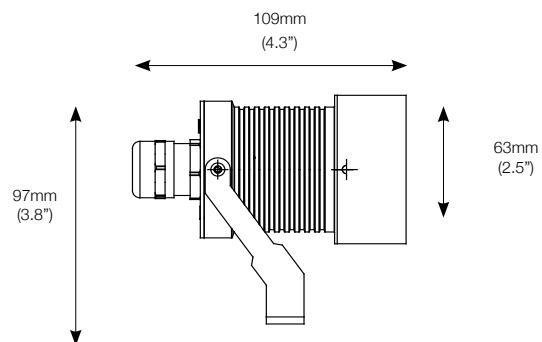

> Accessories

AMPS - Projector snoot

Ordering Information					
AMP			12		
Model	Power	Color Temp.	Optics	Voltage	Options
AMP	L	30 40	SP FL W	12 24	C - standard lenght 10' (3m) C6 - 6m (20') cable lenght C9 - 9m (30') cable lenght
	H	30 40 RGBW			



Power Supply	
Power supply On/Off - 12V 101052 - OT30 12V P 101053 - OT60 12V P 100879 - OT120 12V P Power supply with integrated controls - 12V 102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS) Controls - 12V 102788 - OT DMX RGBW DIM 12/24V - 89W 101047 - OTI DALI DIM 60W 1CH 101046 - OT DIM 60W (1-10V)	Power supply On/Off - 24V 103233 - OT60 24V P 103196 - OT130 24V P 103234 - OT250 24V P Power supply with integrated controls - 24V 102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS) Controls - 24V 102788 - OT DMX RGBW DIM 12/24V - 183W 101047 - OTI DALI DIM 120W 1CH 101046 - OT DIM 60W (1-10V)



Arpool XM Projector



Underwater LED projector with high performance optics with snoot option. Glass lens creates optical effect of narrow and wide beam. For private and public water features.



Arpool XM Projector

> Electrical

12/24 Vdc fixture voltage
 L - 21W - 1785 lm
 L - 21W - RGBW

> Technical

IP68
 CLASS III
 UL STD 676
 CSA C22.2#89

Installation depth 5m
 Pools and water features
 Chlorine and salty
 environment
 Stainless steel 316L
 Cable 3m, 6m 9m

> Color

30 - 3000K
 40 - 4000K
 RGBW
 2 Step MacAdam
 CRI: > 85

> Optics



SP Spot 15°





FL Flood 40°



W Wide 70°

> Installation

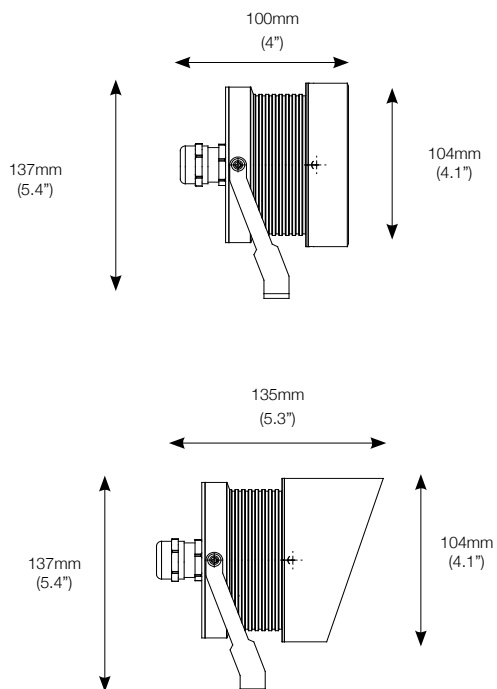

> Installation housing order codes

AXMPS - Projector snoot

Ordering Information					
AXMP					
Model	Power	Color Temp.	Optics	Voltage	Options
AXMP	L	30	SP	12	C - standard lenght 10' (3m)
		40	FL	24	C6 - 6m (20') cable lenght
		RGBW	W		C9 - 9m (30') cable lenght



Power Supply	
Power supply On/Off - 12V	Power supply On/Off - 24V
101052 - OT30 12V P	103233 - OT60 24V P
101053 - OT60 12V P	103196 - OT130 24V P
100879 - OT120 12V P	103234 - OT250 24V P
Power supply with integrated controls - 12V	Power supply with integrated controls - 24V
102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)	102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)
Controls - 12V	Controls - 24V
102788 - OT DMX RGBW DIM 12/24V - 89W	102788 - OT DMX RGBW DIM 12/24V - 183W
101047 - OTI DALI DIM 60W 1CH	101047 - OTI DALI DIM 120W 1CH
101046 - OT DIM 60W (1-10V)	101046 - OT DIM 60W (1-10V)



Arpool S



Underwater LED with high performance optics with trim and trimless options. Glass lens creates optical effect of narrow and wide beam. For private, public and hotel pools.



Arpool S

> Electrical

12/24 VDC fixture voltage
 L - 3W - 250 lm
 H - 6W - 450 lm
 H - 6W - RGBW

> Technical

IP68
 CLASS III
 UL STD 676
 CSA C22.2#89

Installation depth 5m
 Concrete and SS pools
 Chlorine and salty
 environment
 Stainless steel 316L
 Cable 3m, 6m 9m

> Color

30 - 3000K
 40 - 4000K
 RGBW
 2 Step MacAdam
 CRI: > 85

> Optics



SP Spot 15°




FL Flood 40°




W Wide 70°

> Installation

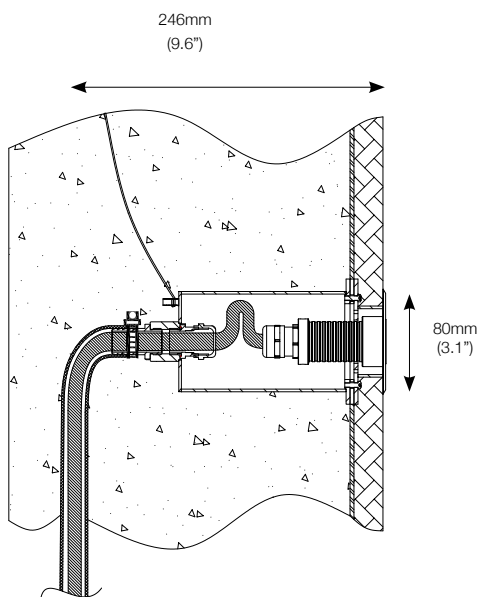

Trim (TM)
 AS402 - (TM)

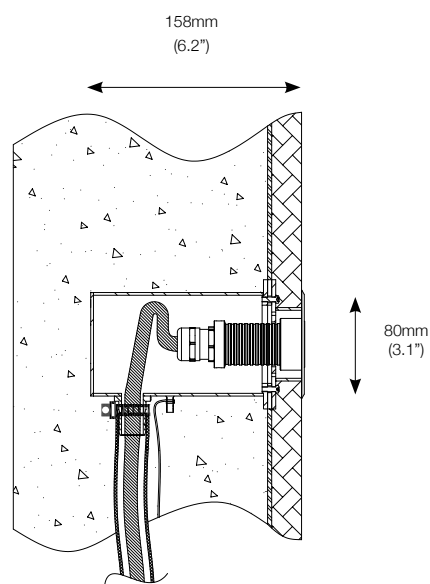

Trim (TM)
 AS402S - (TM)
 Side Feed

> Installation housing order codes

AS402 - TM
 AS402S - TM - side feed
 ASSS - Adapter for SS pool

Ordering Information

AS	TM					
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
AS	TM	L	30	SP	12	C - standard lenght 10' (3m)
			40	FL	24	C6 - 6m (20') cable lenght
		H	30	W		C9 - 9m (30') cable lenght
			40 RGBW			



Power Supply

Power supply On/Off - 12V

101052 - OT30 12V P
 101053 - OT60 12V P
 100879 - OT120 12V P

Power supply with integrated controls - 12V

102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)

Controls - 12V

102788 - OT DMX RGBW DIM 12/24V - 89W
 101047 - OTI DALI DIM 60W 1CH
 101046 - OT DIM 60W (1-10V)

Power supply On/Off - 24V

103233 - OT60 24V P
 103196 - OT130 24V P
 103234 - OT250 24V P

Power supply with integrated controls - 24V

102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)

Controls - 24V

102788 - OT DMX RGBW DIM 12/24V - 183W
 101047 - OTI DALI DIM 120W 1CH
 101046 - OT DIM 60W (1-10V)



Arpool M



Underwater LED with high performance optics with trim option. Glass lense creates optical effect of narrow and wide beam. For private, public and hotel pools.



Arpool M

> Electrical

12/24 VDC fixture voltage
 L - 9W - 765 lm
 H - 15W - 1050 lm
 H - 15W - RGBW

> Technical

IP68
 CLASS III
 UL STD 676
 CSA C22.2#89

Installation depth 5m
 Concrete and SS pools
 Chlorine and salty
 environment
 Stainless steel 316L
 Cable 3m, 6m 9m

> Color

30 - 3000K
 40 - 4000K
 RGBW
 2 Step MacAdam
 CRI: > 85

> Optics



SP Spot 15°





FL Flood 40°



W Wide 70°

> Installation

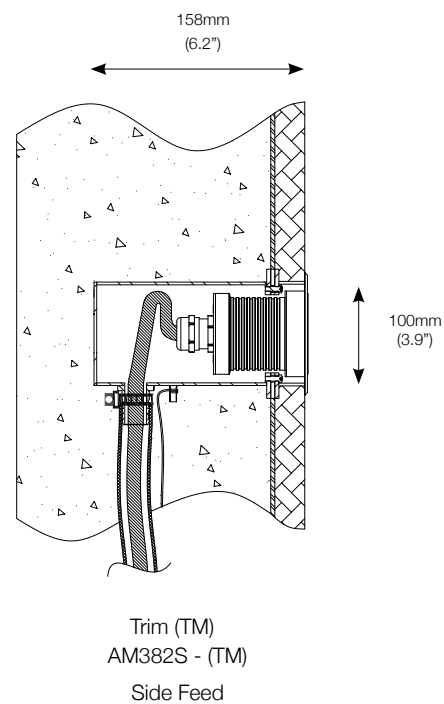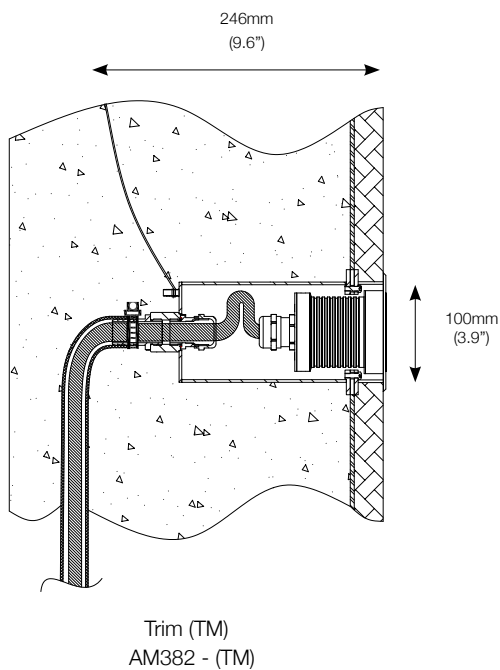

> Installation housing order codes

AM382 - TM
AM382S - TM - side feed
AMSS - Adapter for SS pool

Ordering Information						
AM	TM					
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
AM	TM	L	30	SP	12	C - standard lenght 10' (3m)
			40	FL	24	C6 - 6m (20') cable lenght
		H	30	W		C9 - 9m (30') cable lenght
			40			
			RGBW			



Power Supply	
Power supply On/Off - 12V	Power supply On/Off - 24V
101052 - OT30 12V P	103233 - OT60 24V P
101053 - OT60 12V P	103196 - OT130 24V P
100879 - OT120 12V P	103234 - OT250 24V P
Power supply with integrated controls - 12V	Power supply with integrated controls - 24V
102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)	102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)
Controls - 12V	Controls - 24V
102788 - OT DMX RGBW DIM 12/24V - 89W	102788 - OT DMX RGBW DIM 12/24V - 183W
101047 - OTI DALI DIM 60W 1CH	101047 - OTI DALI DIM 120W 1CH
101046 - OT DIM 60W (1-10V)	101046 - OT DIM 60W (1-10V)



Arpool XM



Underwater LED with high performance optics with trim option. Glass lense creates optical effect of narrow and wide beam. Extreme elegance with high lumen output allows in private, public and hotel pools.



Arpool XM

> Electrical

12/24 Vdc fixture voltage
 L - 21W - 1785 lm
 L - 21W - RGBW

> Technical

IP68
 CLASS III
 UL STD 676
 CSA C22.2#89
 Installation depth 5m
 Concrete and SS pools
 Chlorine and salty
 environment
 Stainless steel 316L
 Cable 3m, 6m 9m

> Color

30 - 3000K
 40 - 4000K
 RGBW
 2 Step MacAdam
 CRI: > 85

> Optics



SP Spot 15°




FL Flood 40°



W Wide 70°

> Installation

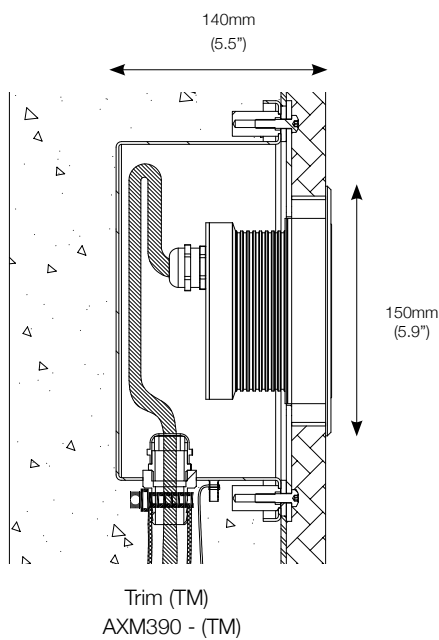

> Installation housing order codes

AXM390 - TM
AXMSS - Adapter for SS pool

Ordering Information						
AXM					12	
Model	Installation	Power	Color Temp.	Optics	Voltage	Options
AXM	TM	L	30	SP	12	C - standard lenght 10' (3m)
			40	FL	24	C6 - 6m (20') cable lenght
			RGBW	W		C9 - 9m (30') cable lenght



Power Supply	
Power supply On/Off - 12V	Power supply On/Off - 24V
101052 - OT30 12V P	103233 - OT60 24V P
101053 - OT60 12V P	103196 - OT130 24V P
100879 - OT120 12V P	103234 - OT250 24V P
Power supply with integrated controls - 12V	Power supply with integrated controls - 24V
102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)	102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)
Controls - 12V	Controls - 24V
102788 - OT DMX RGBW DIM 12/24V - 89W	102788 - OT DMX RGBW DIM 12/24V - 183W
101047 - OTI DALI DIM 60W 1CH	101047 - OTI DALI DIM 120W 1CH
101046 - OT DIM 60W (1-10V)	101046 - OT DIM 60W (1-10V)



FILIX

Arpool L



Underwater LED with high performance optics with trim and trimless options. PC lens creates optical effect of narrow and wide beam.

For private, public and hotel pools.

Arpool L

> Electrical

12/24 VDC fixture voltage

L - 35W - 1785 lm

H - 65W - 1785 lm

L - 35W - RGBW

H - 65W - RGBW

> Technical

IP68

CLASS III

UL STD 676

CSA C22.2#89

*Corrosion

protection C4

Severe ISO9227

Installation depth 5m

Concrete and SS pools

Chlorine and salty
environment

Stainless steel 316L

Cable 3m, 6m 9m

> Color

30 - 3000K

40 - 4000K

RGBW

2 Step MacAdam

CRI: > 85

> Finish

P - Polished

M - Sandblast mate

*B - Painted black

> Optics



SP Spot 15°



FL Flood 45°



W Wide 70°






E Elliptical
15x36°



SE Elliptical
20x120°

> Installation

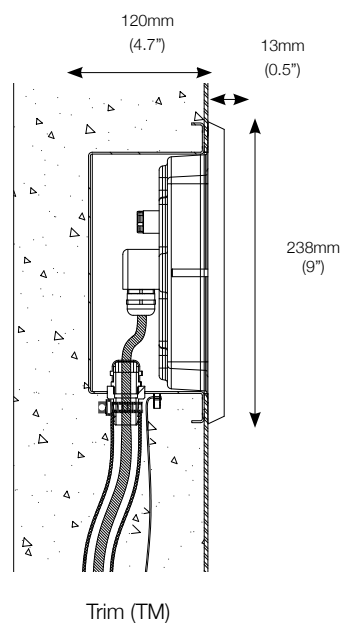


> Installation housing order codes

AL370 - TM
ALSS - Adapter for SS pool

Ordering Information							
AL						12	
Model	Installation	Finish	Power	Color Temp.	Optics	Voltage	Options
AL	TMR	P	L	30	SP	12	C - standard lenght 10' (3m)
	TMS	M	H	40	FL	24	C6 - 6m (20') cable lenght
		B		RGBW	W		C9 - 9m (30') cable lenght
					EL		
					SE		



Power Supply	
Power supply On/Off - 12V	Power supply On/Off - 24V
101052 - OT30 12V P	103233 - OT60 24V P
101053 - OT60 12V P	103196 - OT130 24V P
100879 - OT120 12V P	103234 - OT250 24V P
Power supply with integrated controls - 12V	Power supply with integrated controls - 24V
102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)	102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)
Controls - 12V	Controls - 24V
102788 - OT DMX RGBW DIM 12/24V - 89W	102788 - OT DMX RGBW DIM 12/24V - 183W
101047 - OTI DALI DIM 60W 1CH	101047 - OTI DALI DIM 120W 1CH
101046 - OT DIM 60W (1-10V)	101046 - OT DIM 60W (1-10V)

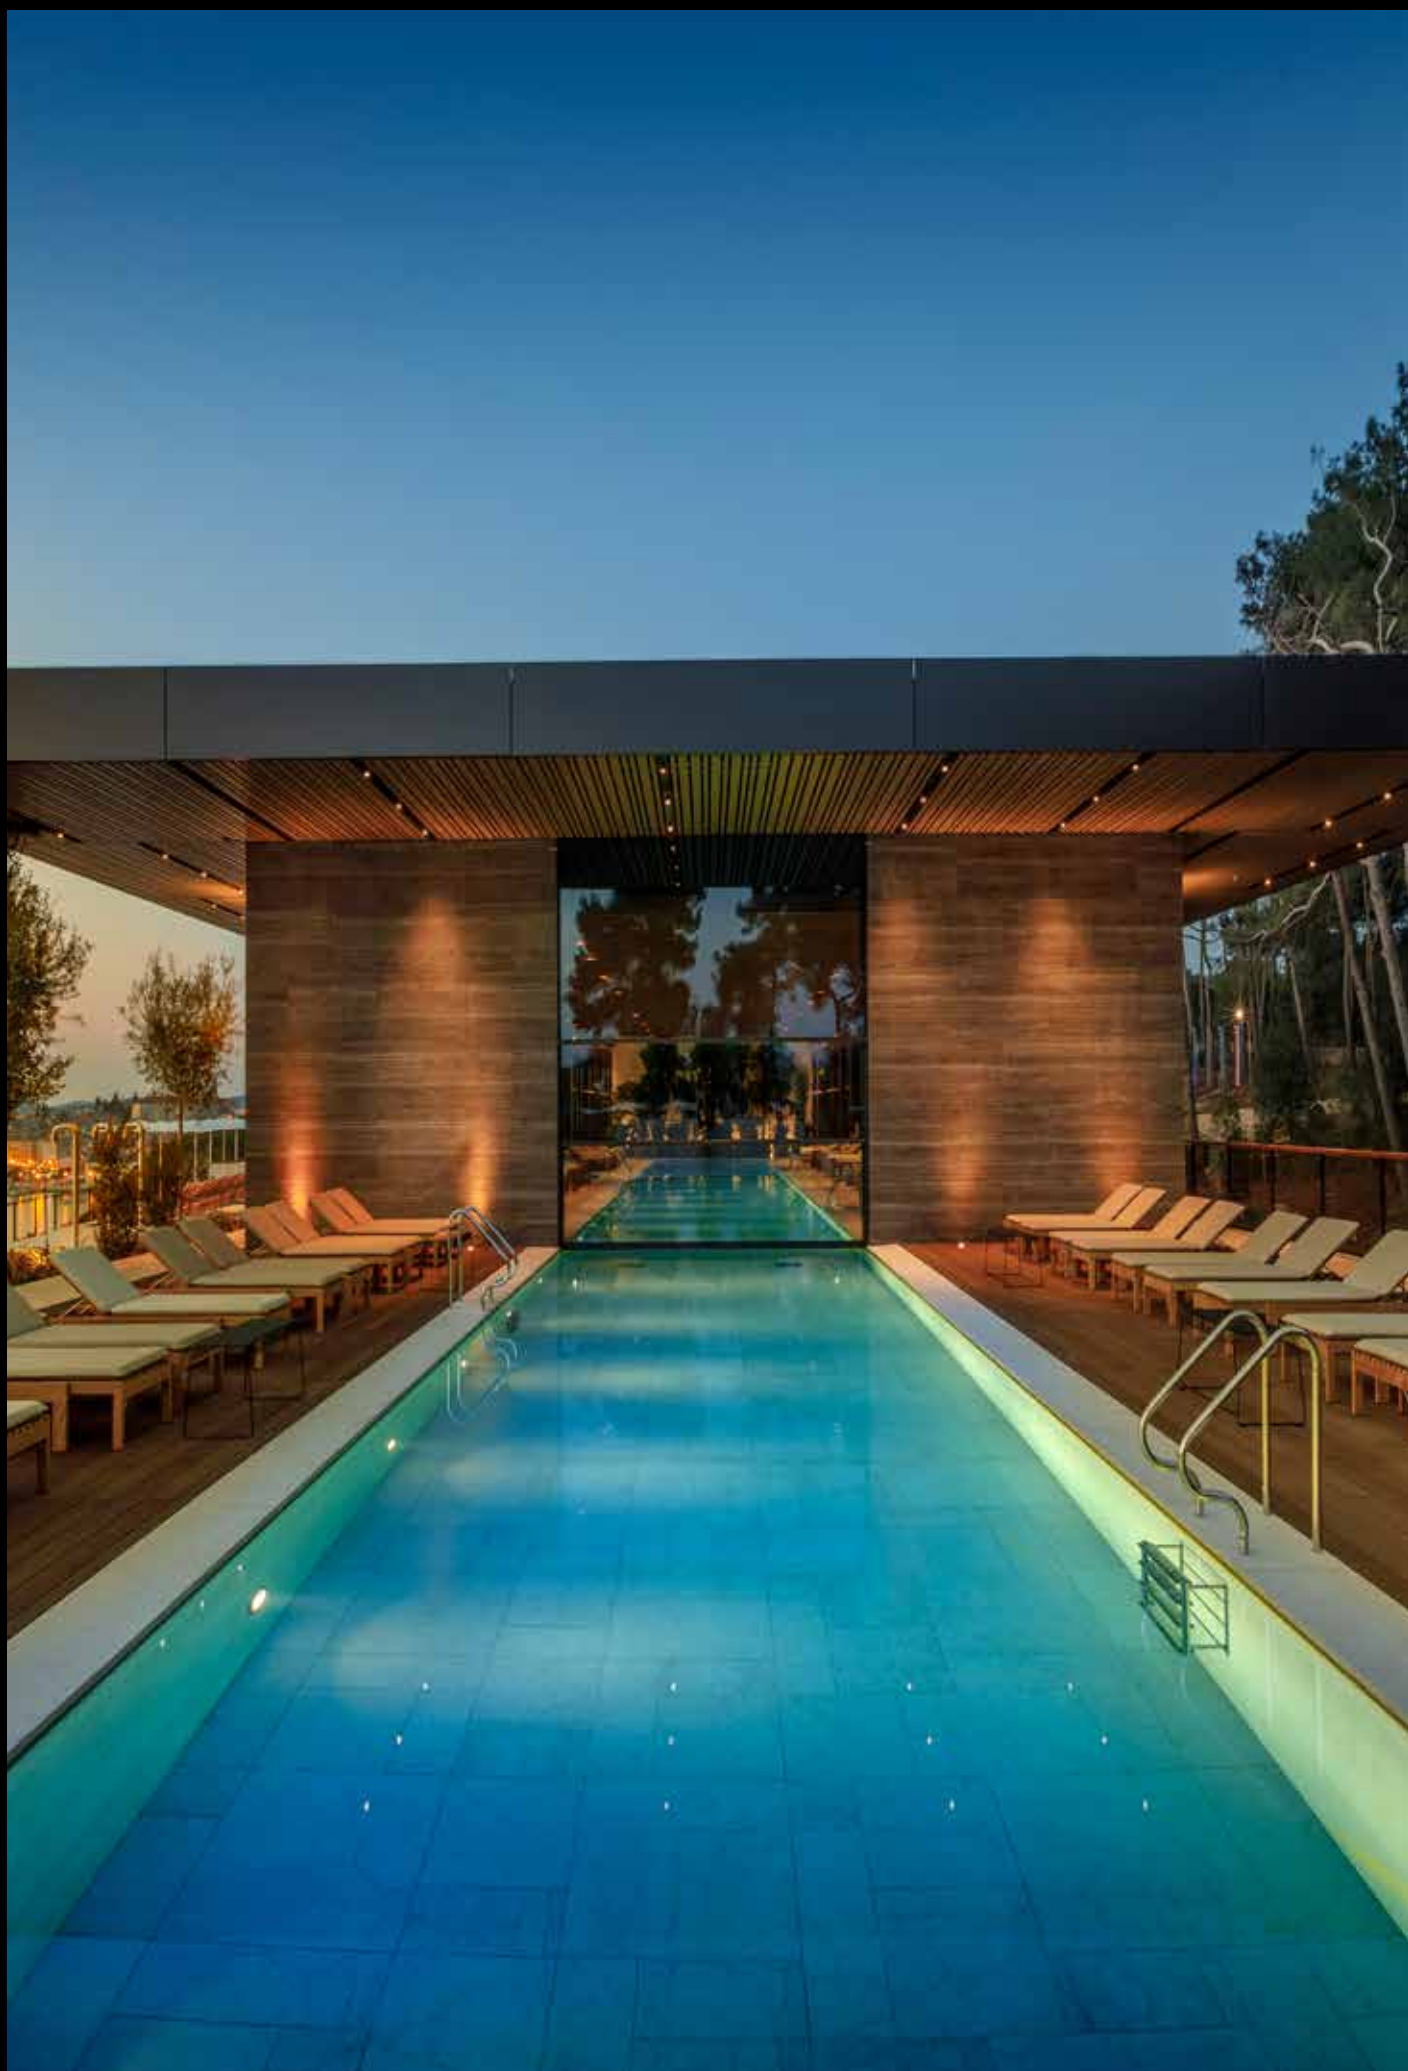

Arpool Dawn



Underwater LED with high performance optics with trim option and wide elliptical optics. Glass lens creates optical effect of narrow and super wide beam. Enhanced and modern design for private, public and hotel pools.



Arpool Dawn

> Electrical

12/24 VDC fixture voltage
 L - 35W - 2900 lm
 L - 35W - RGBW

> Technical

IP68
 CLASS III
 UL STD 676
 CSA C22.2#89
 *Corrosion
 protection C4
 Severe ISO9227

Installation depth 5m
 Concrete and SS pools
 Chlorine and salty
 environment
 Stainless steel 316L
 Cable 3m, 6m 9m

> Color

30 - 3000K
 40 - 4000K
 RGBW
 2 Step MacAdam
 CRI: > 85

> Finish

P - Polished
 M - Sandblast mate
 *B - Painted black

> Optics





E Elliptical
15x60°



EA Elliptical
Asymetric

> Installation

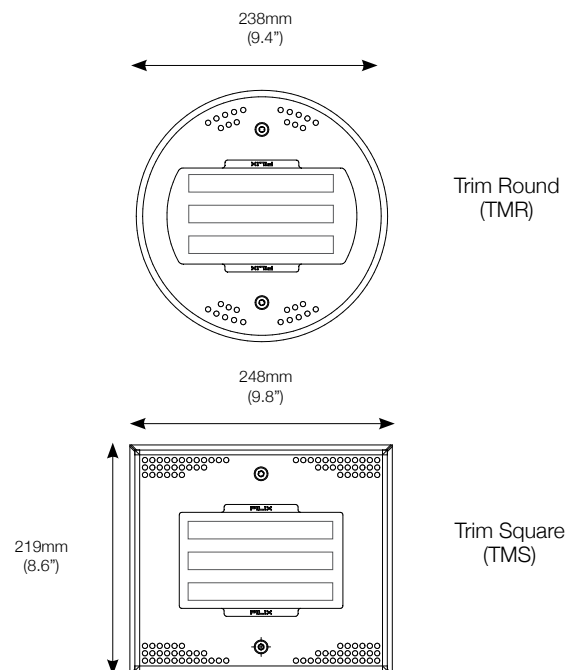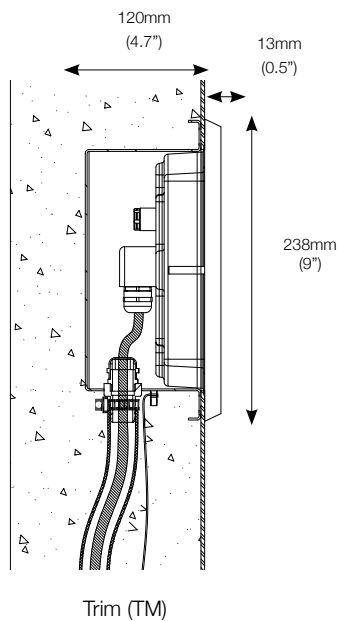

> Installation housing order codes

AL370 - TM

ALSS - Adapter for SS pool


Ordering Information

AL						12	
Model	Installation	Finish	Power	Color Temp.	Optics	Voltage	Options
AL	TMR	P	L	30	E	12	C- standard lenght 10' (3m)
	TMS	M		40	EA	24	C6 - 6m (20') cable lenght
		B		RGBW			C9 - 9m (30') cable lenght



Power Supply

Power supply On/Off - 12V	Power supply On/Off - 24V
101052 - OT30 12V P	103233 - OT60 24V P
101053 - OT60 12V P	103196 - OT130 24V P
100879 - OT120 12V P	103234 - OT250 24V P
Power supply with integrated controls - 12V	Power supply with integrated controls - 24V
102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)	102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)
Controls - 12V	Controls - 24V
102788 - OT DMX RGBW DIM 12/24V - 89W	102788 - OT DMX RGBW DIM 12/24V - 183W
101047 - OTI DALI DIM 60W 1CH	101047 - OTI DALI DIM 120W 1CH
101046 - OT DIM 60W (1-10V)	101046 - OT DIM 60W (1-10V)

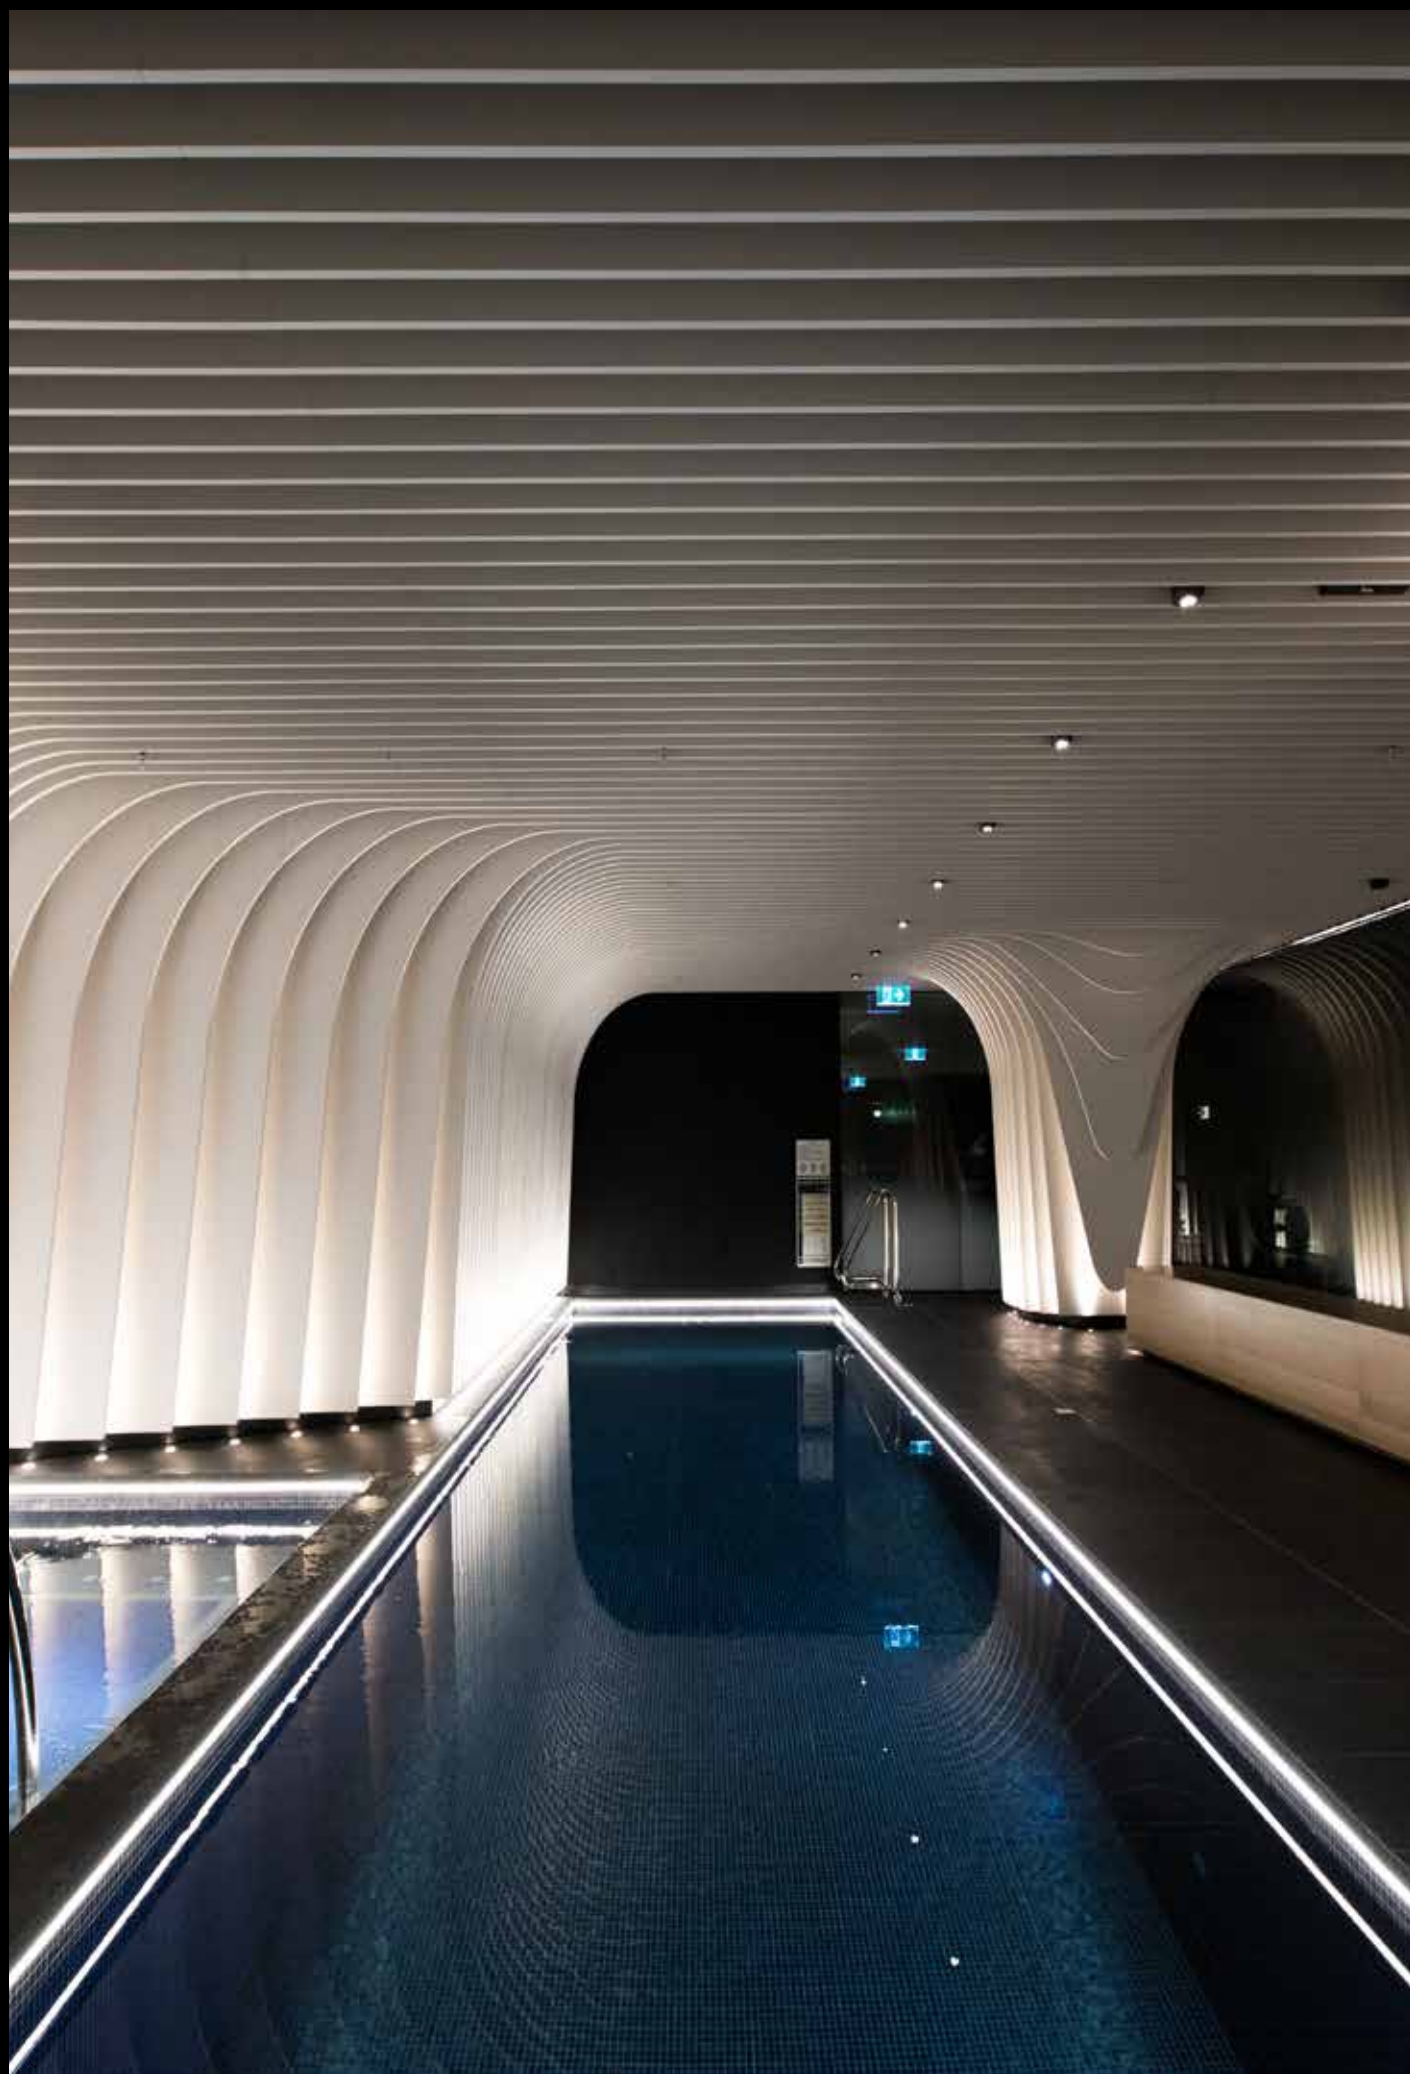

Arpool Nexus



Linear IP68 continuous line of light for underwater pools and fountains application. Specially designed housing and gasket allow feed through connection as well as concrete insulation of installation housing. Single line of light up to 10M in white and RGBW.



Arpool Nexus

> Electrical

12/24VDC fixture voltage

L - 10W/m 210 lm

L - 18W/m RGBW

> Technical

IP68

CLASS III

UL STD 676

CSA C22.2#89

Installation depth 5m

Continuous

Concrete and

Chlorine and salty
environment

Stainless steel 316L

Cable 3m, 6m 9m

> Color

30 - 3000K

40 - 4000K

RGBW

2 Step MacAdam


CRI: > 85

> Optics



LL even
illumination

> Installation



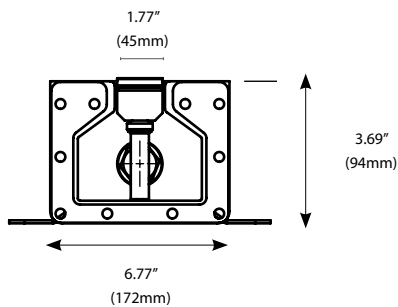


Up to 10m max.(A,B,...B, C)
(393")

A

B

C






15.7"
(400mm)

15.7"
(400mm)

15.7"
(400mm)

15.7"
(400mm)

15.7"
(400mm)

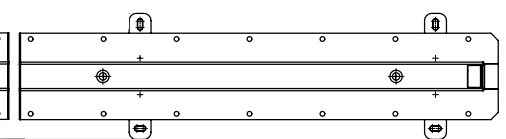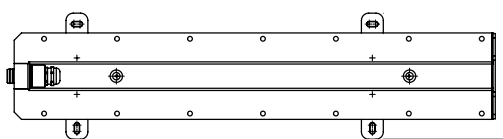

25.8"
(657mm)

24.8"
(632mm)

25.8"
(657mm)

> Installation housing order codes

A501- start (left) installation housing

B503 - central installation housing

C505 - end (right) installation housing


Ordering Information

AX					12	
Model	Type	Power	Color Temp.	Optics	Voltage	Options
AX	A	L	30	LL	12	CX
	B		40		24	C3
	C		RGBW			C9



Power Supply

Power supply On/Off - 12V	Power supply On/Off - 24V
101052 - OT30 12V P	103233 - OT60 24V P
101053 - OT60 12V P	103196 - OT130 24V P
100879 - OT120 12V P	103234 - OT250 24V P
Power supply with integrated controls - 12V	Power supply with integrated controls - 24V
102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)	102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)
Controls - 12V	Controls - 24V
102788 - OT DMX RGBW DIM 12/24V - 89W	102788 - OT DMX RGBW DIM 12/24V - 183W
101047 - OTI DALI DIM 60W 1CH	101047 - OTI DALI DIM 120W 1CH
101046 - OT DIM 60W (1-10V)	101046 - OT DIM 60W (1-10V)

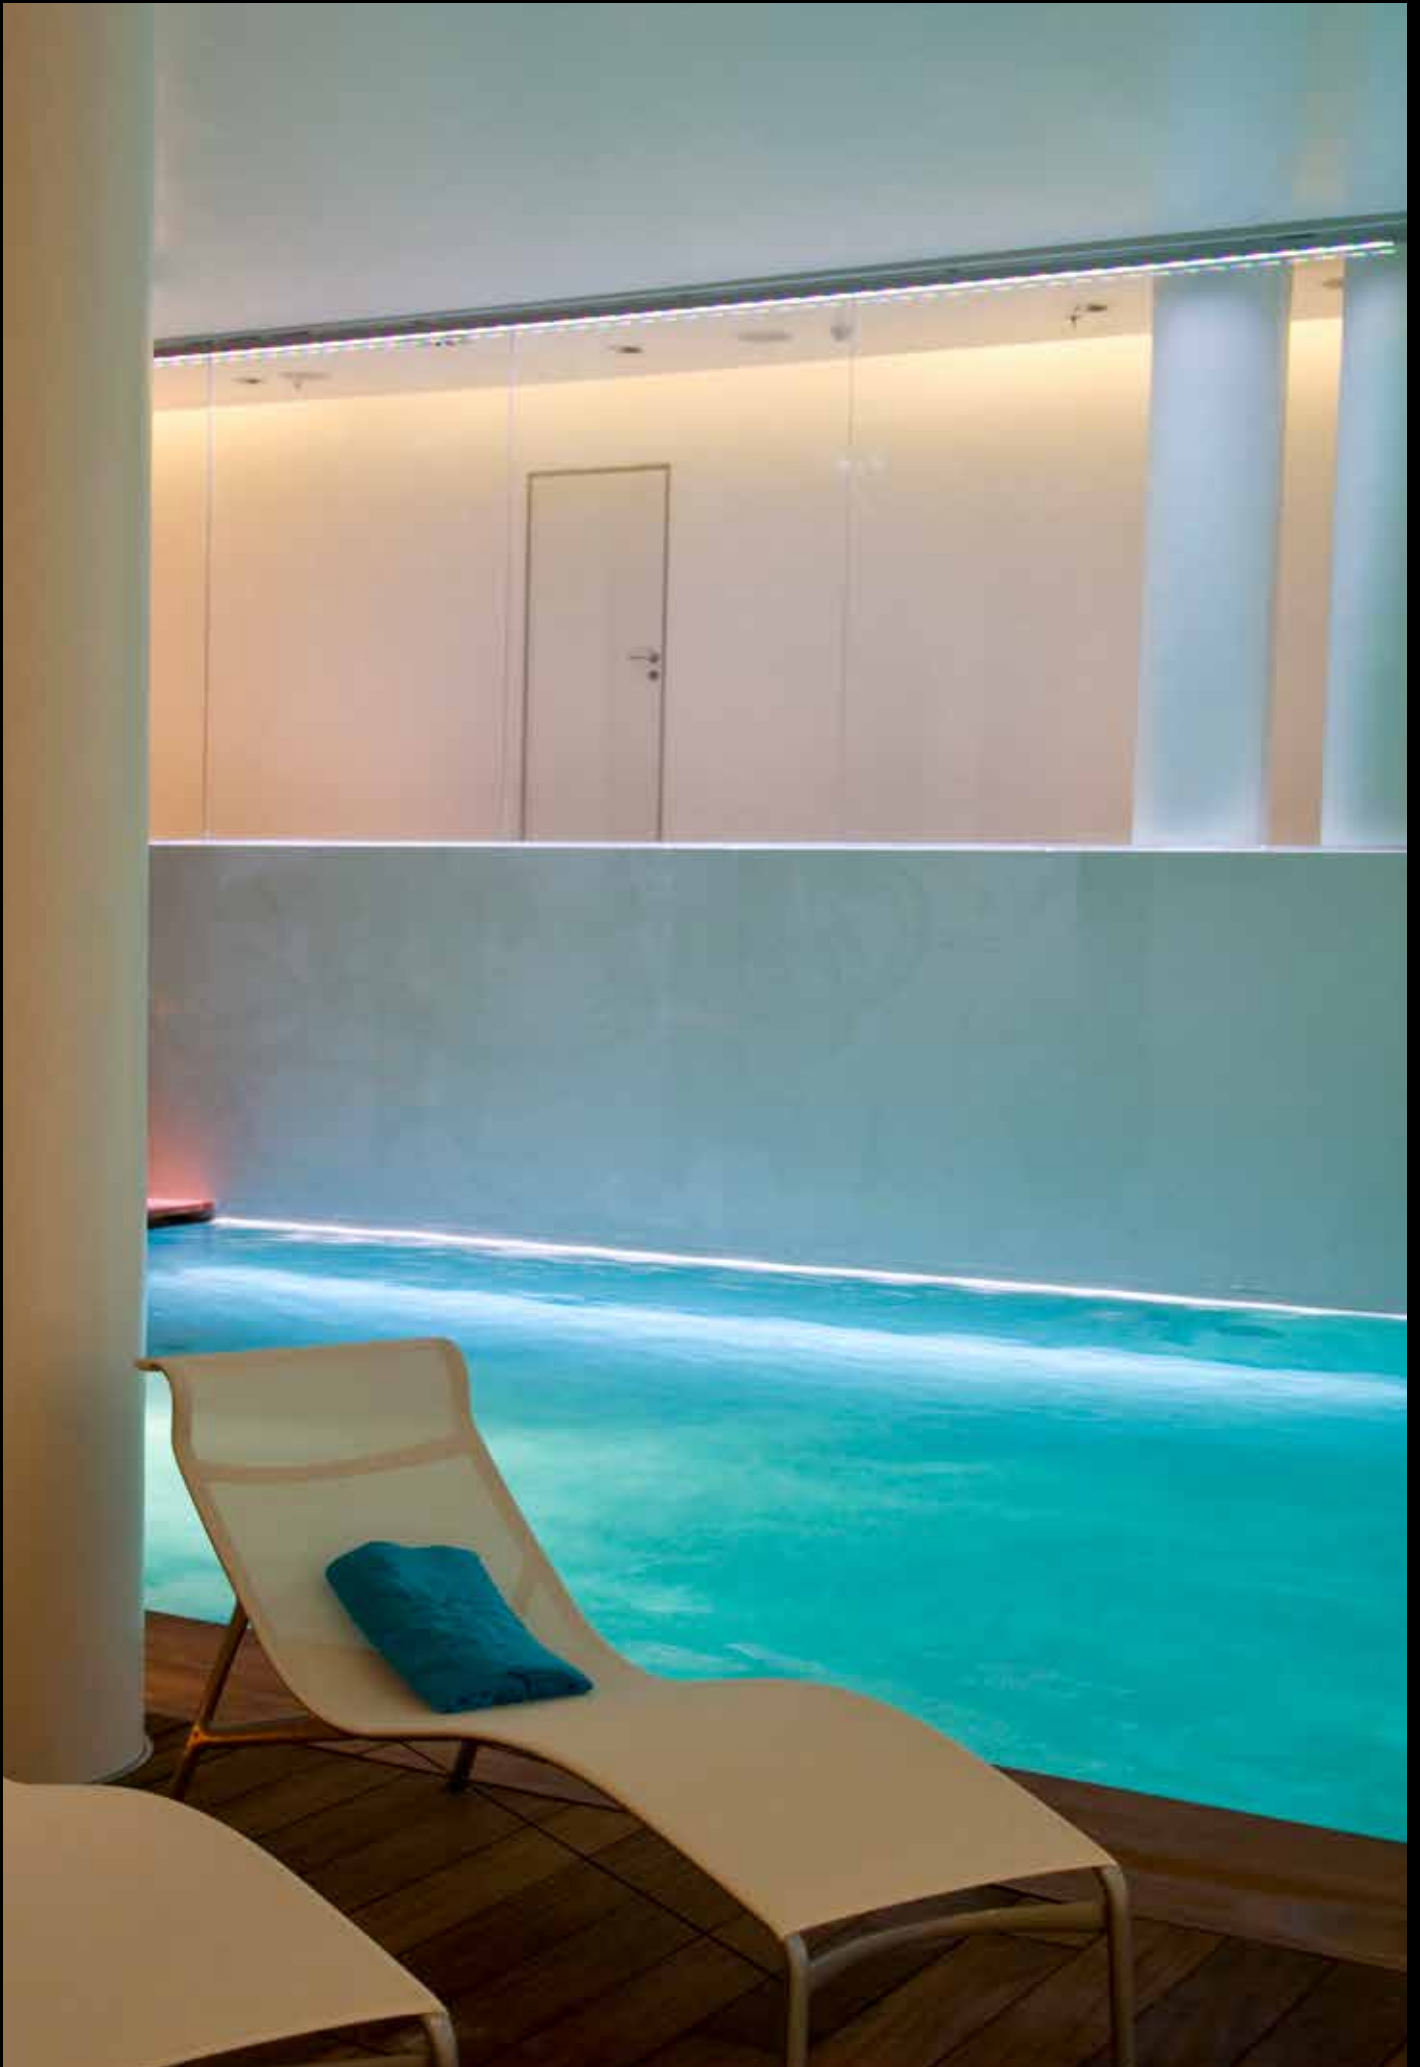

Arpool Linear Recessed



Linear light with high performance optics for underwater use. Stainless steel 316 L housing with tempered glass lens for recessed installation.



Arpool Linear Recessed

> Electrical

12/24VDC fixture voltage

L - 39W/m - 2652 lm

H - 63W/m - 4384 lm

L - 47W/m - RGBW

> Technical

IP68

CLASS III

UL STD 676

CSA C22.2#89

Installation depth 5m

Concrete pools

Chlorine and salty
environment

Stainless steel 316L

Cable 3m, 6m 9m

> Color

30 - 3000K

40 - 4000K

RGBW

2 Step MacAdam

CRI: > 85

> Optics



SP Spot 17°



FL Flood 31°



GR
Graze 14°x40°




GR20
14°x 40° tilt 20



GRW Graze 10°x60°

> Installation

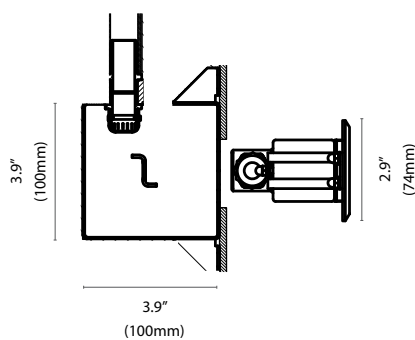

> Installation housing order codes

AR413

AR415

Ordering Information

ALR					12	
Model	Length	Power	Color Temp.	Optics	Voltage	Options
ALR	360 660	L	30	SP	12	C - standard length 10' (3m) C6 - 6m (20') cable length C9 - 9m (30') cable length
			40	FL	24	
		H	RGBW	GR		
			30	GR20		
			40	GRW		



Power Supply	
Power supply On/Off - 12V	Power supply On/Off - 24V
101052 - OT30 12V P	103233 - OT60 24V P
101053 - OT60 12V P	103196 - OT130 24V P
100879 - OT120 12V P	103234 - OT250 24V P
Power supply with integrated controls - 12V	Power supply with integrated controls - 24V
102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)	102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)
Controls - 12V	Controls - 24V
102788 - OT DMX RGBW DIM 12/24V - 89W	102788 - OT DMX RGBW DIM 12/24V - 183W
101047 - OTI DALI DIM 60W 1CH	101047 - OTI DALI DIM 120W 1CH
101046 - OT DIM 60W (1-10V)	101046 - OT DIM 60W (1-10V)



Arpool Style



Linear light with high performance optics for underwater use. Design and decorative stainless steel painted flange with tempered glass lens and glare control for recessed installation.



Arpool Style

> Electrical

12/24 VDC fixture voltage

H - 62W/m - 1800 lm

H - 52W/m - RGBW

> Technical

IP68

CLASS III

UL STD 676

CSA C22.2#89

Corrosion

protection C4

Severe ISO9227

Installation depth 5m

Concrete and SS pools

Chlorine and salty

environment

Stainless steel 316L

Cable 3m, 6m 9m

> Color

30 - 3000K

40 - 4000K

RGBW

2 Step MacAdam

CRI: > 85


> Optics



GR

Graze 10°x50°

> Installation

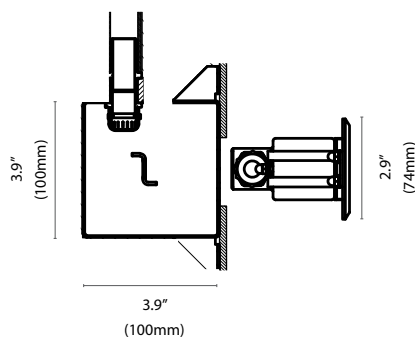

> Installation housing order codes

AR413

AR415

Ordering Information

AY		H			12	
Model	Length	Power	Color Temp.	Optics	Voltage	Options
AY	320 620	H	30 40 RGBW	GR	12 24	C - standard length 10' (3m) C6 - 6m (20') cable length C9 - 9m (30') cable length



Power Supply

Power supply On/Off - 12V

101052 - OT30 12V P

101053 - OT60 12V P

100879 - OT120 12V P

Power supply with integrated controls - 12V

102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)

Controls - 12V

102788 - OT DMX RGBW DIM 12/24V - 89W

101047 - OTI DALI DIM 60W 1CH

101046 - OT DIM 60W (1-10V)

Power supply On/Off - 24V

103233 - OT60 24V P

103196 - OT130 24V P

103234 - OT250 24V P

Power supply with integrated controls - 24V

102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS)

Controls - 24V

102788 - OT DMX RGBW DIM 12/24V - 183W

101047 - OTI DALI DIM 120W 1CH

101046 - OT DIM 60W (1-10V)



Arpool Linear Surface



Linear light with high performance optics for underwater use. Stainless steel housing with tempered glass lens for surface installation.



Arpool Linear Surface

> Electrical

12/24VDC fixture voltage

L - 39W/m - 2652 lm

H - 63W/m - 4384 lm

L - 47W/m - RGBW

> Technical

IP68

CLASS III

UL STD 676

CSA C22.2#89

Installation depth 5m

Pools and water features

Chlorine and salty

environment

Stainless steel 316L

Cable 3m, 6m 9m

> Color

30 - 3000K

40 - 4000K

RGBW

2 Step MacAdam

CRI: > 85

> Optics



SP Spot 17°



FL Flood 31°



GR
Graze 14°x40°




GR20
14°x 40° tilt 20



GRW Graze 10°x60°

> Installation

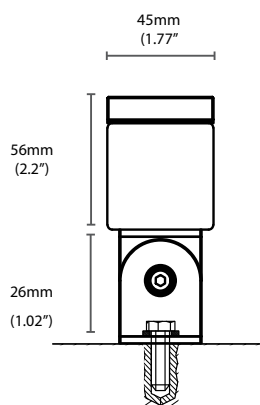

Ordering Information

ALS		H			12	
Model	Length	Power	Color Temp.	Optics	Voltage	Options
ALS	320 620	L	30	SP	12	C - standard lenght 10' (3m)
			40	FL	24	C6 - 6m (20') cable lenght
		H	RGBW	GR		C9 - 9m (30') cable lenght
			30	GR20		
			40	GRW		



Power Supply	
Power supply On/Off - 12V 101052 - OT30 12V P 101053 - OT60 12V P 100879 - OT120 12V P Power supply with integrated controls - 12V 102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS) Controls - 12V 102788 - OT DMX RGBW DIM 12/24V - 89W 101047 - OTI DALI DIM 60W 1CH 101046 - OT DIM 60W (1-10V)	Power supply On/Off - 24V 103233 - OT60 24V P 103196 - OT130 24V P 103234 - OT250 24V P Power supply with integrated controls - 24V 102345 - ELDOLED Linear Drive 100S (DXM,DALI+PS) Controls - 24V 102788 - OT DMX RGBW DIM 12/24V - 183W 101047 - OTI DALI DIM 120W 1CH 101046 - OT DIM 60W (1-10V)

PAZIN _{HQ}

FRANKFURT

LONDON

DUBAI

FRANKFURT

NEW YORK

HONG KONG





